District I 1625 N. French Dr , Hobbs, NM 88240 District II 1301 W Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

# State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office. For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Proposed Alternative Method Permit or Closure Plan Application

Pit, Closed-Loop System, Below-Grade Tank, or
Proposed Alternative Method Permit or Closure Plan Application
Type of action:    Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method   Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method   Modification to an existing permit   Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request
lease be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the avironment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
ı. Operator: _CDX Gas LLC OGRID #:222374
Address:2700 Farmington Ave, Building K, Suite #1
Facility or well name:Jicarilla Apache 102 #010E
API Number:30-039-22455 OCD Permit Number:
U/L or Qtr/QtrKSection4 Township26N Range4W County:Rio Arrıba
Center of Proposed Design: Latitude36.51307 Longitude107.26024 NAD: □1927 ⊠ 1983
Surface Owner:  Federal State Private Tribal Trust or Indian Allotment
2.    Pit: Subsection F or G of 19.15.17.11 NMAC   RCVD SEP 12 '08
Temporary: Drilling Workover OIL CONS. DIV.
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A DIST. 3
☐ Lined ☐ Unlined Liner type: Thicknessmul ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other
☐ String-Reinforced
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D
Subsection H of 19.15.17.11 NMAC  Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of
intent) □ Drying Pad □ Above Ground Steel Tanks □ Haul-off Bıns □ Other

☐ Lined ☐ Unlined Liner type: Thickness \_\_\_\_\_ mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other

Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)  Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church)  Four foot height, four strands of barbed wire evenly spaced between one and four feet  Alternate. Please specify_Four foot hog wire	hospital,
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)  Screen Netting Other  Monthly inspections (If netting or screening is not physically feasible)	
Signs: Subsection C of 19.15.17.11 NMAC  ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers  ☐ Signed in compliance with 19.15.3.103 NMAC	
Administrative Approvals and Exceptions:  Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.  Please check a box if one or more of the following is requested, if not leave blank:  Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval.  Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the approoffice or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying above-grade tanks associated with a closed-loop system.	priate district pproval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☒ No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to temporary, emergency, or cavitation pits and below-grade tanks)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☑ No ☐ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to permanent pits)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☑ No ☐ NA
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ⊠ No
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes 🖾 No
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☑ No
<ul> <li>Within an unstable area.</li> <li>Engineering measures incorporated into the design; NM Bureau of Geology &amp; Mineral Resources; USGS; NM Geological Society; Topographic map</li> </ul>	☐ Yes ⊠ No
Within a 100-year floodplain FEMA map	☐ Yes ☑ No

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC  Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9  Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC  Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC  Previously Approved Design (attach copy of design) API Number:  Previously Approved Operating and Maintenance Plan API Number:  (Applies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
13.
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.    Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC   Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC   Climatological Factors Assessment   Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC   Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC   Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC   Climatological Factors Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC   Quality Control/Quality Assurance Construction and Installation Plan   Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC   Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC   Nuisance or Hazardous Odors, including H <sub>2</sub> S, Prevention Plan   Emergency Response Plan   Oil Field Waste Stream Characterization   Monitoring and Inspection Plan   Erosion Control Plan   Erosion Control Plan   Erosion Control Plan   Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
14. Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative  Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.  □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.D Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if m facilities are required.	
Disposal Facility Name: Disposal Facility Permit Number:	
Disposal Facility Name: Disposal Facility Permit Number:	
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future serving Yes (If yes, please provide the information below) No	ace and operations?
Required for impacted areas which will not be used for future service and operations:  Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	;
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate districtions of acceptable source provided an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.	ict office or may be
Ground water is less than 50 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 50 and 100 feet below the bottom of the buried waste  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No
	Yes No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan by a check mark in the box, that the documents are attached.    Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC   Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC   Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC   Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.1   Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC   Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC   Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC   Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards canno   Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC   Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	5.17.11 NMAC

Operator Application Certification:  I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.
Name (Print):Lee Gardner Title:HSE Coordinator
Name (Print): _Lee Gardner
e-mail address:lee.gardner@cdxgas.com
OCD Approval: Permit Application (including dosure plan) Cosure Plan (only) OCD Conditions (see attachment)  OCD Representative Signature:  Approval Date: 4/09/2012  Title: OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC  Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.  Closure Completion Date:
22.  Closure Method:  Waste Excavation and Removal On-Site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only)  If different from approved plan, please explain.
23.
Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:  Instructions: Please indentify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.  Disposal Facility Name:
Re-vegetation Application Rates and Seeding Technique
Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached.    Proof of Closure Notice (surface owner and division)   Proof of Deed Notice (required for on-site closure)   Plot Plan (for on-site closures and temporary pits)   Confirmation Sampling Analytical Results (if applicable)   Waste Material Sampling Analytical Results (required for on-site closure)   Disposal Facility Name and Permit Number   Soil Backfilling and Cover Installation   Re-vegetation Application Rates and Seeding Technique   Site Reclamation (Photo Documentation)   On-site Closure Location: Latitude Longitude NAD:1927 1983
25.
Operator Closure Certification:  I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print): Title:
Signature: Date:
e-mail address:Telephone:

# CDX Gas, LLC Tapicito Project Jicarilla Apache Nation, San Juan Basin

Jicarilla Apache 102 #010E

**Below Grade Tank** 

Well API: 30-039-22455

TWP: 26 N - Range: 4 W - Sec. 4; 1700 FSL 1530 FWL

### **Siting Criteria Compliance**

- For Ground water is not less than 50 feet below the bottom the subject location
- The subject location is <u>not</u> within 300 feet of a continuously flowing watercourse.
- The subject location is <u>not</u> within 200 feet of any significant watercourse, lakebed, sinkhole or playa lake
- The subject location is <u>not</u> within 300 feet of a known permanent residence, school, hospital, institution or church
- The subject location is <u>not</u> within 500 feet of any known private domestic fresh water well or 1000 feet of any other fresh water well spring
- The subject location is <u>not</u> within any known incorporated municipal boundary
- The subject location is <u>not</u> within 500 feet of a known wetland
- The subject location is <u>not</u> within a known unstable area
- The subject location is <u>not</u> within a known 100 year flood plain
- > The subject location is not over any known subsurface or surface mine

### **Regional Geologic Setting**

At CDX's Tapicito Project located in the eastern-central portion of the San Juan Basin, within the Jicarilla Apache Indian Nation, the San Jose Formation outcrops and forms the surface landscape.

The San Jose Formation outcrops in the eastern-northeastern portion and covers ~1/6<sup>th</sup> of the San Juan Structural Basin. The San Jose Formation overlies the Nacimiento Formation in the area generally south of the CO-NM state line, and overlies the Animas Formation in the area generally north of the CO-NM state line (Fassett, 1974, p. 229). The basal contact of the San Jose varies with location in the basin. This contact is a disconformity along the basin margins, and it is an angular unconformity along the Naciemento Uplift; the contact is conformable in the central basin (Baltz, 1967, p. 54; Fassett, 1974 p. 229).

The Eocene-aged San Jose Formation was deposited in various fluvial-type environments (Baltz, 1967, p 44-45) and consists of interbedded sequence of sandstone, siltstone and shale. The sandstone are buff to yellow and rusty-colored, crossbedded, very fine to coarse-grained arkose, which are locally conglomeratic and contain abundant silicified wood (Baltz, 1967, p. 46; Fassett, 1974, p 229; Anerholm, 1979, p. 23).

Hydrogeological Report Jicarilla 102 #10E Peter Kondrat

Thickness of the San Jose Formation generally increases from west to east. Fassett (1974, p 229) reported a maximum thickness if 2,400 feet in the east-central part of the basin, and Stone and other (1983, p. 25) reported a range of from about 200 feet in the west and south to almost 2,700 feet in the center of the structural basin.



# **New Mexico State Land Office**

Oil, Gas, and Minerals Land/Lease Information Map

0 0 0250 05 0 1 0.15 0.2 Miles

Universal Transverse Mercator Projection, Zone 13 1983 North American Datum The New Mexico State Land Office assumes no responsibility or liability for, or in connection with, the accuracy, reliability or use of the information provided here, in State Land Office data layers or any other data layer

Land Office Geographic Information Center logic@slo state nm us

Created On: 8/21/2008 1 41:22 PM



### **LEGEND**

- County Seats
- SLO District Offices
- ((( City, Town or Village
- k Volcanic Vents

### NMOCD Oil, Gas Wells

- ☆ Carbon Dioxide
- ⇔ Gas
- Injection
- o Miscellaneous
- Oil
- △ Salt Water Disposal
- ♦ Water
- ♦ DA or PA

### Federal Subsurface Ownership

All Minerals

Coal Only

Oil and Gas Only

Oil, Gas and Coal Only

Other Mmerals

### State Trust Lands Ownership

Surface Estate

\_\_\_\_ Subsurface Estate

Both Estates

#### State Lease Types

Commercial Leases

Minerals Leases

Oil and Gas Leases

Agricultural Leases

Oil, Gas Leasing Influenced By Restriction

Not Available for Oil, Gas Leasing

#### Other Boundaries

--- Continental Divide


State Boundary

County Boundaries

Oil and Gas Unit Boundary

Geologic Regions

For detailed legend of the Geologic Map of New Mexico, Please see http://geoinfo.nmt.edu/

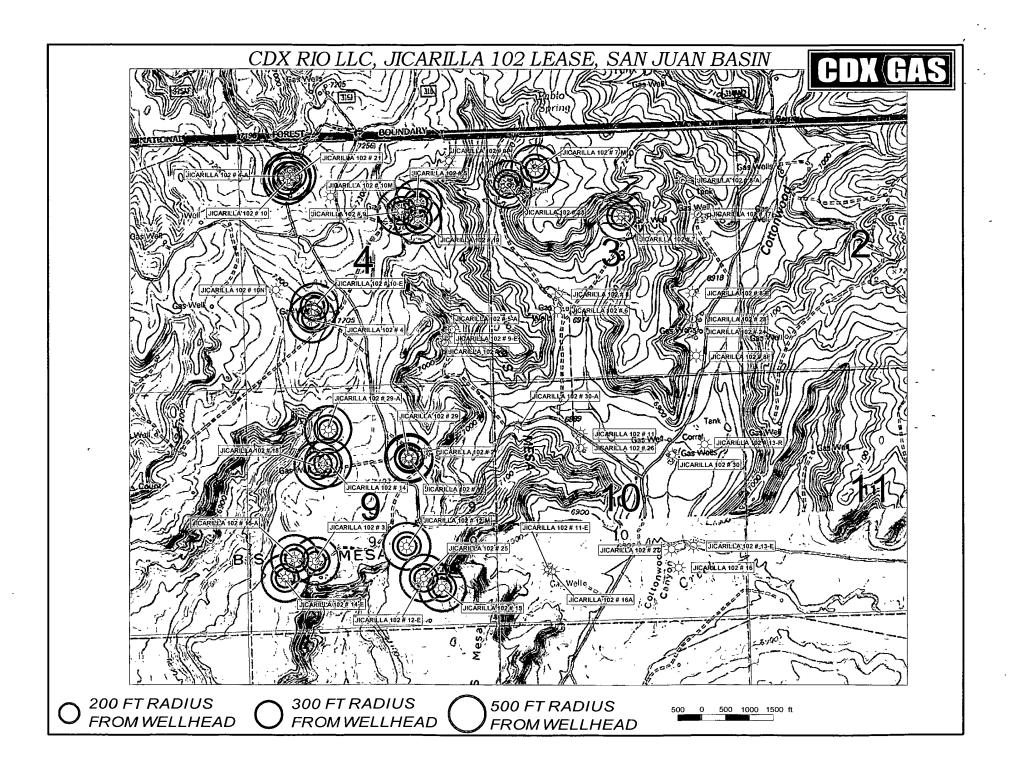



Hydrogeological Report Jicarilla 102 #10E Peter Kondrat

### **Ground Water Data, Water Well Locations**

Hydraulic Properties: Levings and Others (1990) reported well yields from 79 water wells completed in the San Jose, Nacimiento and Animas Formations ranged from 1 to 61 gallons per minute and median is 6 gallons per minute. Transmissivity data for the San Jose, Nacimiento and Animas Formations are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone and Others, 1983, table 5). The San Jose, Nacimiento and Animas Formations are a source of water for public supply, commercial, private-domestic and livestock use in areas where drilling depths and pumping levels are economically feasible and where water quality is suitable.

The San Jose, Nacimiento and Animas Formations are all hydrologically similar because sands in all units produce approximately the same quantities of water. The great percentage of fine material in all may restrict the downward vertical leakage to the Ojo Alamo Sandstone or Kirtland Shale. The poorly cemented material is highly erodible, forms a badland terrain and supports only spotty vegetation. These conditions are more conductive to runoff than retention of precipitation.

**iWaters Database:** The search showed no reported wells with groundwater information in the **T26N-R4W**. Attached are the results for the three query engines: 1) POD/Surface Data Report, 2) Avg Depth to Water Report, 3) Water Column Report

- For Ground water is not less than 50 feet below the bottom the subject location
- No known private water wells are within 500 feet of the subject location
- No known public water wells are within 1000 feet of the subject location
- No water wells around the subject area are listed in the iWaters Database

# New Mexico Office of the State Engineer POD Reports and Downloads

	POD Reports and Downloads
	Township: 26N Range: 04W Sections:
	NAD27 X: Y: Zone: Search Radius:
	County:
	Owner Name: (First) (Last) Onn-Domestic Odmestic
	POD / Surface Data Report Avg Depth to Water Report Water Column Report
	Clear Form iWATERS Menu Help
	-
	POD / SURFACE DATA REPORT 08/25/2008  (quarters are 1=NW 2=NE 3=SW 4=SE) (acre ft per annum)  (quarters are biggest to smallest
DB File Nbr	(acre ft per annum)(quarters are biggest to smallestUse Diversion OwnerPOD NumberSource Tws Rng Sec q q q

No Records found, try again

# New Mexico Office of the State Engineer POD Reports and Downloads

Town	iship: 26N	Range: 04W	Sections:			
NAD27	X:	Y:	Zone:		Search Radius:	
County:	Basi	n: -		Nun	nber: Suffix:	
Owner Name: (Fire	st)	(Last)		_ 0	Non-Domestic ODomestic	⊚ All
POD / Surfac	e Data Repo	t Avg	Depth to Water F	Report	t Water Column Repo	t
	(	Clear Form	iWATERS Mer	nu	Help	

AVERAGE DEPTH OF WATER REPORT 08/25/2008

(Depth Water in Feet)
Bsn Tws Rng Sec Zone X Y Wells Min Max Avg

No Records found, try again

# New Mexico Office of the State Engineer POD Reports and Downloads

POD Reports and Downloads
Township: 26N Range: 04W Sections:
NAD27 X: Y: Zone: Search Radius:
County:
Owner Name: (First) (Last) Onn-Domestic Onnestic
POD / Surface Data Report Avg Depth to Water Report Water Column Report
Clear Form iWATERS Menu Help
WATER COLUMN REPORT 08/25/2008  (quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest)  POD Number  Tws Rng Sec q q q Zone X Y Well Water Column

No Records found, try again



Hydrogeological Report Jicarilla 102 #10E Peter Kondrat


## Wetland Maps and Data


The US Fish and Wildlife for the **Jicarilla 102 #10E** is unavailable due to its location being within the Jicarilla Apache Indian Nation. The US Fish and Wildlife does not have wetland information for the Jicarilla Apache Indian Nation. This well is not located near a wash or watercourse and is not in a wetland area as visible on the topographic map.

# Flood Zone Maps and Data

The FEMA Map for the **Jicarilla 102 #10E** is unavailable due to its location being within the Jicarilla Apache Indian Nation. FEMA does not provide floodplain information for the Jicarilla Apache Indian Nation. This well is not located near a wash or watercourse and is not in a 100 year floodplain as visible on the topographic map.

# CDX'S TAPICITO PROJECT SAN JUAN BASIN MINES, MINERALS AND QUARRIES WEB MAP

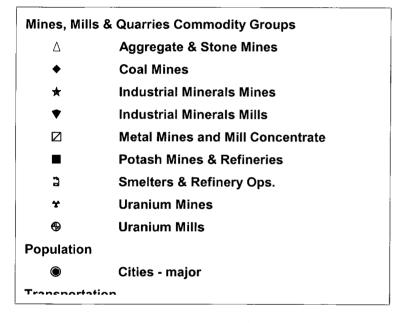

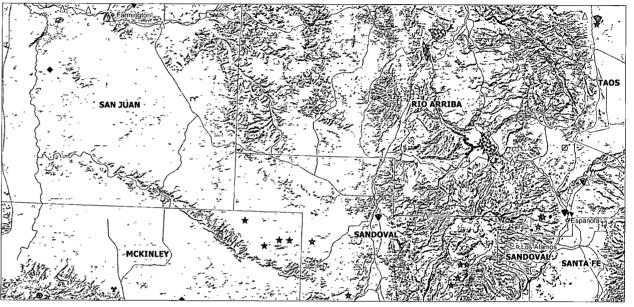







### Below Grade Tank Management Plan

### I. Siting Criteria

1 1 mm

- 1. No below grade tank may be located where:
  - a. Ground water is less than 50 feet below the bottom of the temporary pit or below grade tank.
  - b. Within 300 feet of a continuously flowing watercourse
  - c. Within 200 feet of any significant watercourse, lakebed, sinkhole or playa lake
  - d. Within 300 feet from a permanent residence, school, hospital, institution or church
  - e. Within 500 feet of a private domestic fresh water well or spring used by less than five households for domestic or stock watering purposes or within 1000 feet of any other fresh water well spring.
  - f. Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3 as amended, unless the municipality specifically approves
  - g. Within 500 feet of a wetland
  - h. Within an unstable area
  - i. Within a 100 year flood plain
  - j. Over or near any known or suspected mined area
- 2. If ground water is an issue, the tank shall be placed above ground in a lined berm.
- 3. All excavated material will be stored at least 300 feet from any continuous flowing water and 200 feet away from any other water way.

### II. Construction:

- 1. After June 16, 2008 any below grade tank replacement will use only steel double walled, double bottom tanks with a leak detection system.
- 2. The below grade tank pit bottom shall be free on any rocks, debris, sharp edges, or irregularities
- 3. Prior to the installation of any tank, the soil shall be sampled for
  - a. Chlorides
  - b. Benzene, toluene, ethyl benzene, and xylene
  - c. Benzene
  - d. Total petroleum hydrocarbons.
- 4. A fence meeting one of the following requirements shall be erected around the tank site consisting of:
  - a. Four strands of barbed wire placed on a pole between one and four feet

- b. A chain link fence six feet tall and topped with at least two strands of barbed wire when the temporary pit is within 1000 feet of a residence, school, hospital, institution or church. The fence shall have a gate which is locked when responsible personnel are not on-site.
- c. Oil Conservation Division approved alternative

  Note: CDX Gas uses Jicarilla Apache Tribal approved hog wire with a
  barbed wire top
- 5. Any open top tank shall be covered with netting, expanded metal, or "chicken wire" to prevent wildlife from entering the tank.
- 6. Any tank area shall be bermed to prevent the run on of water.

### III. Operations and Maintenance:

- 1. All tanks and existing pits shall be inspected each month as a part of the Spill Prevention Control and Countermeasure facility inspection.
- 2. The inspection shall be documented on the Spill Prevention Control and Countermeasures Plan inspection form and maintained for at least five years.
- 3. All sides of the below grade tanks existing before June 16, 2008 shall be visible.
- 4. Any dirt or debris shall be noted on the inspection form and removed promptly.
- 5. Any oil visible on the surface of the fluid in the below grade tank shall be promptly removed.
- 6. Absorbent materials shall be maintained on site for this purpose.
- 7. Each below grade tanks shall have enough free board to prevent overflowing.
- 8. Any spillage or leak shall be reported to the Oil Conservation Division with in 48 hours of detection.
- 9. Any produced waste shall be disposed at either:
  - a. Basin Disposal (permit number NM-01-005)
  - b. Aquamoss (permit number SWD-1034A)

### IV. Closure:

- 1. Current configuration consists of one single walled steel tank which does meet 19.15.17 NMAC. The tank will be replaced with steel, double walled, double bottomed tanks having a leak detection system by June 16 2013.
- 2. The tank shall be recycled, reused, reclaimed or disposed of in an Oil Conservation Division approved manner.
- 3. Any existing below grade tank which does not show integrity shall be immediately removed from service.
- 4. The soil under a pit shall be sampled for:
  - a. Benzene as determined by Environmental Protection Agency SW-846 method 8012B or 8260B or other Environmental Protection Agency method that the Oil conservation Division approves. The test shall not exceed 0.2 mg/kg.
  - b. Total Petroleum Hydrocarbons as determined by the Environmental Protection Agency SW-846 method 8021B or 8260B or other