District I 1625 N French Dr, Hobbs, NM 88240 District II 1301 W Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St Francis Dr, Santa Fe, NM 87505

State of New Mexico **Energy Minerals and Natural Resources** Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office. For permanent pits and exceptions submit to

the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

985

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method

Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system,

below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
I.
Operator:McElvain Oil & Gas Properties, Inc OGRID #:22044
Address:1050 17 th Street , Suite 1800, Denver, CO 80265
Facility or well name: _New Horizon #1
API Number:30-039-23630 OCD Permit Number:
U/L or Qtr/Qtr _O Section _ 2 _ Township 24N Range _ 2W County: Rio Arriba
Center of Proposed Design: Latitude36.33513 N Longitude -107.01594 W NAD: ⊠1927 □ 1983
Surface Owner: Federal State Tribal Trust or Indian Allotment
Pit: Subsection F or G of 19.15.17.11 NMAC
Temporary: Drilling Workover
Permanent Emergency Cavitation P&A
Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other
String-Reinforced
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D
3.
Closed-loop System: Subsection H of 19 15.17.11 NMAC
Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other
Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other
Liner Seams: Welded Factory Other
4. Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume:18
Below-grade tank: Subsection I of 19.15.17.11 NMAC
Volume:18
Tank Construction material:Steel
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other
Liner type: Thicknessmil
5. Alternative Methods

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

1	
Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)	
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church)	'iospital,
Four foot height, four strands of barbed wire evenly spaced between one and four feet	
☐ Alternate. Please specify4 " Hog wire w/ top rail = 4'	
7.	
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	
Screen Nctting Other Expanded Metal	
Monthly inspections (If netting or screening is not physically feasible)	
8. Signs: Subsection C of 19.15.17.11 NMAC	
☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
☑ Signed in compliance with 19.15.3.103 NMAC	
Administrative Approvals and Exceptions:	
Justifications and/or demonstrations of equivalency are required. Please refer to 19.15 17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank:	
Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau of	office for
consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval	
10.	
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept	otable source
material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appro- office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a	priate district
Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dryi	
above-grade tanks associated with a closed-loop system.	☐ Yes ☑ No
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).	☐ Yes ☒ No
- Topographic map; Visual inspection (certification) of the proposed site	
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	☐ Yes ☐ No 図 NA
(Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	⊠ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	☐ Yes ☐ No 図 NA
 (Applies to permanent pits) Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	NA NA
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock	☐ Yes ☒ No
watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	☐ Yes ⊠ No
adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	
Within 500 feet of a wetland.	☐ Yes ⊠ No
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	l les 🔼 No
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☒ No
Within an unstable area.	☐ Yes ⊠ No
 Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	
Within a 100-year floodplain.	☐ Yes ☑ No

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are
attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number: (Applies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Erosion Control Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type. Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15 17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.1 Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if facilities are required.	
Disposal Facility Name: Disposal Facility Permit Number:	
Disposal Facility Name: Disposal Facility Permit Number:	
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that <i>will not</i> be used for future ser Yes (If yes, please provide the information below) No	vice and operations?
Required for impacted areas which will not be used for future service and operations Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMA Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	С
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sou provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate dist considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Just demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.	rict office or may be
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search: USGS: Data obtained from nearby wells	Yes No
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
 Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	☐ Yes ☐ No
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	Yes No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No
Within a 100-year floodplain FEMA map	☐ Yes ☐ No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure problem of the check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cant Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	15.17.11 NMAC

10.1 (-14)

On Conscient on Division

Page 4 of 5

Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.
Name (Print): Deborah K Powell Title: _Engineering Tech Supervisor
Signature: Debt 10 Powell Date: 9-8-08
e-mail address: DebbyP@McElvain.com Telephone: 303-893-0933
20. OCD Approval: Permit Application (including closure plan) L Closure Plan (only) OCD Conditions (see attachment)
OCD Representative Signature: 4/25/2012
Deputy Oil & Gas\Inspector, ()
Title: OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.
Closure Completion Date:
Closure Method: Waste Excavation and Removal On-Site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only) If different from approved plan, please explain.
23. Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: Instructions: Please indentify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.
Disposal Facility Name: Disposal Facility Permit Number:
Disposal Facility Name: Disposal Facility Permit Number:
Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations? Yes (If yes, please demonstrate compliance to the items below) No
Required for impacted areas which will not be used for future service and operations Site Reclamation (Photo Documentation)
Soil Backfilling and Cover Installation
Re-vegetation Application Rates and Seeding Technique
Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached.
☐ Proof of Closure Notice (surface owner and division) ☐ Proof of Deed Notice (required for on-site closure)
☐ Plot Plan (for on-site closures and temporary pits)
 ☐ Confirmation Sampling Analytical Results (if applicable) ☐ Waste Material Sampling Analytical Results (required for on-site closure)
☐ Disposal Facility Name and Permit Number
☐ Soil Backfilling and Cover Installation ☐ Re-vegetation Application Rates and Seeding Technique
Site Reclamation (Photo Documentation)
On-site Closure Location: Latitude Longitude NAD: \[\begin{array}{c} 1927 \begin{array}{c} 1983 \end{array}
Operator Closure Certification:
I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print):
Signature: Date:
e-mail address:

District 1

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe. NM 87505

Form C-102 Revised August 15, 2000 Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT API Number ² Pool Code ³ Pool Name 72319 Blanco Mesaverde 30-039-23630 Property Code Property Name Well Number New Horizon 8 Operator Name OGRID No. Elevation 7253 McElvain Oil & Gas Properties, Inc. 22044 Surface Location UL or lot no. Feet from the North/South line Feet from the East/West line Section Township Range Lot Idn County 0 2 24N 2W 990 South 1850 East Rio Arriba Bottom Hole Location If Different From Surface Section Township UL or lot no. Lot Idn North/South line East/West line County Range Feet from the Feet from the 12 Dedicated Acres ³ Joint or Infill Consolidation Code Order No. 320

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTILALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

16	T			TODED ATOD CERTIFICATION
'				17 OPERATOR CERTIFICATION
1				I hereby certify that the information contained herein
				is true and complete to the best of my knowledge and
			i	belief
				beneg
			i	
				Signature
				John Steuble
				Printed Name
			!	Engineering Manager
				Title
				7-9-2003
			1	Date
		NM 23032	i	
				18 SURVEYOR CERTIFICATION
			Ī	I hereby certify that the well location shown on this
				plat was plotted from field notes of actual surveys
				made by me or under my supervision, and that the
				same is true and correct to the best of my belief
			ļ	October 10, 1984
				Date of Survey
				Signature and Seal of Professional Surveyor
			J	This location was originally
		X - 1	1850'	surveyed by Edgar L. Risenhoover
				Sarveyed by Edgar E. Riserinoover
		990'	į	
				5979
			1	Certificate Number
L	<u>L</u>	<u> </u>		

New Mexico Office of the State Engineer POD Reports and Downloads

Township: 24N Range: 02W Sections:
NAD27 X: Y: Zone: Search Radius:
County: RA Basin: Number: Suffix:
Owner Name: (First) (Last) C Non-Domestic C Domestic All
POD/ Surface Data Report Avg Depth to Water Report Water Column Report
Clear Form WATERS Menu Help


WATER COLUMN REPORT 08/14/2008


the state of the s				3=SW 4=SE)						
				smallest)			Depth	Depth		(in feet)
POD Number	Tws	Rng Sec		Zone	x	Y	Well	Water	Column	
RG 67667	24N	02W 07	3 1 2				245	100	145	
RG 44509	24N	02W 25	2 3				580	240	340	
SJ 03703 POD1	24N	02W 01	2 1 4				670	397	273	
SJ 02939	24N	02W 02	2 2 3				600			
SJ 02454 DCL	24N	02W 02	4 1 4				300	240	60	
SJ 02454	24N	02W 02	4 1 4				300	240	60	
SJ 02198	24N	02W 02	4 2 2				320	140	180	
SJ 03504	24N	02W 02	4 2 3				2309			
SJ 02971	24N	02W 04	4 4 4				320	200	120	
SJ 02948	24N	02W 04	4 4 4				39	22	17	
SJ 01759	24N	02W 07	1 4 2				355	100	255	
SJ 01191	24N	02W 07	2 1 1				320	190	130	
SJ 02841	24N	02W 07	3 1 2				245	100	145	
SJ 02669	24N	02W 07	4 3 3				986	776	210	
SJ 02433	24N	02W 10	3 3 2				265			
SJ 02259	24N	02W 16	2 4 4				1133	615	518	
SJ_02259 CLW223800	24N	02W 16	4 4 4				755	150	605	
SJ 02959	24N	02W 19	4 3 3				60			
SJ 02957	24N	02W 19	4 4 4				30			
SJ 02315 CLW228854	24N	02W 24	2 3				580	240	340	
SJ 02173	24N	02W 25	2 1 4				504	340	164	
SJ 02315	24N	02W 25	2 2				840	605	235	•
SJ 01997	24N	02W 25	2 2 1				400	220	180	
SJ 02315 CLW152976	24N	02W 25	2 3				780	605	175	
SJ 02240	24N	02W 26	1 1 2				520	442	78	
SJ 02806	24N	02W 26	1 3 3				310	150	160	
SJ 01265	24N	02W 27	1 1 1				1060	1000	60	
SJ 02244	24N	02W 27	1 3 4				265	100	165	
SJ 02582	24N	02W 27	1 4 1				143	140	3	
SJ 02583	24N	02W 27	1 4 2				140	100	40	
SJ 00073	24N	02W 28	1 1 2				629	240	389	
SJ 00212	24N	02W 28	1 2 2				1300	470	830	
SJ 02354	24N	02W 28	2 1				620	271	349	
SJ 00072	24N	02W 29	2 1 1				476	287	189	
SJ 01421	24N	02W 30	1				380	200	180	
SJ 02581	24N	02W 36	4 4 1				800	500	300	

Record Count: 36


Rio Arriba Mines, Mills And Quarries Web Map

Mines, Mills	s & Quarries Commodity Groups	
Δ	Aggregate & Stone Mines	
•	Coal Mines	
*	Industrial Minerals Mines	
•	Industrial Minerals Mills	
Z	Metal Mines and Mill Concentrate	
	Potash Mines & Refineries	
3	Smelters & Refinery Ops.	
*	Hranium Minee	

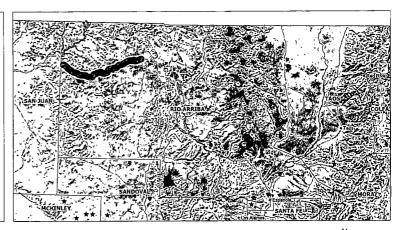







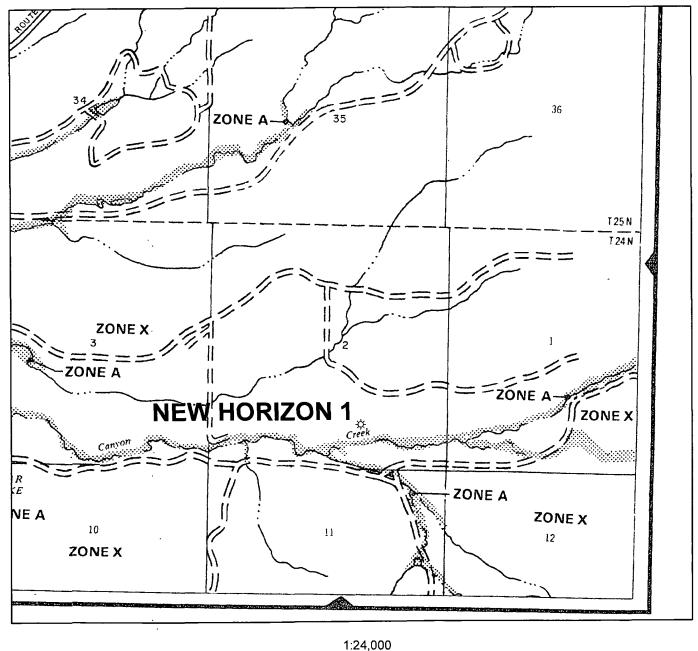

950 1,900

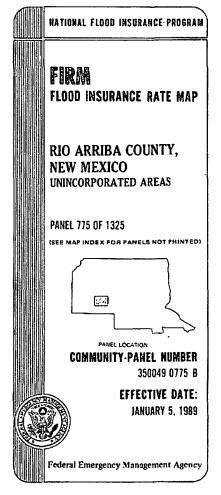


3,800 5,700 7,600

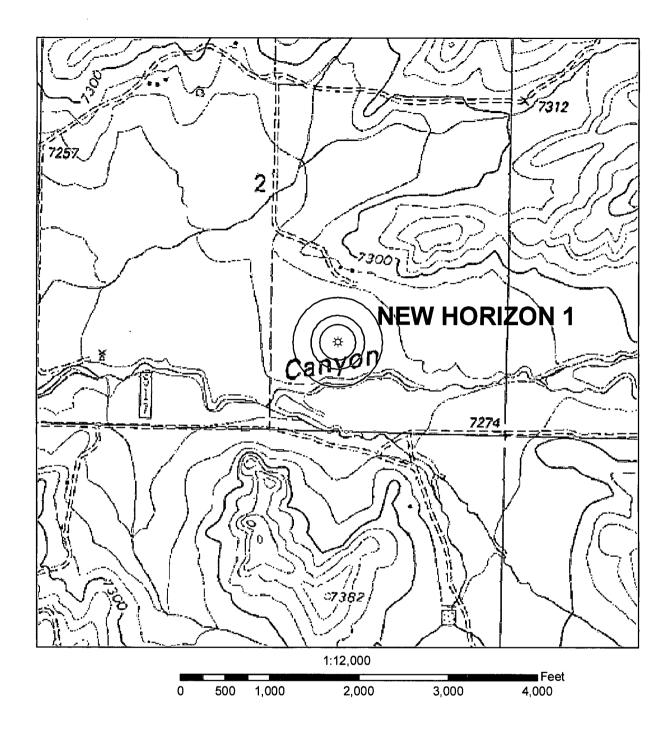


Legend

Source: USGS 1:24,000 Scale Topographic Map Series San Juan Basin New Mexico Township 24N 2W Section 2

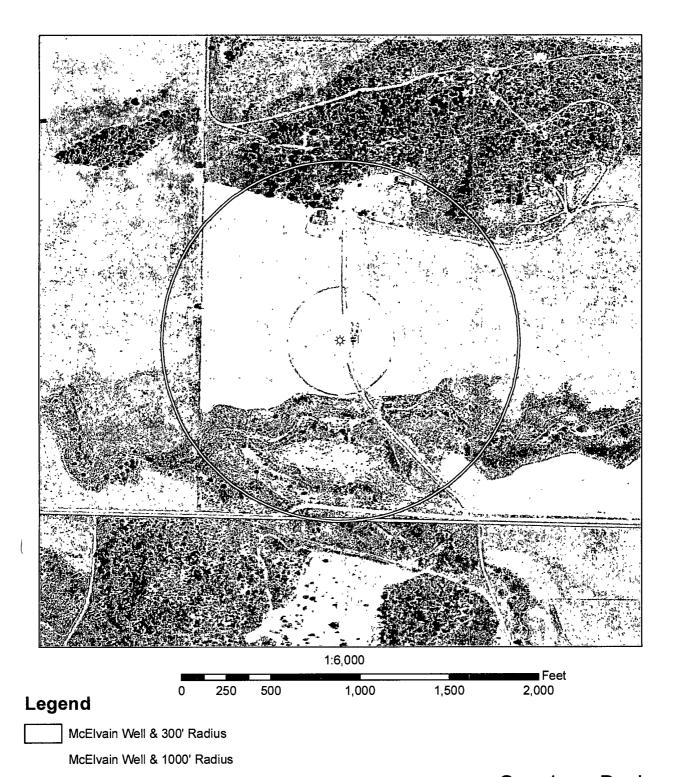

Aerial Source: NM Resource Geographic Information System Program made available by the University of New Mexico and the State of New Mexico 2005-2006 vintage Digital Orthophoto Quarter-Quadrangles were derived from the New Mexico Statewide Orthophotography Project. Source imagery flown at 35,000' above average ground.

San Juan Basin New Mexico Township 24N 2W Section 2

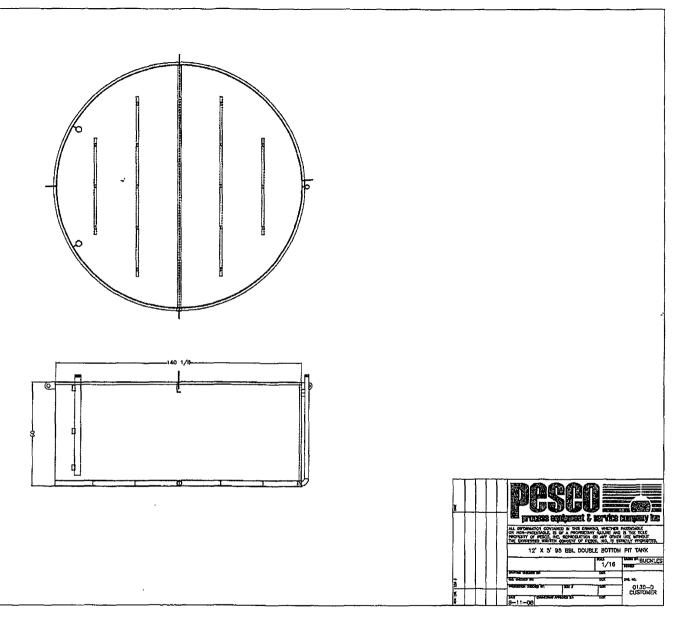

Siting Criteria Compliance Demonstrations

New Horizon #1 well is not located in an unstable area. The location is not over a mine and is not on the side of a hill. The location of the excavated pit material is not located within 300' of any continuously flowing watercourse or 200' from any other water course.

McElvain Oil & Gas Properties, Inc. San Juan Basin Below Grade Tank Design and Construction

In accordance with Rule 19.15.17 NMAC the following describes the as-built construction of the Below Grade Tank on the McElvain Oil & Gas Properties, Inc (MOG) New Horizon #1 well located in the SWSE of Sec 2, T24N, 2W.

As-built Installation:

- 1. The existing tank pit consists of an approximate 15 foot by 15 foot earth walled hole into which a 12 foot by 5 foot steel walled, double bottomed, 95 bbl tank with leak detection is installed.
- 2. The tank walls are open for visual inspection to identify the occurrence of leaks.
- 3. There is an expanded metal covering on the top of the below grade tank.
- 4. The tank pit is surrounded by a 30ft X 30ft X 2ft berm that is contained within a 50 ft X 140 ft berm that encloses the tank battery to prevent overflow or surface water run-on.
- 5. A general location sign is displayed on site.
- 6. The pit tank is fenced with 4 foot field fence with a top rail.

McElvain Oil & Gas Properties, Inc. San Juan Basin Below Grade Tank Maintenance and Operating Plan

In accordance with Rule 19.15.17 NMAC the following describes the below grade tank operation and maintenance plan for the McElvain Oil & Gas Properties, Inc (MOG) on the New Horizon #1 well located in the NWSE of Sec 2, T24N, 2W.

General Plan:

- 1. MOG shall operate and maintain the below grade tank to contain liquids and solids and prevent contamination of fresh water to protect the public health and environment.
- 2. MOG shall not allow a below grade tank to overflow or allow surface water run-on to enter the below grade tank.
- 3. MOG shall continuously remove any visible or measurable layer of oil from the fluid surface of a below grade tank in an effort to prevent significant accumulation of oil over time.
- 4. MOG shall inspect the below grade tank monthly and maintain a written record of each inspection for five years.
- 5. MOG shall maintain adequate freeboard to prevent overtopping of the below grade tank.

McElvain Oil & Gas Properties, Inc. San Juan Basin Closure Plan

In accordance with Rule 19.15.17.1 NMAC the following procedure describes the closure plan for the McElvain Oil & Gas Properties, Inc (MOG) below grade tank on the New Horizon #1 well located in the NWSE of Sec 2, T24N, 2W.

Closure Requirements:

- 1. MOG shall close the below grade tank within the time periods provided in 19.15.17.13 NMAC or by an earlier date that the division requires because of imminent danger to fresh water, public health, or the environment.
- 2. MOG shall close an existing below grade tank that does not meet the requirements of Paragraph (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008 if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.
- 3. MOG shall close a permitted below grade tank within 60 days of cessation of the below ground tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on C-144.
- 4. All liquids will be removed from the temporary permit prior to closure and the liquids disposed of in a division approved facility.
- 5. MOG shall remove the below grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.
- 6. MOG will remove any on-site equipment associated with the below grade tank unless the equipment is required for some other purpose.
- 7. MOG shall test the soils beneath the below grade tank to determine whether a release has occurred. MOG shall collect a five point composite sample and individual grab samples from any area that is wet, discolored, or showing other evidence of a release. The samples will be analyzed for BTEX, TPH, and chlorides to demonstrate that the benzene concentration as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration as determined by EPA method 418.1 or other EPA method that the division approves does not exceed 100 mg/kg; and the chloride concentration as determined by EPA

- method 300.1 or other EPA method that the division approves does not exceed 250 mg/kg or the background concentration, whichever is greater. MOG shall notify the division of its results on form C-141.
- 8. If MOG or the division determines that a release has occurred, then MOG shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC as appropriate.
- 9. If contamination is confirmed by field sampling. MOG will follow the Guidelines For Remediation Of Leaks, Spills, and Releases NMOCD August 1993 when remediating identified contaminants.
- 10. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, then MOG shall backfill the excavation with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover; re-contour, and re-vegetate the site.
- 11. Notice of closure will be given to the Aztec Division office between 72 hours and one week of closure via email or verbally. The notification of closure will include the following:
 - · Operator's name
 - · Location by Unit Letter, Section Township, and Range.
 - · Well name and API number
- 12. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the blow grade tank. The closure report will be filed on C-144 and incorporate the following:
 - · Details on capping and covering where applicable
 - · Inspection reports
 - · Sampling results
- 13. The site will be re-contoured to match the surrounding area. Natural drainages will be unimpeded and erosion control will be utilized where necessary.
- 14. MOG shall seed the disturbed areas the first growing season with a division approved seed mixture after pit closure. Seeding will be accomplished by drilling on the contour whenever possible or by other division approved methods. Repeat seeding or planting will be continued until successful vegetative growth occurs.
- 15. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the thickness of the topsoil native to the area, whichever is greater.

16. The surface owner shall be notified of MOG's closing of the below grade tank as per the approved closure plan using certified mail with return receipt requested.

Hydrogeological Report For

New Horizon #1

Surface Formation:

ġ,

San Jose Formation

Regional and Local Geology

The Tertiary San Jose Formation is a fluvial and alluvial deposit of Eocene age and is the youngest bedrock unit of the Tertiary in the San Juan Basin (Baltz, 1967). The San Jose is the surface formation in most of the central San Juan Basin to the eastern margin of the basin. Where it is buried, it is unconformably overlain by Quaternary sediments. It rests on an erosional surface over the Tertiary Nacimiento Formation south of the Colorado-New Mexico state line, and lies over the Cretaceous-Tertiary Animas north of the state line (Fassett, 1974). The San Jose has been differentially eroded, deeply in places, and has produced a varied to rugged physiography and a thickness range of less than 200' in the south to nearly 2700' in the eastern part of the basin (Stone et al., 1983).

Baltz (1967) subdivided the San Jose Formation into four members. In the area of this well, the lower half of the formation is made up of the Cuba Mesa Member, a conglomeratic arkosic sandstone containing lenticular shales and pebbles of volcanic rock in places. The Cuba Mesa Member is thought to have been deposited by streams flowing to the west and southwest from highlands east and northeast of the present basin boundary, composed of granite and metamorphic rocks of Precambrian age (Baltz, 1967). The Regina Member overlies the Cuba Mesa Member in this location and is mainly a silty to sandy mudstone containing thin lenses of poorly consolidated sandstone and claystone. The Regina Member also contains an abundance of swelling clays (Stone et al., 1983). The Regina Member intertonges with and grades into the Llaves Member to the north where it is overlain by the Tapacitos Member. Neither the Llaves nor Tapacitos Members are present at this location.

Hydraulic Properties

Tertiary and Quaternary hydrologic properties, regional flow patterns and water quality do not vary significantly from unit to unit. Where pumping levels and drilling depths are economically feasible and where water quality is suitable, the San Jose, Nacimiento and Animas Formations are a source of water for public-supply, commercial, private-domestic and livestock use. Water in the San Jose, Nacimiento and Animas Formations occurs under both water table and artesian conditions. Recharge to the aquifers is from infiltration of precipitation and stream flow on outcrops, and from vertical upward leakage of water from underlying strata (Levings et al., 1990). Rates of such leakage, however, are very low except in areas of intense fracturing (Stone et al., 1983).

Because of their lithology, the better-qualifying zones in the San Jose Formation would be the Cuba Mesa and Llaves Members. Cuba Mesa wells may yield 30 to 60 gallons per minute (gpm). Specific capacity of one well described is 0.23 gpm per foot of drawdown at 1 hour of pumping. The Cuba Mesa aquifer of the San Jose will yield water suitable for livestock and industrial use. The aquifers of Tertiary rocks yield water that is characteristically high in ions of sodium and sulfate. The removal of iron may be required (Stone et al., 1983).

Hydrology & Conclusion

A records search of the NM Office of the State Engineer iWaters database was conducted in a nine section area centered on the section in which lies the New Horizon #1 well location, 24N 2W section 2. Four wells with depth to water records were identified; average: 264', minimum: 140', max: 397'. Two water wells were found in section 2. One water well, with a depth to water of 140', is located on the valley floor nearest an intermittent stream bed. The other water well, with depth to water of 240', is higher in

elevation. The New Horizon #1 is located on the valley floor; therefore, depth to water at the New Horizon #1 location would be over 100'.

References

Baltz, E.H., 1967, Stratigraphy and Regional Tectonic Implications of Part of Upper Cretaceous Rocks, East-Central San Juan Basin, New Mexico, USGS Professional Paper 552, 101p.

Fassett, J.E., 1974, Cretaceous and Tertiary Rocks of the Eastern San Juan Basin, in Guidebook of Ghost Ranch, Central-Northern New Mexico, New Mexico Geological Society, 25th Field Conference, 404p.

Levings, G.W., Craigg, S.D., Dam, W.L., Kernodle, J.M., and Thorn, C.R., 1990, Hydrogeology of the San Jose, Nacimiento, and Animas Formations in the San Juan Structural Basin, New Mexico, Colorado, Arizona, and Utah, USGS Hydrologic Investigations Atlas HA-720-A, 2 sheets.

Scholle, P.A., 2003, Geologic Map of New Mexico 1:500,000, NM Bureau of Geology and Mineral Resources, published in cooperation with the USGS, 2 sheets.

Stone, W.J., Lyford, F.P., Frenzel, P.F., Mizell, N.H., and Padgett, E.T., 1983, Hydrogeology and water resources of San Juan Basin, New Mexico, New Mexico Bureau of Mines and Mineral Resources, Hydrologic Report 6, 70p.

BGT Closure Sampling Required by NMOCD Components Method

~ ~ ~ ~		
Benzene	EPA SW-846 8021B or 8260B	0.2 mg/Kg
Components	Method	Limit

Benzene	EPA SW-846 8021B or 8260B	0.2 mg/Kg
BTEX	EPA SW-846 8021B or 8260B	50 mg/Kg
TPH	EPA SW-846 418.1	100 mg/Kg
Chlorides	EPA 300.1	250 mg/Kg