<u>District I</u> . 1625 N. French Dr., Hobbs, NM 88240 *District II*
1301 W. Grand Avenue, Artesia, NM 88210 District III
1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Pit, Closed-Loop System, Below-Grade Tank, or

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.
For permanent pits and exceptions submit to the Santa Fe Environmental Burcau office and provide a copy to the appropriate NMOCD District Office.

Proposed Alternative Method Permit or Closure Plan Application
Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
Operator:McElvain Oil & Gas Properties, Inc OGRID #: 22044
Address:1050 17 th Street , Suite 1800, Denver, CO 80265
Facility or well name: _RUBY #I
API Number:30-045-33266 OCD Permit Number:
U/L or Qtr/Qtr _L Section3Township29N Range13W County:San Juan
Center of Proposed Design: Latitude36 45.193N Longitude108 11.955W NAD: ⊠1927 □ 1983
Surface Owner: Federal State Private Tribal Trust or Indian Allotment
2. Pit: Subsection F or G of 19.15.17.11 NMAC Temporary: Drilling Workover Permanent Emergency Cavitation P&A Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other
☐ String-Reinforced Liner Seams: ☐ Welded ☐ Factory ☐ Other Volume:bbl Dimensions: L x W x D
Liner Seams: Welded Factory Other Volume:bbl Dimensions: Lx Wx D 3.
Liner Seams: Welded Factory Other Volume: bbl Dimensions: Lx Wx D
Liner Seams: Welded Factory Other Volume:bbl Dimensions: Lx Wx D 3Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)
Liner Seams: Welded Factory Other Volume:bbl Dimensions: Lx Wx D 3Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)
Liner Seams: Welded Factory Other Volume:bbl Dimensions: Lx Wx D 3Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Drying Pad Unlined Liner type: Thickness mil LLDPE HDPE PVC Other Liner Seams: Welded Factory Other Other CFIVED Other CFIVED Closed-loop System: Subsection H of 19.15.17.11 NMAC X W x D X
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Drying Pad Unlined Liner type: Thickness mil LLDPE HDPE PVC Other Liner Seams: Welded Factory Other Other CFIVED Other CFIVED Closed-loop System: Subsection H of 19.15.17.11 NMAC X W x D X
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Drying Pad Unlined Liner type: Thickness mil LLDPE HDPE PVC Other Liner Seams: Welded Factory Other Other CFIVED Other CFIVED Closed-loop System: Subsection H of 19.15.17.11 NMAC X W x D X
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Drying Pad Unlined Liner type: Thickness mil LLDPE HDPE PVC Other Liner Seams: Welded Factory Other Other CFIVED Other CFIVED Closed-loop System: Subsection H of 19.15.17.11 NMAC X W x D X
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Drying Pad Unlined Liner type: Thickness mil LLDPE HDPE PVC Other Liner Seams: Welded Factory Other Other CFIVED Other CFIVED Closed-loop System: Subsection H of 19.15.17.11 NMAC X W x D X
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D 3. Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Drying Pad Cliner type: Thickness mil LLDPE HDPE PVC Other Liner Seams: Welded Factory Other Construction material: Steel
Liner Seams:
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Drying Pad Unlined Liner type: Thickness mil LLDPE HDPE PVC Other Liner Seams: Welded Factory Other Other CFIVED Other CFIVED Closed-loop System: Subsection H of 19.15.17.11 NMAC X W x D X
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Drying Pad Unlined Liner type: Thickness mil LLDPE HDPE PVC Other

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify	hospital,
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting OtherExpanded Metal Monthly inspections (If netting or screening is not physically feasible)	
Signs: Subsection C of 19.15.17.11 NMAC ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers ☐ Signed in compliance with 19.15.3.103 NMAC	
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the approoffice or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying above-grade tanks associated with a closed-loop system.	priate district pproval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☑ No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No ☑ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No ☑ NA
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☑ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes 🛭 No
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☑ No
Within a 100-year floodplain FEMA map	☐ Yes ☑ No

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC Previously Approved Design (attach copy of design) API Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number: (Applies only to closed-loop system that use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
13.
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.1 Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if facilities are required.							
Disposal Facility Name: Disposal Facility Permit Number:							
Disposal Facility Name: Disposal Facility Permit Number:							
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations Yes (If yes, please provide the information below) No							
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	С						
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate dist considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justic demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.	rict office or may be						
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA						
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA						
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA						
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No						
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No						
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No						
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No						
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No						
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No						
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No						
Within a 100-year floodplain. - FEMA map	☐ Yes ☐ No						
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards canr Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	.15.17.11 NMAC						

19. Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.
Name (Print): Deborah K Powell Title: _Engineering Tech Supervisor
Signature:
e-mail address:DebbyP@McElvain.com Telephone:303-893-0933
OCD Approval: Permit Application (including closure plan) A Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Deputy Oil & Gas Inspector, Approval Date:
Title: OCD Permit Number:
21. Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.
Closure Completion Date:
12. Closure Method:
25. Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: Instructions: Please indentify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more the two facilities were utilized.
Disposal Facility Name: Disposal Facility Permit Number:
Disposal Facility Name: Disposal Facility Pennit Number:
Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations? Yes (If yes, please demonstrate compliance to the items below) \(\subseteq \text{No} \)
Required for impacted areas which will not be used for future service and operations: Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique
24. <u>Closure Report Attachment Checklist</u> : Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached.
 □ Proof of Closure Notice (surface owner and division) □ Proof of Deed Notice (required for on-site closure) □ Plot Plan (for on-site closures and temporary pits) □ Confirmation Sampling Analytical Results (if applicable) □ Waste Material Sampling Analytical Results (required for on-site closure) □ Disposal Facility Name and Permit Number □ Soil Backfilling and Cover Installation
Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation)
On-site Closure Location: Latitude Longitude NAD: 1927 1983
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print): Title:
Signature:Date;
c-mail address:

Cistrict I PD Box 1980, Hobbs, NM 88241-1980

District II PC Drawer OC, Antesia, NM 88211-0719

District III 1000 Rio Brazos Rd. Aztes, NM 87410

State of New Mexico Energy, Minerals & Natural Resources Department

Form C-102
Revised February 21, 1994
Instructions on back
Submit to Appropriate District Office
State Lease 4 Copies
Fee Lease - 3 Copies

TITE STONE

Certificate Number

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe, NM 87504-2088

			Jai	10 1 E, 1914	07304 2000)		MEND	ED BENDAT				
nta Fe.	NM 87504-	2088						AMCINU	LU HEFUH				
		WELL	LOCAT	ON AND A	CREAGE DED	TCAT	ION PLA	T					
Number		. ['Pool Coo	te l			Pool Name	-					
-3	3/6/	·											
de	*Property Name Well Number												
<u> </u>													
l			McELVA			IES			5498				
Section .	Township	Range	Lot Idn	Feet from the	North/South line	Feet	from the	East/Mest line	County				
3	29N	13W		1755	SOUTH		860	WEST	SAN JUAN				
Pant	11 🖯								County				
3611101	TOWN EST ID	nanya	LOC 101	reet from the	NO OF SOUCH THE	""	t from the	East/West Time	Country				
	_		<u> </u>	Joint or Infill	M Consolidation Code	E Order	· No		1				
160	.0 Acres	s - SW,	/4										
BLE W									NSOL IDATED				
	UH A			UNII HAS BI	EN APPRUVEU	BY I			TOTOATION				
	ļ	5	2B0 .00 °			_	I hereby	certify that the	information				
	1	ΩT		LOT	LOT	92	contained to the be	herein is true a st of my knowledg	nd complete ge and belief				
	-			2	1	27	1/2	la PP	Well				
	 				1	(1)	☐ Signature		<i>σα ε. γ.</i> σ				
									er				
					!			-					
	ļ				}	0	Title						
	1				ŀ		l ———	27, 2005					
						132		יעסט פרטד	TETCATION				
	1				i I		I heneby co	entify that the w	ell location				
	-		₌ 3				I notes of a	ctual surveys mad	e by me or under				
	1		11						_				
			I					and Seal of Profe	ssignal Sucveyor				
			 					ON C. EDA					
						_	/	JAS W MEX	12 N				
	1		ı		I	\simeq	1 /	7/80 ~~ 10	, , ~ ,				
	LE	ASE			 	 640 0	(FE	14/ /	(a)				
	Number 2 3 de 1 3 Section 3 Section 160	Number 3 26 kg Section Township 3 29N 11 E Section Township 160.0 Acres OR A	Number -33/6/ de 3 29N 13W 11 Bottom Section Township Range 160.0 Acres - SW BLE WILL BE ASSIGNE OR A NON-S	WELL LOCATION Number Pool Coc 77200 de MCELVA Section Township Range Lot Idn 3 29N 13W 11 Bottom Hole L Section Township Range Lot Idn 160.0 Acres - SW/4 BLE WILL BE ASSIGNED TO TH OR A NON-STANDARD 5280.00	WELL LOCATION AND AND AND AND AND AND AND AND AND AN	WELL LOCATION AND ACREAGE DED Number	WELL LOCATION AND ACREAGE DEDICAT Number 19001 Code 77200 FULCHER KU Oberator Name RUBY Operator Name MCELVAIN OIL & GAS PROPERTIES OSURface Location South 13W 1755 SOUTH South 176 Oberator South 176 Feet Iron the Nerth/South 176 Feet Oberator Name North/South 176 Feet Oberator North/South 17	WELL LOCATION AND ACREAGE DEDICATION PLA Number	WELL LOCATION AND ACREAGE DEDICATION PLAT Number				

5270.76

New Mexico Office of the State Engineer POD Reports and Downloads

Township:	29N Range: 13W Section	ons: 2,3,4,10	
NAD27 X:	Y: Zon	e: Search Radio	as:
County:	Basin: SJ(San Juan)	Number:	Suffix:
Owner Name: (First)	(Last)	Non-Domesti	c ①Domestic ②All
POD / Surface Data	Report Avg Depth	to Water Report	ter Column Report
	Clear Form (**)	ERS Menu Help	

WATER COLUMN REPORT 08/22/2008

(qu	arter	s are	e 1=1	W	2=	=NE	3=SW 4=SE)						
(qu	arter	s are	e big	gge	est	to:	smallest)			Depth	Depth	Water	(in
POD Number	Tws	Rng	Sec	đ	q	đ	Zone	X	Y	Well	Water	Column	
SJ 03272	29N	13W	02	1	3	3				140	35	105	
SJ 03273	29N	13W	02	3		1				120	20	100	
SJ 03288	29N	13W	02	3	4	1				120	90	30	
SJ 02412	29N	13W	02	4	2					48	28	20	
SJ 02750	29N	13W	02	4	2	4				59	18	41	
SJ 02751	29N	13W	02	4	. 2	4				58	17	41	
SJ 02281	29N	13W	02	4	3	4				59	30	29	
SJ_02328	29N	13W	04	3	3					40	10	30	
SJ 02899	29N	13W	04	3	3	3				45			
SJ 02912	29N	13W	04	3	3	3				50			
SJ 02730	29N	13W	04	3	3	3				40	16	24	
SJ 02052	29N	13W	10							68	22	46	
SJ 00775	29N	13W	10	2	1	4				36	14	22	
SJ 01271	29N	13W	10	2	2	4				60	30	30	
SJ 03404	29N	13W	10	2	3	4				42	22	20	
SJ 01317	29N	13W	10	2	4	2				50	23	27	
SJ_00314 X	29N	13W	10	2	4	2				58	38	20	
SJ 00852	29N	13W	10	2	4	2				50	24	` 26	
SJ 01402	29N	13W	10	3	2					25	15	10	
SJ 03311	29N	13W	10	3		1				42	20	22	
SJ 03314	29N	13W		3	2	3				32	18	14	
SJ 02935	29N	13W		3	2	4				100	10	90	
SJ 03578	29N	13W		3	3	1				240	23	217	
SJ 03297	29N	13W	10	3	3	2				29	9	20	
SJ_00720	29N	13W		3	3	3				29	15	14	
SJ 03332	29N	13W	10	4	2	3				60			
SJ 00776	29N	13W	10	4	4					25	10	15	

Record Count: 27


New Mexico Office of the State Engineer POD Reports and Downloads


Town	ship: 30	N Range:	13W	Sections	: 33,3	4,35	•	•		
NAD27	X:	Y:		Zone:	,	Sear Sear	ch Radius	::		
County:	B	Basin:			W.	Number:		Suffix:		ŧ
Owner Name: (First	st)	,	(Last)			O Non-	Domestic	O Dome	estic 💿	All
POD / Surfac	e Data Re	port	Avg	Depth∗tő V	Vater, l	Report	Wate	r Column	Report	
		Clear Fo	orm [₩ATER	S Mer	Help				
	**************************************		general and a second					ili i ku ali akili izi kizi i se i liki in se anini kulabaki i sh i se nta cak		***************************************
			WATER	COLUMN I	REPOR	T 08/29/2	008			
(0	quarter	s are 1=NW	2=NE :	3=SW 4=SI	E)					
	_	are bigge					Depth	Depth	Water	(in
POD Number SJ 02391	Tws 30N	Rng Sec q 13W 35 1	q q 1 1	Zone	х	, Y	Well 260	Water 200	Column 60	

Record Count: 1


San Juan Mines, Mills And Quarries Web Map

Mines, Mills & Quarries Commodity Groups									
Δ	Aggregate & Stone Mines								
•	Coal Mines								
*	Industrial Minerals Mines								
•	Industrial Minerals Mills								
	Metal Mines and Mill Concentrate								
	Potash Mines & Refineries								
1	Smelters & Refinery Ops.								
*	Hranium Minas								

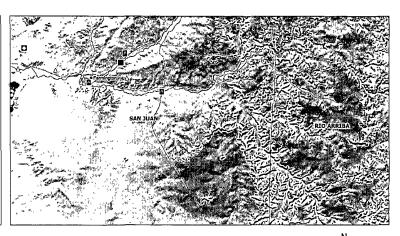






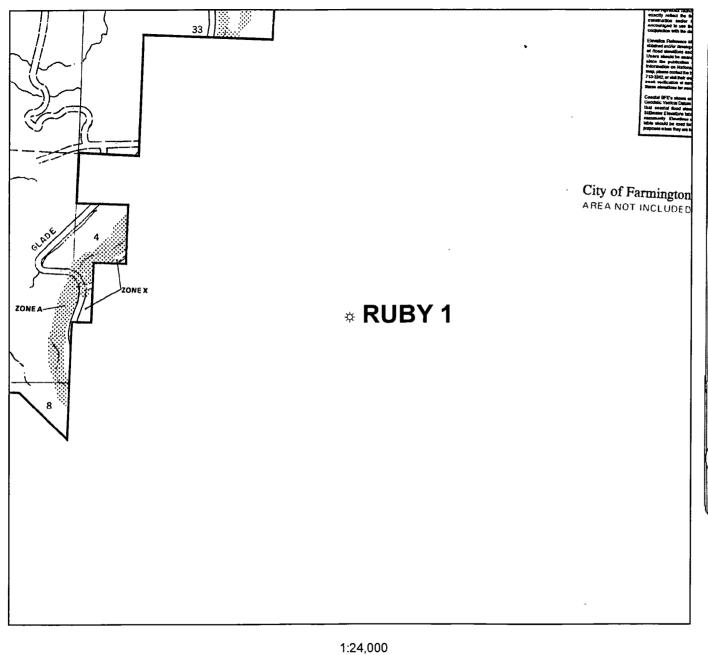

NATIONAL FLOOD INSURANCE PROGRAM FIRM FLOOD INSURANCE RATE MAP SAN JUAN COUNTY, **NEW MEXICO** (UNINCORPORATED AREAS) PANEL 505 OF 1450 (SEE MAP INDEX FOR PANELS NOT PRINTED) COMMUNITY-PANEL NUMBER 3500640505 C MAP REVISED: MAY 15, 2002

Federal Emergency Management Agency

0 1,200 2,400 4,800 7,200 9,600

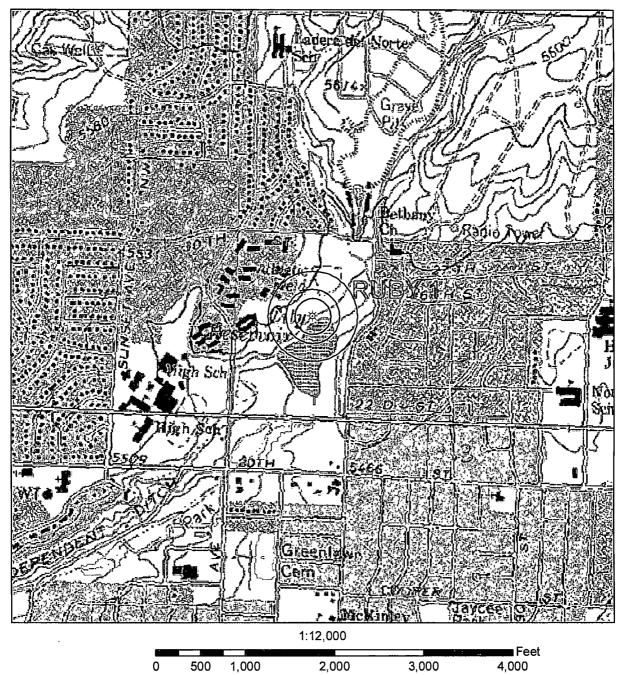


Legend

McElvain Well & 200' Radius

McElvain Well & 300' Radius

McElvain Well & 500' Radius

Source: USGS 1:24,000 Scale Topographic Map Series San Juan Basin New Mexico Township 29N 13W Section 3

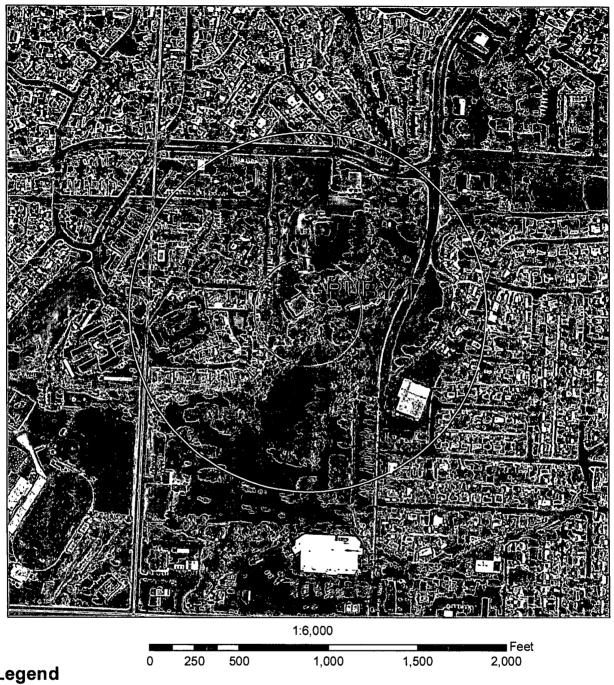


Legend

McElvain Well & 300' Radius

McElvain Well & 1000' Radius

Aerial Source: NM Resource Geographic Information System Program made available by the Univeristy of New Mexico and the State of New Mexico 2005-2006 vintage Digital Orthophoto Quarter-Quadrangles were derived from the New Mexico Statewide Orthophotography Project. Source imagery flown at 35,000' above average ground.

San Juan Basin **New Mexico** Township 29N 13W Section 3

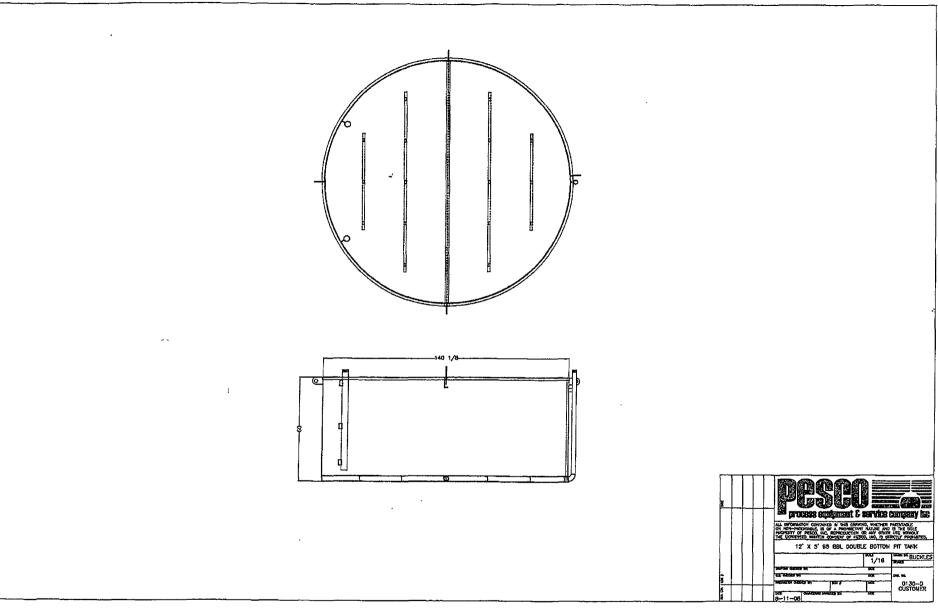

Ruby #1
... 2 Tanks
... Same 5/2E

Siting Criteria Compliance Demonstrations

Ruby #1 well is not located in an unstable area. The location is not over a mine and is not on the side of a hill. The location of the excavated pit material is not located within 300' of any continuously flowing watercourse or 200' from any other water course.

McElvain Oil & Gas Properties, Inc. San Juan Basin Below Grade Tank Design and Construction

In accordance with Rule 19.15.17 NMAC the following describes the as-built construction of the Below Grade Tank on the McElvain Oil & Gas Properties, Inc (MOG) Ruby #1 well located in the NWSW of Sec 3, T29N, 13W.

As-built Installation:

- 1. The existing tank pit consists of an approximate 30 foot by 15 foot metal shored hole into which 2, 12 foot by 5 foot single walled, closed top, steel, 95 bbl tanks are placed.
- 2. The tank walls are open for visual inspection to identify the occurrence of leaks.
- 3. There is an expanded metal covering on the top of the below grade tank.
- 4. The tank pit is surrounded by a 30ft X 30ft X 2ft berm that is contained within a 50 ft X 140 ft berm that encloses the tank battery to prevent overflow or surface water run-on.
- 5. A general location sign is displayed on site.
- 6. The pit tank is fenced with 6 foot chain linked fence.

McElvain Oil & Gas Properties, Inc. San Juan Basin Below Grade Tank Maintenance and Operating Plan

In accordance with Rule 19.15.17 NMAC the following describes the below grade tank operation and maintenance plan for the McElvain Oil & Gas Properties, Inc (MOG) on the Ruby #1 well located in the NWSW of Sec 3, T29N, 13W.

General Plan:

- 1. MOG shall operate and maintain the below grade tank to contain liquids and solids and prevent contamination of fresh water to protect the public health and environment.
- 2. MOG shall not allow a below grade tank to overflow or allow surface water run-on to enter the below grade tank.
- 3. MOG shall continuously remove any visible or measurable layer of oil from the fluid surface of a below grade tank in an effort to prevent significant accumulation of oil over time.
- 4. MOG shall inspect the below grade tank monthly and maintain a written record of each inspection for five years.
- 5. MOG shall maintain adequate freeboard to prevent overtopping of the below grade tank.

McElvain Oil & Gas Properties, Inc. San Juan Basin Closure Plan

In accordance with Rule 19.15.17.1 NMAC the following procedure describes the closure plan for the McElvain Oil & Gas Properties, Inc (MOG) below grade tank on the Ruby #1 well located in the NWSW of Sec 3, T29N, 13W.

Closure Requirements:

- 1. MOG shall close the below grade tank within the time periods provided in 19.15.17.13 NMAC or by an earlier date that the division requires because of imminent danger to fresh water, public health, or the environment.
- 2. MOG shall close an existing below grade tank that does not meet the requirements of Paragraph (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008 if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.
- 3. MOG shall close a permitted below grade tank within 60 days of cessation of the below ground tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on C-144.
- 4. All liquids will be removed from the temporary permit prior to closure and the liquids disposed of in a division approved facility.
- 5. MOG shall remove the below grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.
- 6. MOG will remove any on-site equipment associated with the below grade tank unless the equipment is required for some other purpose.
- 7. MOG shall test the soils beneath the below grade tank to determine whether a release has occurred. MOG shall collect a five point composite sample and individual grab samples from any area that is wet, discolored, or showing other evidence of a release. The samples will be analyzed for BTEX, TPH, and chlorides to demonstrate that the benzene concentration as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration as determined by EPA method 418.1 or other EPA method that the division approves does not exceed 100 mg/kg; and the chloride concentration as determined by EPA

- method 300.1 or other EPA method that the division approves does not exceed 250 mg/kg or the background concentration, whichever is greater. MOG shall notify the division of its results on form C-141.
- 8. If MOG or the division determines that a release has occurred, then MOG shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC as appropriate.
- 9. If contamination is confirmed by field sampling. MOG will follow the Guidelines For Remediation Of Leaks, Spills, and Releases NMOCD August 1993 when remediating identified contaminants.
- 10. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, then MOG shall backfill the excavation with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover; re-contour, and re-vegetate the site.
- 11. Notice of closure will be given to the Aztec Division office between 72 hours and one week of closure via email or verbally. The notification of closure will include the following:
 - · Operator's name
 - · Location by Unit Letter, Section Township, and Range.
 - · Well name and API number
- 12. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the blow grade tank. The closure report will be filed on C-144 and incorporate the following:
 - · Details on capping and covering where applicable
 - · Inspection reports
 - · Sampling results
- 13. The site will be re-contoured to match the surrounding area. Natural drainages will be unimpeded and erosion control will be utilized where necessary.
- 14. MOG shall seed the disturbed areas the first growing season with a division approved seed mixture after pit closure. Seeding will be accomplished by drilling on the contour whenever possible or by other division approved methods. Repeat seeding or planting will be continued until successful vegetative growth occurs.
- 15. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the thickness of the topsoil native to the area, whichever is greater.

16. The surface owner shall be notified of MOG's closing of the below grade tank as per the approved closure plan using certified mail with return receipt requested.

Hydrogeological Report For

Ruby #1

Surface Formation:

Kirtland Formation

Regional and Local Geology

The late Cretaceous Kirtland Formation is of Mesozoic age and represents an upper coastal or alluvial-plain deposit landward of the Fruitland coal swamp environment. The Kirtland Formation conformably overlies the Fruitland Formation, and in most of the San Juan Basin is unconformably overlain by the Tertiary Ojo Alamo. In this area, where buried, the Ojo Alamo interfingers with the Tertiary Nacimiento; therefore, both the Ojo Alamo and Nacimiento come in contact with the Kirtland Formation (Baltz, 1967). The Kirtland Formation outcrops along almost the entire inner margin of the San Juan Basin. In the north and east the formation outcrops in a thin band, but in a much wider swath to the south and west.

Fassett & Hinds (1971) divided the Kirtland into three members: the lower shale member, the Farmington Sandstone Member, and the upper shale member. The lower shale is a continental flood plain deposit consisting predominantly of shale containing a few thin interbeds of siltstone and sandstone. The Farmington and upper shale are composed of a series of interbedded, small, channel sandstone beds and flood plain shales. In this area, local conglomeratic beds and shales occur in the Farmington and upper shale. Little carbonaceous shale or coal is present in the Kirtland, distinguishing it from the underlying Fruitland Formation which was also deposited in a fluvial environment.

The Farmington Sandstone Member of the Kirtland Formation predominantly contains water but has produced gas and oil from small stratigraphic traps yielding low reserves.

Hydraulic Properties

In the northwest, west and south the Kirtland is mapped separately from the Fruitland. In the northeast and eastern regions of the San Juan Basin the Kirtland is mapped with the Fruitland in an undivided unit (Fassett and Hinds, 1971). The Kirtland and Fruitland have similar hydrologic properties. Stone et al. (1983) stated the transmissivity of the "Kirtland Shale-Fruitland Formation" to be less than 10 ft²/d with a specific conductance averaging over 5000 μ mhos (Stone et al., 1983). The Kirtland and Fruitland Formations are also important because they are the principal "aquifers" disturbed by mining of coal in the Fruitland Formation (Stone et al., 1983).

Hydrology & Conclusion

A records search of the NM Office of the State Engineer iWaters database was conducted on a 4-section area centered on the section in which lies the Ruby #1 well location, 29N 13W section 3. 30 wells with depth to water records were identified. Average depth to water in the area is 18'. The well with the greatest depth to water in the 4-section area recorded a depth to water at 50'. These water wells and the Ruby #1 are located near the Halford Independent Ditch (as it is named on topography maps) and therefore are all close to the same ground elevation. It can be concluded that the maximum depth to water found at the Ruby #1 location would be 50'.

References

Baltz, E.H., 1967, Stratigraphy and Regional Tectonic Implications of Part of Upper Cretaceous Rocks, East-Central San Juan Basin, New Mexico, USGS Professional Paper 552, 101p.

Fassett, J.E., and Hinds, J.S., 1971, Geology and Fuel Resources of the Fruitland Formation and Kirtland Shale of the San Juan Basin, New Mexico and Colorado, USGS Professional Paper 676, 76p.

Scholle, P.A., 2003, Geologic Map of New Mexico 1:500,000, NM Bureau of Geology and Mineral Resources, published in cooperation with the USGS, 2 sheets.

Stone, W.J., Lyford, F.P., Frenzel, P.F., Mizell, N.H., and Padgett, E.T., 1983, Hydrogeology and water resources of San Juan Basin, New Mexico, New Mexico Bureau of Mines and Mineral Resources, Hydrologic Report 6, 70p.

BGT Closure Sampling Required by NMOCD Components Method

Components	Method	Limit
Benzene	EPA SW-846 8021B or 8260B	0.2 mg/Kg
BTEX	EPA SW-846 8021B or 8260B	50 mg/Kg
TPH	EPA SW-846 418.1	100 mg/Kg
Chlorides	EPA 300.1	250 mg/Kg