Fo (A

RECEIVED

om 3160-5 April 2004)	D	UNITED STA EPARTMENT OF T		eary (09 20 1)	FORM APPROVED OMB No 1004-0137 Expires March 31 2007		
		UREAU OF LAND M			ļ	5 Lease Ser	ial No		
	SUNDRY	NOTICES AND	REPORTS ON	WELLSigto	n Field (ric NO-G-	9909-1359		
E a	Oo not use th	is form for proposa II. Use Form 3160-	is to drill or to	osinesenteri ani	ind Mana	∂⊘u lf∉iidia	n. Allottee or Tribe Name		
		PLICATE- Other i	nstructions on	reverse side).	7 If Unit o	or CA/Agreement. Name a	nd/or No	
Type of Well Oil Well Gas Well Other						8 Well Name and No. Clinton #1			
2. Name of Operator Coleman Oil & Gas, Inc.							9 API Well No		
Ba Address P.O. Drawer 3	337			3b Phone No (include area code) 505-327-0356			30-045-30694 10 Field and Pool, or Exploratory Area		
4 Location of We	ell (Footage, Sec , I	T, R, M., or Survey Descript	ion)				os Fruitland Sand - PC		
1800' FSL, 760' FWL L, Section 24, T26N, R12W Latitude 36.471389°, Longitude 108.069444°							11 County or Parish, State		
						San Ju	ıan, New Mexico		
	··	PROPRIATE BOX(ES	TO INDICATE N	NATURE OF N	OTICE, RI	EPORT, O	R OTHER DATA		
TYPE OF S	YPE OF SUBMISSION TYPE OF ACTION								
Notice of Ir	ntent	Acidize	Deepen Deepen		duction (Star	rt/Resume)	Water Shut-Off		
		Alter Casing Casing Repair	Fracture Tre		clamation complete		Well Integrity Other		
Subsequent	Report BV	Change Plans	Plug and Ab		nporarily Ab	andon			
Fınal Aban	donment Notice	Convert to Injection	Plug Back		iter Disposal				
Attach the E following co testing has b determined	Sond under which the ompletion of the invoceen completed. Fire that the site is ready	ctionally or recomplete horizate work will be performed or volved operations. If the operal Abandonment Notices sharfor final inspection.)	provide the Bond No ation results in a multi all be filed only after al	on file with BLM/I ple completion or re Il requirements, incl	BIA Require ecompletion in luding reclama	d subsequent n a new intervation, have be	reports shall be filed with val, a Form 3160-4 shall be sen completed. and the ope	n 30 days filed once rator has	
COLEM	AN OIL & GAS,	INC. PROPOSES TO PI	LUG AND ABANDO				TTACHED PROCEDI	JRE.	
				Notify NMOCD 24 hrs prior to beginning			RCVD MAY:		
				operations		nn cons. D			
							. DIST	, đ	
	ELL SEPTEMBI ED ROTARY TO	ER 26, 2001 OOLS SEPTEMBER 28,	2001						
14 I hereby ce	ertify that the fore inted/Typed)	going is true and correct				•			
	MICHAEL T. H	ANSON		Title OPERATI	ions engi	NEER			
Signature	Nuna	f // ans	v	Date //	lay	3,	2012	-	
		THIS SPACE F	OR FEDERAL	OR STATE	OFFICE	USE			
Approved by	Original Si	gned: Stephen Mas	on	Title			Date MAY 15	2012	
Conditions of ap		attached Approval of this r l or equitable title to those r							

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department of agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on page 2)

which would entitle the applicant to conduct operations thereon

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this

form and the number of copies to be submitted, particularly with regard to local area. or regional procedures and practices, either are shown below or will be issued by, or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements Consult the local Federal office for specific instructions.

Item 13 - Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or

present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise: depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount. size. method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole: method of closing top of well and date well site conditioned for final inspection looking to approval of the abandonment.

NOTICE

The Privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease: and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3. and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

This information is being collected to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT

Public reporting burden for this form is estimated to average 25 minutes per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer, (WO-630), Mail Stop 401 LS. 1849 C St., N.W.. Washington D C. 20240

· 17 . 31

Coleman Oil & Gas, Inc.

<u>Plug and Abandon</u> <u>Gallegos Fruitland Sand – Pictured Cliffs Formation</u>

Thursday, April 26, 2012

Well:

Clinton #1

Gallegos Fruitland Sand-PC

Location:

1800' FSL & 760' FWL (NWSW)

Elevation:

6195 RKB

ocation.

Sec 24, T26N, R12W, NMPM

6190' GL

NO-G-9909-1359

Ву:

San Juan County, New Mexico Michael T. Hanson

Lease: API#:

Field:

30-045-30694


Procedure:

(Note: This procedure will be adjusted on site based upon actual conditions)

Plug and Abandon

- 1. Load and Pressure Test VIA Braden Head Valve Production and Surface Casing Annulus to 650 psig. Record volume and pressure drop if any over a 30 minute period. If Production and Surface Casing Annulus holds pressure proceed to next step.
- 2. MIRU and POOH with rods & tubing, tag up with tubing prior to pulling. Lay down rods and tubing. Make sure perforations are not covered with sand.
- 3. Rig up cementers and bullhead cement into Gallegos Fruitland Sand (PC) perforations. Fill casing with cement. Pressure up and displace cement into PC formation.
- 4. Tag cement to check to make sure cement is above 80 Feet GL. If required top off with cement.
- 5. Cut off wellhead below Braden Head and top off with cement per regulations.
- 6. Install four inch dry hole marker as per regulations.

COLEMAN OIL GAS, INC. CLINTON #1

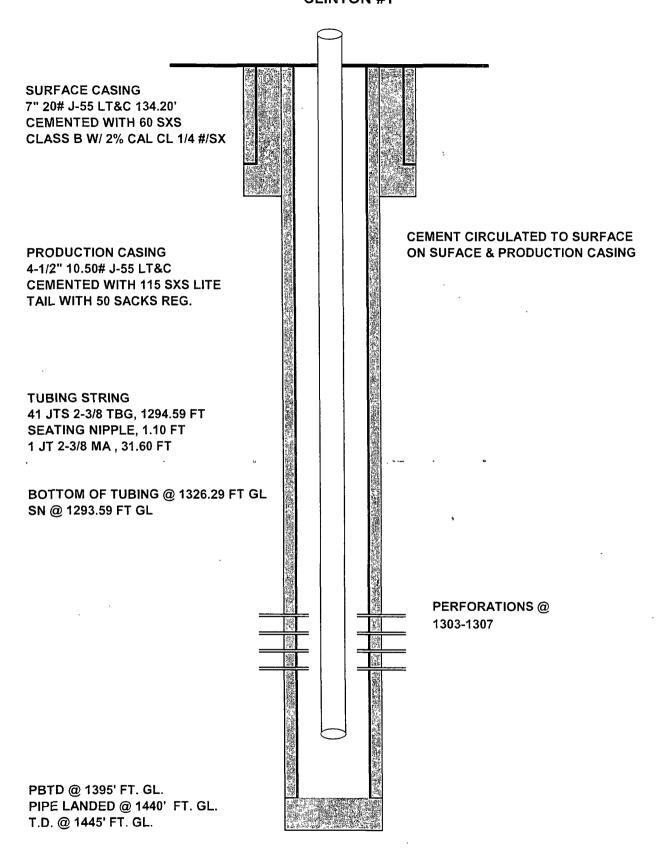

Cement circulated to surface on surface and production casing.

Schlumberger CBL-VDL GR & CL dated 09-Oct-2001 indicates good quality cement from TD to bottom of Surface Casing.

Dry Hole Marker Information:

Coleman Oil & Gas, Inc. Clinton #1 NO-G-9909-1359 API # 30-045-30694 1800' FSL 760' FWL H, Section 24, T26N, R12W San Juan, NM