

District I
1625 N French Drive, Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II
811 S First Street, Artesia, NM 88210
Phone: (505) 748-1283 Fax: (505) 748-6170

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S St Francis Drive, Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102
Revised August 1, 2011

Submit one copy to
Appropriate District Office

OIL CONSERVATION DIVISION
1220 South St. Francis Drive
Santa Fe, NM 87505

☐ AMENDED REPORT

AS-Drilled
RCVD APR 11 '12

WELL LOCATION AND ACREAGE DEDICATION PLAT OIL CONS. DIV.

*API Number 30.045-35315		*Pool Code 5860	*Pool Name SOUTH BISTI - GALLUP (O)
*Property Code 38869	*Property Name GOOD TIMES P32-2410		*Well Number 01H
*GRID No. 282327	*Operator Name ENCANA OIL & GAS (USA) INC.		*Elevation 6615'

10 Surface Location


UL or lot no	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	32	24N	10W		990	SOUTH	330	EAST	SAN JUAN

11 Bottom Hole Location If Different From Surface

UL or lot no	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	32	24N	10W		991	SOUTH	379	WEST	SAN JUAN

12 Dedicated Acres 320.0 Acres - (S/2)	13 Joint or Infill	14 Consolidation Code	15 Order No
---	--------------------	-----------------------	-------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

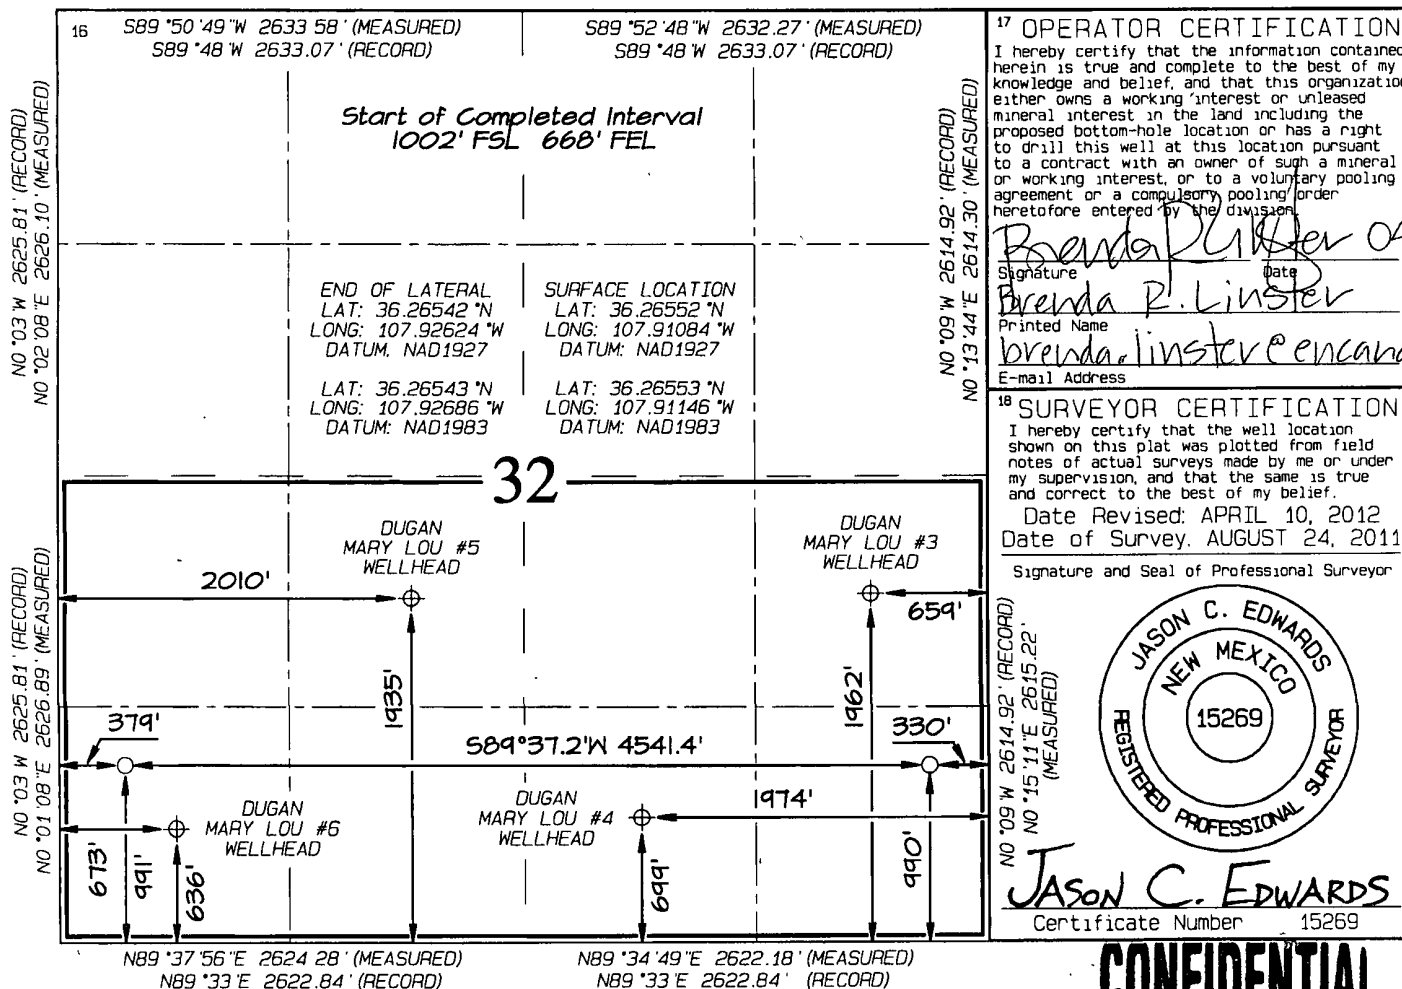

CONFIDENTIAL


DEVIATION SURVEYS

MD (feet)	Inclination (degree)
256	0.75
440	0.90
708	1.10
809	1.00
965	0.5
1215	0.3
1500	0.2
1711	0.3
1965	0.4
2215	0.3
2500	0.6
3500	0.3
3750	0.1

RCVD APR 4 '12
OIL CONS. DIV.
DIST. 3

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

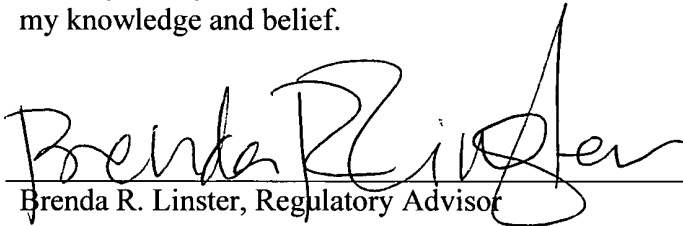
Brenda R. Linster, Regulatory Advisor


03-30-12

ACKNOWLEDGMENT


State of Colorado
City and County of Denver

This instrument was acknowledged before me on this 30th day of March, 2012 by Brenda R. Linster as Attorney in Fact of Encana Oil & Gas (USA) Inc., on behalf of said corporation.

In witness whereof, I hereunto set my hand and official seal.


Notary Public: 

My Commission Expires: June 26, 2012






Project: San Juan Co, NM
Site: S32-T24N-R10W
Well: Good Times P32-2410 01H
Wellbore: HZ
Design: Final Survey

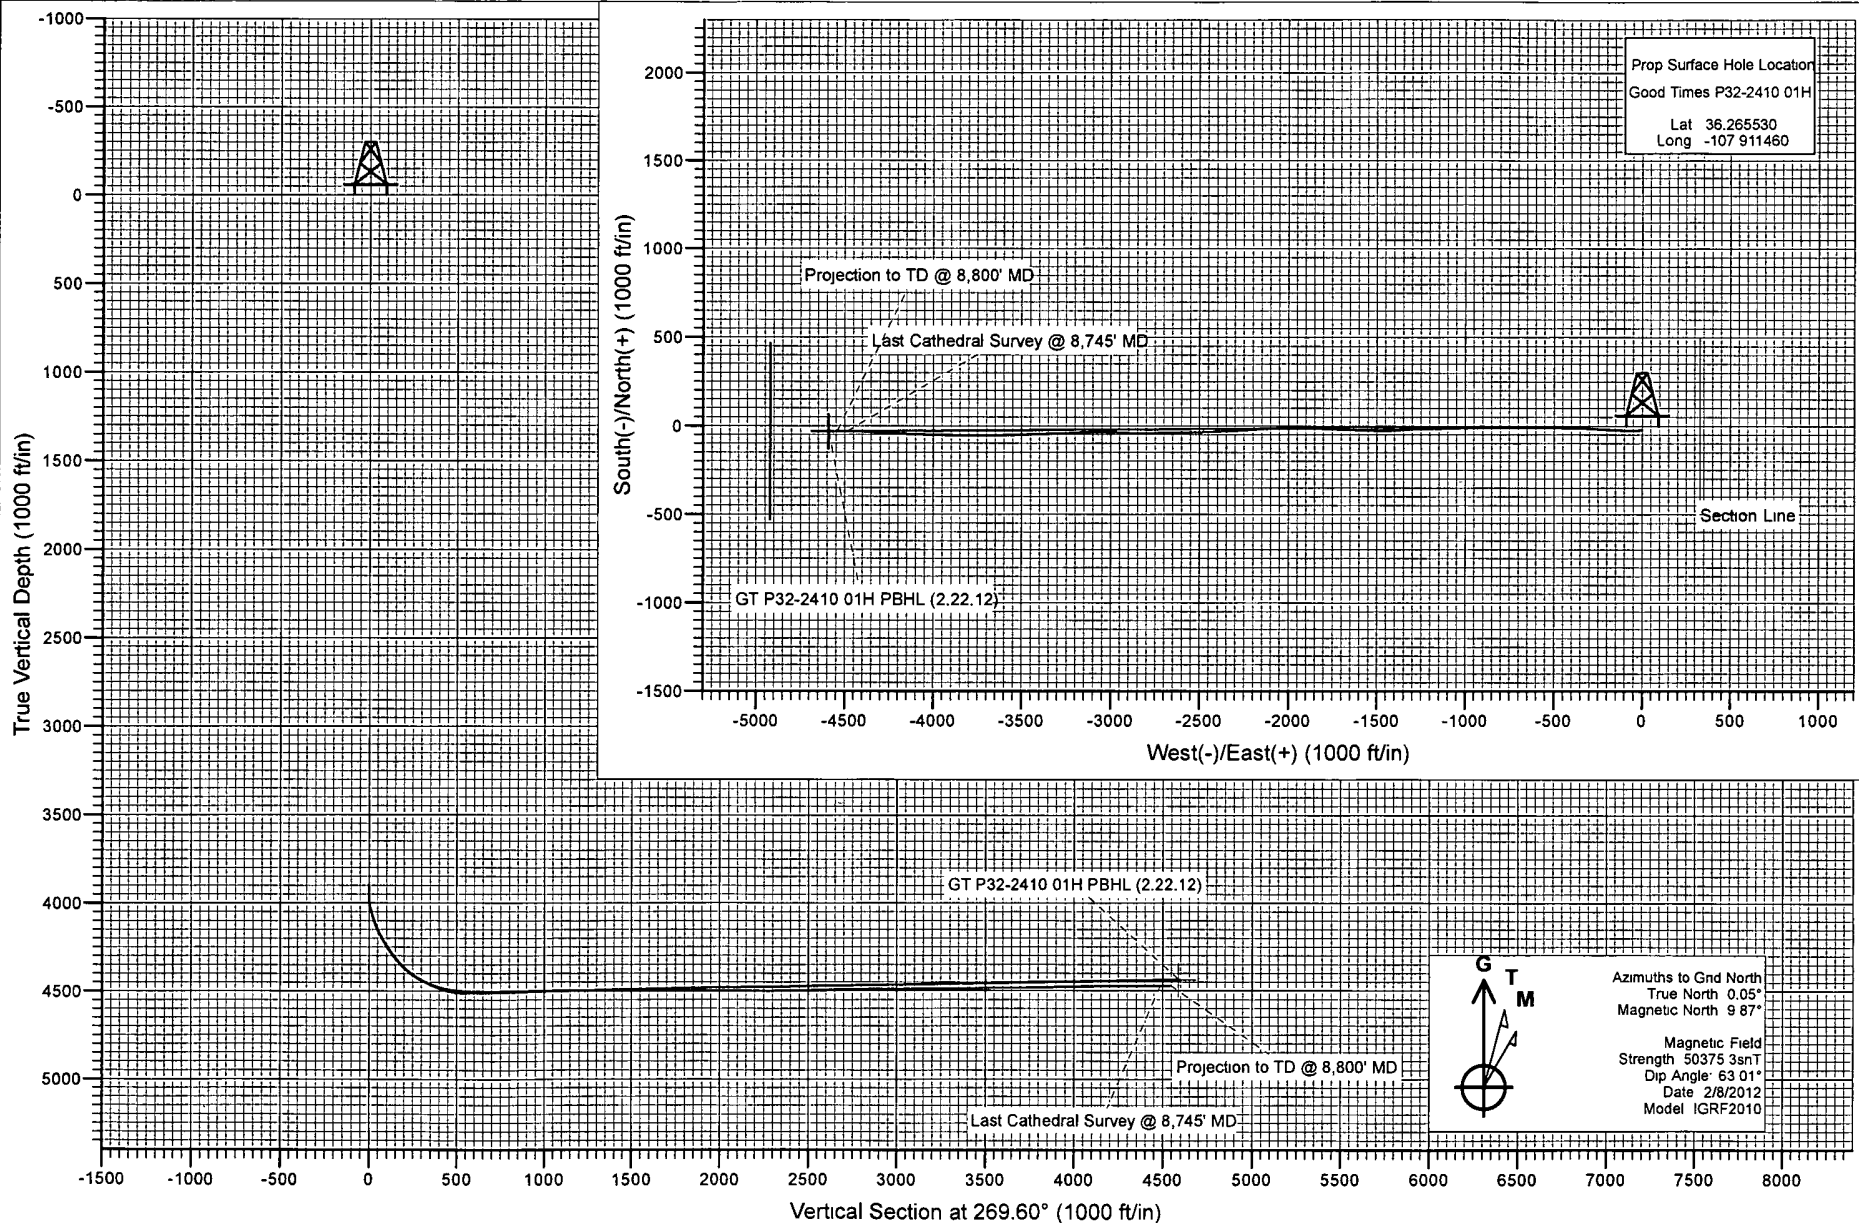



Project: San Juan Co, NM
Site: S32-T24N-R10W
Well: Good Times P32-2410 01H
Wellbore: HZ
Design: Final Survey

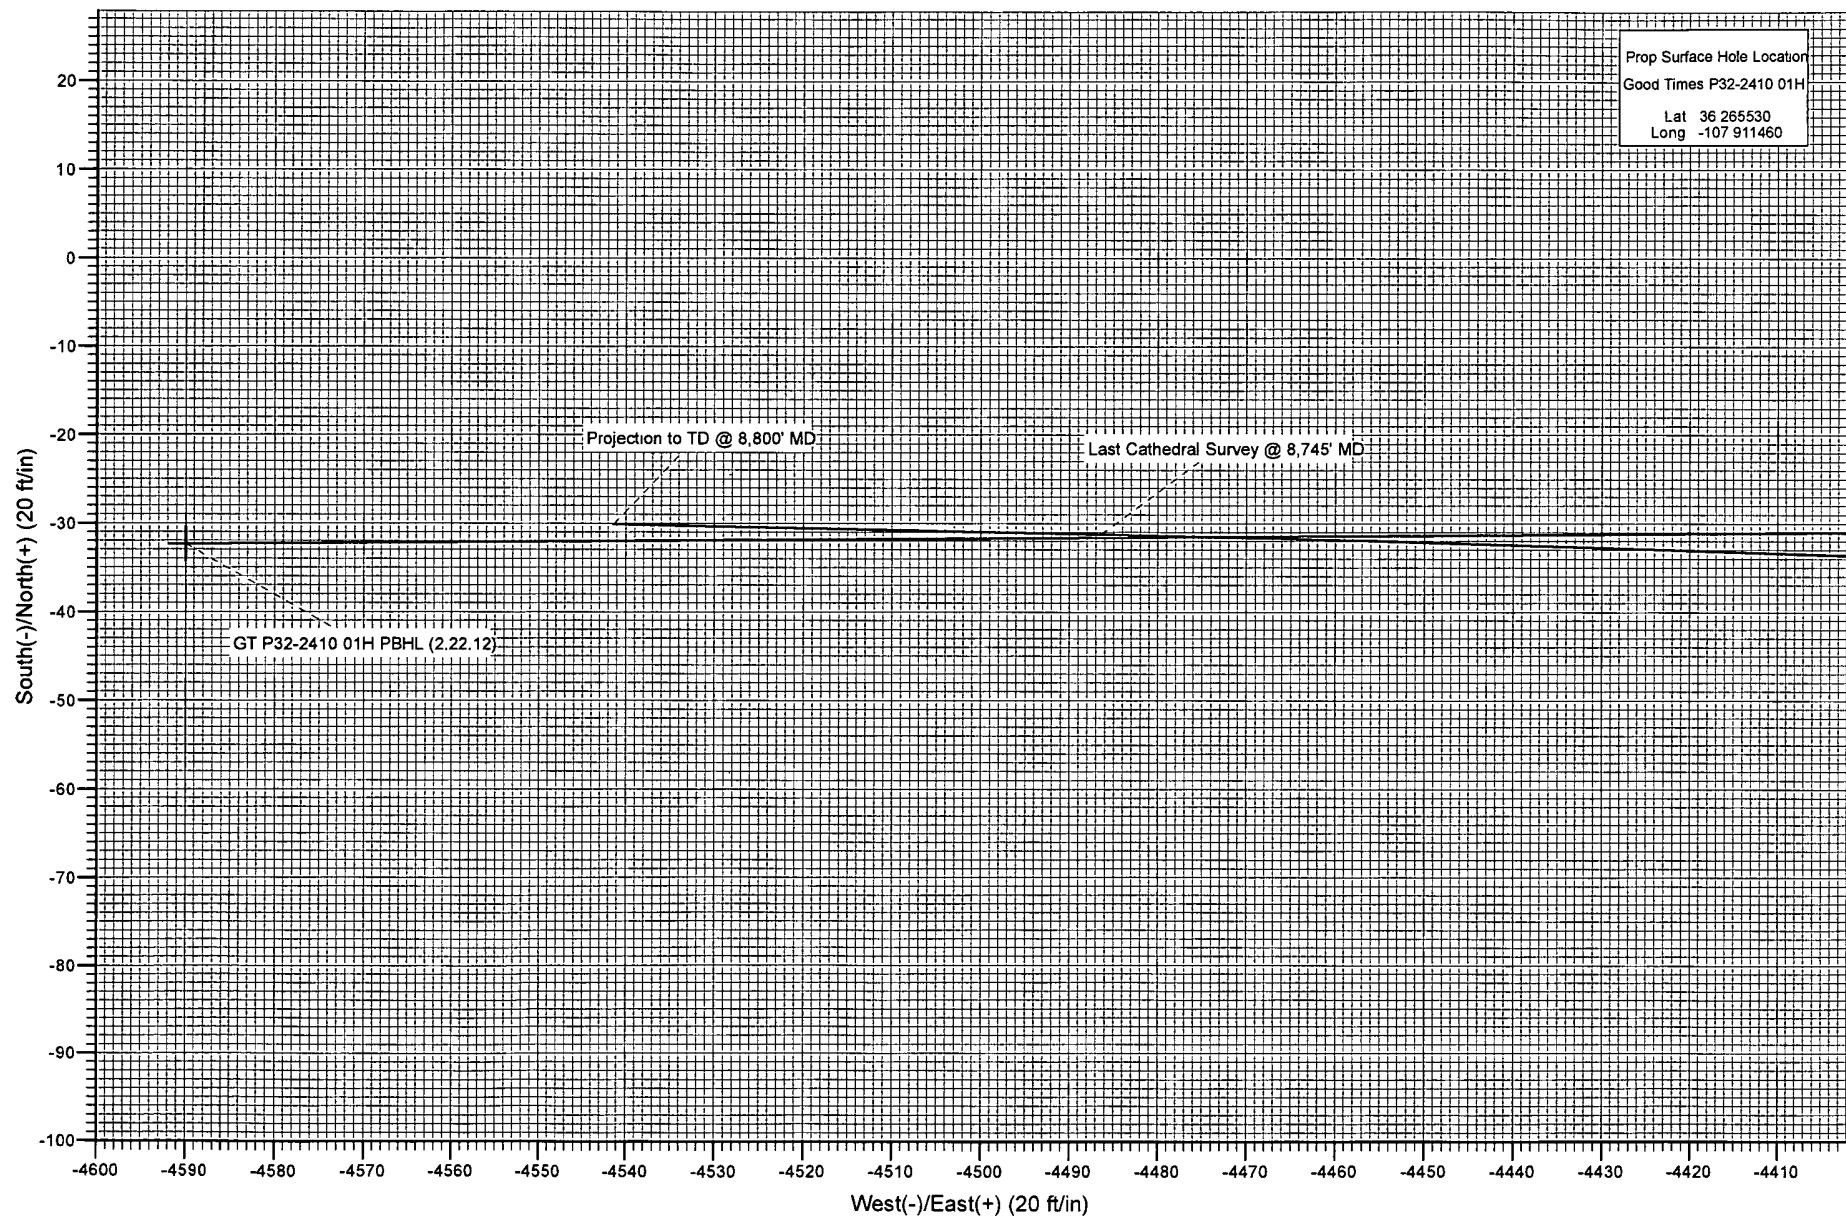

Survey Report

Company:	EnCana Oil & Gas (USA) Inc	Local Co-ordinate Reference:	Well Good Times P32-2410 01H
Project:	San Juan Co, NM	TVD Reference:	14' KB @ 6629.0ft (Original Well Elev)
Site:	S32-T24N-R10W	MD Reference:	14' KB @ 6629.0ft (Original Well Elev)
Well:	Good Times P32-2410 01H	North Reference:	Grid
Wellbore:	HZ	Survey Calculation Method:	Minimum Curvature
Design:	HZ	Database:	USA EDM 5000 Multi Users DB

Project	San Juan Co, NM		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Western Zone		

Site		S32-T24N-R10W			
Site Position:		Northing:	1,915,964 92 ft	Latitude:	36 265530
From:	Lat/Long	Easting:	2,700,065 90 ft	Longitude:	-107 911460
Position Uncertainty:	0 0 ft	Slot Radius:	13 200 in	Grid Convergence:	-0 05 °

Well							Good Times P32-2410 01H						
Well Position		+N/-S		0 0 ft		Northing:		1,915,964 92 ft		Latitude:		36.265530	
		+E/-W		0.0 ft		Easting:		2,700,065 90 ft		Longitude:		-107 911460	
Position Uncertainty				0 0 ft		Wellhead Elevation:		ft		Ground Level:		6,615.0 ft	

Wellbore	HZ				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	2/8/2012	9.82	63 01	50,375

Design	HZ			
Audit Notes:				
Version:	1 0	Phase:	ACTUAL	Tie On Depth: 0.0
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0 0	0.0	0 0	269 60

Survey Program		Date	2/28/2012		
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description	
3,898 0	8,800 0	Survey #1 (HZ)	MWD	Geolink MWD	

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Formations / Comments
3,898 0	0.60	179 80	3,897 0	-20.4	0 1	0 1	0.00	0 00	
3,941 0	0 10	99.90	3,940.0	-20 6	0 1	0 0	1 37	-1.16	
3,973.0	3 80	255.30	3,972.0	-20 9	-0 9	1 0	12 16	11.56	
4,004.0	8.90	260 10	4,002 8	-21 6	-4 2	4 4	16 53	16 45	
4,035.0	13.50	261 40	4,033 2	-22.5	-10.2	10 4	14 86	14 84	
4,067 0	16 60	262 10	4,064 1	-23.7	-18 4	18 6	9.70	9 69	
4,099 0	19 10	265.10	4,094.5	-24 8	-28 2	28.3	8 32	7.81	
4,129.0	21 30	265.10	4,122.7	-25 7	-38 5	38.7	7 33	7.33	
4,161.0	24.40	265.60	4,152.2	-26.7	-50.9	51.1	9 71	9 69	
4,193.0	27.70	271 00	4,180 9	-27 1	-64.9	65.1	12 69	10 31	
4,224 0	29.80	274.00	4,208 1	-26 4	-79 8	80 0	8.22	6 77	
4,256 0	32.20	272 60	4,235 5	-25.5	-96 2	96 4	7.83	7 50	
4,288 0	35 20	275 10	4,262 1	-24 3	-113 9	114.1	10.33	9 37	

Survey Report

Company:	EnCana Oil & Gas (USA) Inc	Local Co-ordinate Reference:	Well Good Times P32-2410 01H
Project:	San Juan Co, NM	TVD Reference:	14' KB @ 6629.0ft (Original Well Elev)
Site:	S32-T24N-R10W	MD Reference:	14' KB @ 6629.0ft (Original Well Elev)
Well:	Good Times P32-2410 01H	North Reference:	Grid
Wellbore:	HZ	Survey Calculation Method:	Minimum Curvature
Design:	HZ	Database:	USA EDM 5000 Multi Users DB

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Formations / Comments
4,319.0	37.00	271.50	4,287.2	-23.2	-132.2	132.3	8.97	5.81	
4,350.0	39.20	271.20	4,311.6	-22.8	-151.3	151.5	7.12	7.10	
4,382.0	41.80	272.10	4,335.9	-22.2	-172.1	172.2	8.33	8.12	
4,414.0	45.20	272.80	4,359.1	-21.2	-194.1	194.2	10.73	10.62	
4,445.0	49.10	273.30	4,380.2	-20.0	-216.8	216.9	12.64	12.58	
4,476.0	53.50	274.80	4,399.6	-18.3	-240.9	241.0	14.69	14.19	
4,508.0	57.80	275.30	4,417.6	-16.0	-267.2	267.3	13.50	13.44	
4,540.0	62.10	273.00	4,433.7	-14.0	-294.8	294.9	14.81	13.44	
4,572.0	65.10	272.10	4,447.9	-12.7	-323.4	323.5	9.71	9.37	
4,604.0	68.20	270.50	4,460.6	-12.0	-352.8	352.9	10.72	9.69	
4,635.0	71.90	271.30	4,471.1	-11.6	-381.9	382.0	12.18	11.94	
4,667.0	75.10	271.30	4,480.2	-10.9	-412.6	412.7	10.00	10.00	
4,699.0	78.50	271.20	4,487.5	-10.2	-443.8	443.8	10.63	10.62	
4,730.0	81.30	271.70	4,493.0	-9.4	-474.3	474.3	9.17	9.03	
4,762.0	84.30	269.90	4,497.0	-9.0	-506.0	506.1	10.91	9.37	
4,792.0	86.70	271.00	4,499.3	-8.8	-535.9	536.0	8.80	8.00	
4,824.0	87.80	270.30	4,500.9	-8.4	-567.9	567.9	4.07	3.44	
4,855.0	88.70	270.00	4,501.8	-8.3	-598.9	598.9	3.06	2.90	
4,887.0	89.60	270.20	4,502.3	-8.3	-630.8	630.9	2.88	2.81	
4,918.0	90.10	270.10	4,502.4	-8.2	-661.8	661.9	1.64	1.61	
4,950.0	90.70	270.40	4,502.2	-8.0	-693.8	693.9	2.10	1.87	
5,012.0	91.10	269.20	4,501.2	-8.3	-755.8	755.9	2.04	0.65	
5,075.0	90.40	268.40	4,500.4	-9.6	-818.8	818.9	1.69	-1.11	
5,138.0	91.20	269.90	4,499.5	-10.5	-881.8	881.9	2.70	1.27	
5,201.0	91.60	269.60	4,497.9	-10.8	-944.8	944.8	0.79	0.63	
5,264.0	90.00	269.30	4,497.1	-11.4	-1,007.8	1,007.8	2.58	-2.54	
5,327.0	89.30	269.20	4,497.4	-12.2	-1,070.8	1,070.8	1.12	-1.11	
5,390.0	90.40	268.70	4,497.6	-13.4	-1,133.8	1,133.8	1.92	1.75	
5,454.0	91.30	268.20	4,496.7	-15.1	-1,197.7	1,197.8	1.61	1.41	
5,516.0	90.80	268.20	4,495.5	-17.0	-1,259.7	1,259.8	0.81	-0.81	
5,580.0	88.50	266.60	4,495.9	-19.9	-1,323.6	1,323.7	4.38	-3.59	
5,642.0	88.90	266.80	4,497.3	-23.5	-1,385.5	1,385.6	0.72	0.65	
5,704.0	89.80	268.40	4,498.0	-26.1	-1,447.4	1,447.6	2.96	1.45	
5,767.0	89.80	270.70	4,498.2	-26.6	-1,510.4	1,510.6	3.65	0.00	
5,830.0	89.40	272.00	4,498.7	-25.1	-1,573.4	1,573.5	2.16	-0.63	
5,893.0	90.30	272.30	4,498.8	-22.8	-1,636.4	1,636.5	1.51	1.43	
5,956.0	90.80	272.40	4,498.2	-20.2	-1,699.3	1,699.4	0.81	0.79	
6,018.0	89.20	272.30	4,498.2	-17.6	-1,761.2	1,761.3	2.59	-2.58	
6,081.0	89.40	271.90	4,499.0	-15.3	-1,824.2	1,824.3	0.71	0.32	
6,145.0	89.80	271.80	4,499.5	-13.3	-1,888.2	1,888.2	0.64	0.62	
6,207.0	90.40	270.00	4,499.4	-12.3	-1,950.2	1,950.2	3.06	0.97	
6,270.0	90.20	269.20	4,499.0	-12.7	-2,013.1	2,013.2	1.31	-0.32	
6,334.0	90.10	268.10	4,498.9	-14.2	-2,077.1	2,077.2	1.73	-0.16	
6,397.0	90.20	266.70	4,498.7	-17.1	-2,140.1	2,140.1	2.23	0.16	
6,460.0	90.10	265.60	4,498.5	-21.3	-2,202.9	2,203.0	1.75	-0.16	
6,524.0	90.50	266.20	4,498.2	-25.9	-2,266.8	2,266.9	1.13	0.62	
6,587.0	89.80	267.10	4,498.0	-29.6	-2,329.6	2,329.8	1.81	-1.11	
6,650.0	91.10	267.60	4,497.5	-32.5	-2,392.6	2,392.7	2.21	2.06	
6,714.0	91.30	268.70	4,496.2	-34.6	-2,456.5	2,456.7	1.75	0.31	
6,777.0	90.70	268.80	4,495.1	-35.9	-2,519.5	2,519.7	0.97	-0.95	
6,840.0	91.60	269.20	4,493.8	-37.0	-2,582.5	2,582.7	1.56	1.43	
6,903.0	92.10	269.10	4,491.8	-38.0	-2,645.4	2,645.6	0.81	0.79	
6,966.0	91.30	268.80	4,489.9	-39.1	-2,708.4	2,708.6	1.36	-1.27	

Survey Report

Company:	EnCana Oil & Gas (USA) Inc	Local Co-ordinate Reference:	Well Good Times P32-2410 01H
Project:	San Juan Co, NM	TVD Reference:	14' KB @ 6629.0ft (Original Well Elev)
Site:	S32-T24N-R10W	MD Reference:	14' KB @ 6629.0ft (Original Well Elev)
Well:	Good Times P32-2410 01H	North Reference:	Grid
Wellbore:	HZ	Survey Calculation Method:	Minimum Curvature
Design:	HZ	Database:	USA EDM 5000 Multi Users DB

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Formations / Comments
7,029.0	89.90	270.30	4,489.3	-39.6	-2,771.4	2,771.6	3.26	-2.22	
7,092.0	89.70	269.60	4,489.5	-39.7	-2,834.4	2,834.6	1.16	-0.32	
7,155.0	90.30	271.30	4,489.5	-39.2	-2,897.4	2,897.6	2.86	0.95	
7,218.0	90.80	271.30	4,488.9	-37.7	-2,960.4	2,960.6	0.79	0.79	
7,281.0	90.00	270.60	4,488.4	-36.7	-3,023.4	3,023.5	1.69	-1.27	
7,344.0	90.20	270.10	4,488.3	-36.3	-3,086.4	3,086.5	0.85	0.32	
7,408.0	90.40	268.50	4,488.0	-37.1	-3,150.3	3,150.5	2.52	0.31	
7,472.0	90.30	267.80	4,487.6	-39.2	-3,214.3	3,214.5	1.10	-0.16	
7,533.0	90.90	267.80	4,487.0	-41.5	-3,275.3	3,275.5	0.98	0.98	
7,595.0	90.00	267.10	4,486.5	-44.3	-3,337.2	3,337.4	1.84	-1.45	
7,658.0	90.50	267.80	4,486.2	-47.1	-3,400.1	3,400.4	1.37	0.79	
7,721.0	90.70	268.80	4,485.5	-48.9	-3,463.1	3,463.4	1.62	0.32	
7,783.0	91.10	268.00	4,484.6	-50.7	-3,525.1	3,525.3	1.44	0.65	
7,845.0	90.90	268.30	4,483.5	-52.7	-3,587.0	3,587.3	0.58	-0.32	
7,907.0	90.70	267.90	4,482.6	-54.7	-3,649.0	3,649.3	0.72	-0.32	
7,969.0	90.30	269.50	4,482.1	-56.1	-3,711.0	3,711.3	2.66	-0.65	
8,032.0	90.90	271.20	4,481.4	-55.7	-3,774.0	3,774.3	2.86	0.95	
8,094.0	91.10	271.30	4,480.3	-54.4	-3,835.9	3,836.2	0.36	0.32	
8,156.0	90.80	271.20	4,479.3	-53.0	-3,897.9	3,898.2	0.51	-0.48	
8,219.0	91.90	271.10	4,477.8	-51.8	-3,960.9	3,961.1	1.75	1.75	
8,280.0	91.90	271.40	4,475.8	-50.4	-4,021.8	4,022.1	0.49	0.00	
8,342.0	91.60	271.50	4,473.9	-48.9	-4,083.8	4,084.0	0.51	-0.48	
8,404.0	91.40	273.50	4,472.3	-46.2	-4,145.7	4,145.9	3.24	-0.32	
8,465.0	89.60	272.80	4,471.8	-42.8	-4,206.6	4,206.8	3.17	-2.95	
8,527.0	90.30	273.10	4,471.8	-39.6	-4,268.5	4,268.7	1.23	1.13	
8,590.0	90.20	272.70	4,471.5	-36.4	-4,331.4	4,331.6	0.65	-0.16	
8,652.0	90.40	272.10	4,471.2	-33.8	-4,393.4	4,393.5	1.02	0.32	
8,715.0	90.40	271.40	4,470.8	-31.9	-4,456.4	4,456.5	1.11	0.00	
8,745.0	90.20	271.20	4,470.6	-31.2	-4,486.3	4,486.5	0.94	-0.67	Last Cathedral Survey @ 8,745' MD
8,800.0	90.20	271.20	4,470.4	-30.1	-4,541.3	4,541.4	0.00	0.00	Projection to TD @ 8,800' MD - GT P32-2410 01H

Targets									
Target Name	- hit/miss target	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (ft)	Easting (ft)	Latitude Longitude
GT P32-2410 01H PBHL		0.00	0.00	4,436.9	-32.3	-4,590.0	1,915,932.58	2,695,475.93	36.265430 -107.927030
- actual wellpath misses target center by 59.1ft at 8800.0ft MD (4470.4 TVD, -30.1 N, -4541.3 E)									
- Polygon									
Point 1				4,436.9	500.0	-330.0	1,916,432.58	2,695,145.93	
Point 2				4,436.9	-500.0	-330.0	1,915,432.58	2,695,145.93	

Design Annotations					
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates			
		+N/-S (ft)	+E/-W (ft)	Comment	
8,745.0	4,470.6	-31.2	-4,486.3	Last Cathedral Survey @ 8,745' MD	
8,800.0	4,470.4	-30.1	-4,541.3	Projection to TD @ 8,800' MD	

Checked By: _____ Approved By: _____ Date: _____