District 1 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W Grand Avenue. Artesia NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S St. Francis Dr. Santa Fe. NM 87505

State of New Mexico **Energy Minerals and Natural Resources** Department Oil Conservation Division 1220 South St. Francis Dr.

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office. For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

10321	۱٥	32	_\
-------	----	----	----

Pit Closed-Loop System Relow-Grade Tank or

Santa Fe, NM 87505

	Alternative Method P			tion
	Permit of a pit, closed-loop system of a pit, closed-loop sy Modification to an existing per Closure plan only submitted for oposed alternative method	stem, below-grade tar ystem, below-grade tar rmit	nk, or proposed alternations, or proposed alternations.	ative method native method
Instructions: Please submit one a	pplication (Form C-144) per ind	lividual pit, closed-loop	system, below-grade ta	nk or alternative request
Please be advised that approval of this request of environment. Nor does approval relieve the open	loes not relieve the operator of liab erator of its responsibility to compl	olity should operations re y with any other applicat	sult in pollution of surfaction of surfactions and surfactions and surface sur	e water, ground water or the y's rules, regulations or ordinances.
Operator Four Star Oil and Gas Compan	У	OGR	ID #· <u>131994</u>	
Address: Post Office Box 36366 Housto	n, TX 77236			
Facility or well name: <u>Jicarilla C 26 (BG7</u>	ſ 2)			
API Number: <u>30-039-05918</u>	O	CD Permit Number		
U/L or Qtr/Qtr 1 Section 21 Tow	nship 25N Range 5W	County R	10 Arriba	·
Center of Proposed Design. Latitude <u>36</u>	383036° Lo	ongitude <u>-107.359339</u>	<u>r</u>	NAD: □1927 🛛 1983
Surface Owner 🔲 Federal 🗀 State 🗀 Pri	vate 🛛 Tribal Trust or Indian A	llotment		
2. Pit: Subsection F or G of 19 15 17 11 Temporary. Drilling Workover Permanent Emergency Cavitatio Lined Unlined Liner type: Thick String-Reinforced Liner Seams Welded Factory G 3. Closed-loop System: Subsection H of Type of Operation. P&A Drilling a intent)	on	Volume	_bbl Dimensions L_	x W x D
☐ Drying Pad ☐ Above Ground Steel T	anks Haul-off Bins Oth	er		
☐ Lined ☐ Unlined Liner type: Thickne	Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other			
Liner Seams: Welded Factory	Other			
4.	id:Produced Water tuon	 r, 6-inch lift and automa	 tic overflow shut-off	
5. Alternative Method:				

Submittal of an exception request is required Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19 15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify	hospital,	
Netting: Subsection E of 19 15 17 11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)		
Signs: Subsection C of 19 15 17 11 NMAC 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers Signed in compliance with 19.15.3 103 NMAC		
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19 15.17 NMAC for guidance Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for	
Siting Criteria (regarding permitting): 19 15 17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.		
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No	
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No	
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site, Aerial photo; Satellite image	☐ Yes ☐ No ☐ NA	
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	Yes No	
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No	
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map, Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No	
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No	
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No	
Within a 100-year floodplain FEMA map	☐ Yes ☐ No	

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15 17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19 15 17 9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19 15.17 9 NMAC Sitting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17 10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19 15.17 12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15.17 9 NMAC and 19.15.17 13 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19 15 17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19 15 17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15 17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15 17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15.17 9 NMAC and 19 15 17.13 NMAC Previously Approved Design (attach copy of design) API Number. Previously Approved Operating and Maintenance Plan API Number (Applies only to closed-loop system that use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist: Subsection B of 19.15 17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19 15.17 9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17 11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19 15 17 11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17 11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17 11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17 12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15 17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19 15.17 9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15 17 13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15 17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground S Instructions: Please indentify the facility or facilities for the disposal of liquids, d facilities are required.		
	Disposal Facility Permit Number:	
	Disposal Facility Permit Number	
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations? Yes (If yes, please provide the information below) No		
Required for impacted areas which will not be used for future service and operations. Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19 15 17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19 15 17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17.13 NMAC		
Siting Criteria (regarding on-site closure methods only): 19 15 17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the comprovided below. Requests regarding changes to certain siting criteria may require considered an exception which must be submitted to the Santa Fe Environmental demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for	administrative approval from the appropriate dist. Bureau office for consideration of approval. Justi	rict office or may be
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data	obtained from nearby wells	Yes No
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data	obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - IWATERS database search; USGS; Data obtained from nearby wells		
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other sign lake (measured from the ordinary high-water mark) - Topographic map; Visual inspection (certification) of the proposed site	ificant watercourse or lakebed, sinkhole, or playa	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application - Visual inspection (certification) of the proposed site, Aerial photo; Satellite image		☐ Yes ☐ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database, Visual inspection (certification) of the proposed site		
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality, Written approval obtained from the municipality		☐ Yes ☐ No
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site		☐ Yes ☐ No
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division		☐ Yes ☐ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology Society; Topographic map	& Mineral Resources; USGS; NM Geological	☐ Yes ☐ No
Within a 100-year floodplain - FEMA map		☐ Yes ☐ No
On-Site Closure Plan Checklist: (19.15 17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15 17 10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15 17 13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved) Soil Cover Design - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC		

19.			
Operator Application Certification: I hereby certify that the information submitted with this application is true, accura	te and complete to the best of my knowledge and belief.		
Name (Print):	Title:		
Signature:	Date:		
e-mail address:	Telephone:		
20. OCD Approval: Permit Application (including closure plan) Closure Ph	en-(enly) OCD Conditions (see attachment)		
	Approval Date: 8/10/2012		
Title: Compliance Office ()	OCD Permit Number:		
21.			
Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.			
	☑ Closure Completion Date: July 13, 2012		
Ciosure Method: Waste Excavation and Removal On-Site Closure Method Alternat If different from approved plan, please explain.	ive Closure Method Waste Removal (Closed-loop systems only)		
Closure Report Regarding Weste Removal Closure For Closed-loop Systems' Instructions: Please indentify the facility or facilities for where the liquids, drill two facilities were utilized.	That Utilize Above Ground Steel Tanks or Haul-off Bins Only: ing fluids and drill cuttings were disposed. Use attachment if more than		
Disposal Facility Name:	Disposal Facility Permit Number:		
Disposal Facility Name:	Disposal Facility Permit Number:		
Were the closed-loop system operations and associated activities performed on or in the Yes (If yes, please demonstrate compliance to the items below) \(\subseteq \text{No} \)	n areas that will not be used for future service and operations?		
Required for impacted areas which will not be used for future service and operation Site Reclamation (Photo Documentation)	ns:		
☐ Soll Backfilling and Cover Installation ☐ Re-vegetation Application Rates and Seeding Technique			
Clasure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) See Attached Notices Proof of Deed Notice (required for on-site closure) Not Required Plot Plan (for on-site closures and temporary pits) Not Required Confirmation Sampling Analytical Results (if applicable) See Attached Analytical Results Waste Material Sampling Analytical Results (required for on-site closure) Not Required Disposal Facility Name and Permit Number Envirotech's Landfarm #2, Permit #: NM-01-0011 Soil Backfilling and Cover Installation See Attached Site Photographs and Approved Closure Plan Upon Abandonment of Site Site Reclamation (Photo Documentation) See Attached Site Photographs On-site Closure Location: Latitude			
8			
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure rebellef. I also certify that the closure complies with all applicable closure requirements.			
Name (Print): Ms. Laura Clepmey	Title: <u>Facilities Engineer</u>		
Signature:	Date:		
e-mail address: laura_clenney@chevron.com	Telephone: (281) 881-0322		

Diside I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 Disure III 1000 Rio Brazos Road, Aztec, NM 87410 1220 S. St. Francis Dr., Santo Fe, NM 87505

State of New Mexico **Energy Minerals and Natural Resources**

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Revised October 10, 2003

Form C-141

Submit 2 Copies to appropriate District Office in accordance with Rule 116 on back side of form

Release Notification and Corrective Action **OPERATOR** Initial Report ☐ Final Report Contact: Ms. Laura Clenney Telephone No. (281) 881-0322 Facility Type: Gas Well

Name of Company: Four Star Oil and Gas Company Address: Post Office Box 36366, Houston, TX 77236 Facility Name: Jicarilla C #26 (BGT 2) Surface Owner: Jicarilla Mineral Owner: Lease No.: 366610 LOCATION OF RELEASE Unit Letter Section Township Range Feet from the North/South Line Feet from the East/West Line County 25N 5W 1850 South 790 East Rio Amiba Latitude_36.383036° Longitude__-107.359339° **NATURE OF RELEASE** Type of Release: Produced Water Volume of Release: Unknown Volume Recovered: Not Applicable Source of Release: Below Grade Tank Date and Hour of Occurrence: Date and Hour of Discovery: Historical Not Applicable If YES, To Whom? Was Immediate Notice Given? ☐ Yes ☐ No 🏻 Not Required By Whom? Date and Hour Was a Watercourse Reached? If YES, Volume Impacting the Watercourse. ☐ Yes 🖾 No If a Watercourse was Impacted, Describe Fully.* No watercourse impacted. Describe Cause of Problem and Remedial Action Taken.* Produced water from a gas well at the above mentioned location formerly discharged into a Below Grade Tank (BGT) on location. The Below Grade Tank was removed on July 13, 2012. Soil sampling from directly beneath the tank in accordance with Subsection E of 19.15.17.13 NMAC was performed on July 13, 2012, and indicated that a release had occurred. Please reference the final C-141 documentation for remedial action taken. Describe Area Affected and Cleanup Action Taken.* A five (5)-point composite sample was collected from directly beneath the former BGT immediately once it was removed. The sample was analyzed in the field for total petroleum hydrocarbons (TPH) using USEPA Method 418.1, and in Envirotech's Analytical Laboratory for TPH using USEPA Method 8015, for benzene and total BTEX using USEPA Method 8021 and for total chlorides using USEPA Method 4500B. The sample returned results at or below the "Pit Rule" standards of 0.2 mg/kg benzene, 50 mg/kg total BTEX and 250 mg/kg total chlorides. The sample returned results above the 100 mg/kg TPH "Pit Rule" standard using USEPA Method 418.1, confirming that a release had occurred. Please reference the final C-141 documentation for cleanup action taken. I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations. OIL CONSERVATION DIVISION Signatun Approved by District Supervisor: Printed Name: Laura Clenney Title: Facilities Engineer Expiration Date, Approval Date: E-mail Address: laura.clenney@chevron.com Conditions of Approval: Attached

Attach Additional Sheets If Necessary

Phone: 281-881-0322

District 1
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IY
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Form C-141 Revised October 10, 2003

Submit 2 Copies to appropriate
District Office in accordance
with Rule 116 on back
side of form

Attached []

Release Notification and Corrective Action OPERATOR Initial Report Name of Company: Four Star Oil and Gas Company Contact: Ms. Laura Clenney Address: Post Office Box 36366, Houston, TX 77236 Telephone No. (281) 881-0322 Facility Name: Jicarilla C 26 (BGT 2) Facility Type: Gas Well Mineral Owner: Lease No.: 366610 Surface Owner: Jicarilla LOCATION OF RELEASE Unit Letter Section North/South Line Feet from the East/West Line Township Range Feet from the County 21 25N **SW** 1850 South 790 East Rio Arriba I Latitude 36,383036° Longitude -107.359339° NATURE OF RELEASE Type of Release: Produced Water Volume of Release: Unknown Volume Recovered: Not Applicable Source of Release: Below Grade Tank Date and Hour of Occurrence: Date and Hour of Discovery: Historical Not Applicable If YES, To Whom? Was Immediate Notice Given? ☐ Yes ☐ No ☒ Not Required By Whom? Date and Hour Was a Watercourse Reached? If YES, Volume Impacting the Watercourse. Yes 🛛 No If a Watercourse was Impacted, Describe Fully.* No watercourse impacted. Describe Cause of Problem and Remedial Action Taken.* Produced water from a gas well at the above mentioned location formerly discharged into a Below Grade Tank (BGT) on location. The Below Grade Tank was removed on July 13, 2012. Soil sampling from directly beneath the tank in accordance with Subsection E of 19.15.17.13 NMAC was performed on July 13, 2012, and indicated that a release had occurred. However, the sample returned results below the regulatory cleanup standards determined for the site. Describe Area Affected and Cleanup Action Taken.* A five (5)-point composite sample was collected from directly beneath the former BGT immediately once it was removed. The sample was analyzed in the field for total petroleum hydrocarbons (TPH) using USEPA Method 418.1, and in Envirotech's Analytical Laboratory for TPH using USEPA Method 8015, for benzene and total BTEX using USEPA Method 8021 and for total chlorides using USEPA Method 4500B. The sample returned results at or below the 'Pit Rule" standards of 0.2 mg/kg benzene, 50 mg/kg total BTEX and 250 mg/kg total chlorides. The sample returned results above the 100 mg/kg TPH regulatory standard using USEPA Method 418.1, confirming that a release had occurred. However, the sample returned results below the regulatory cleanup standard of 100 ppm TPH determined for this site using USEPA Method 8015. Analytical results are attached for your reference. I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, on local laws and/or regulations. OIL CONSERVATION DIVISION Signature Approved by District Supervisor: Printed Name: Laura Clenney Title: Facilities Engineer Approval Date: **Expiration Date:**

Conditions of Approval:

B-mail Address: laura.clenney@chevron.com

Phone: 281-881-0322

Attach Additional Sheets If Necessary

CHEVRON SAN JUAN BASIN BELOW GRADE TANK CLOSURE PLAN JICARILLA C 26 BGT #2

INTRODUCTION

In accordance with NMAC 19.15.17.9 (B) (4) and 19.15.17.13, Chevron (representing Chevron USA Inc, Chevron Midcontinent, L.P, and Four Star Oil and Gas Company) submits this Closure Plan for below grade tanks (BGTs) in New Mexico. This Closure Plan contains standard conditions that attach to multiple BGTs. If needed for a particular BGT, a modified Closure Plan for a proposed alternative closure will be submitted to the New Mexico Oil Conservation Division (NMOCD or the division) for approval prior to closure.

CLOSURE PLAN PROCEDURES AND PROTOCOLS (NMAC 19.15.17.9 (C) AND 19.15.17.13)

- 1) Chevron, or a contractor acting on the behalf of Chevron, will close a BGT within the time periods provided in NMAC 19.15.17.13 (A), or by an earlier date required by NMOCD to prevent an imminent danger to fresh water, public health, or the environment. NMAC 19.15.17.13 (A).
- 2) Chevron, or a contractor acting on behalf of Chevron, will close as existing BGT that does not meet the requirements of NMAC 19.15.17.11 (I) (1 through 4) or is not included in NMAC 19.15.17.11 (I) (5) within five years after June 16, 2008, if not retrofitted to comply with NMAC 19.15.17.11 (I) (1 through 4). NMAC 19.15.17.13 (A) (4).
- 3) Chevron shall close an existing below-grade tank that does not meet the requirements of Paragraphs (1) though (4) of Subsection I of 19.15.17.11 NMAC. If not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, prior to any sale or change of operator pursuant to 19.15.9.9 NMAC.
 - a. The Jicarilla C 26 BGT #2 is being closed in accordance to 1 and 2 above. The site was not up for sale or change of operator prior to closure activities.
- 4) Chevron, or a contractor acting on behalf of Chevron, will close a permitted BGT within 60 days of cessation of the BGT's operation or as required by the transitional provisions of NMAC 19.15.17.17
 (B) in accordance with a closure plan that the appropriate division district office approves. NMAC 19.15.17.13 (A)(9) and 19.15.17.9 (C).
 - a. The Closure Plan was submitted on March 4, 2010, to the division's environmental bureau, in accordance with 19.15.17.9 Subsection C NMAC and 19.15.17.13 NMAC. The Closure Plan was approved on July 5, 2012, by Mr. Brad Jones with the NMOCD, Santa Fe Office.
- 5) In accordance with NMAC 19.15.17.13 (J)(1), Chevron will notify the surface owner by certified mail, return receipt requested, of its plans to close a BGT prior to beginning closure activities. Evidence of mailing of the notice to the address of the surface owner shown in the county tax records is sufficient to demonstrate compliance. Chevron will notify the appropriate division district office verbally or by other means at least 72 hours, but no more than one (1) week, prior to any closure operation. The notice shall include the operator's name and the location to be closed by unit letter, section, township and range. If the closure is associated with a particular well, then the notice shall also include the well's name, number and API number. NMAC 19.15.17.13 (J)(2).
 - a. Please find attached the written notification to the district office sent on June 9, 2012.
 - b. Please find attached the written notification to the landowner sent on June 10, 2012.

- 6) Chevron North America, or a contractor acting on behalf of Chevron, will remove all liquids and sludge from a BGT prior to implementing a closure method and will dispose of the liquids and sludge in a division approved facility. NMAC 19.15.17.13(E)(1). A list of Chevron currently approved disposal facilities is included at the end of this document
 - a. All waste material was removed from the BGT by Riley Services and transported to Envirotech's NMOCD approved Landfarm #2 on July 13, 2012; see attached Bill of Lading.
- 7) The proposed method of closure for this Closure Plan is waste excavation and removal. NMAC 19.15.17.13(E)(1).
 - a. Soil samples collected from below the BGT were below the NMOCD Guidelines for the Remediation of Spills, Leaks, and Releases. No waste was excavated or removed from this site for closure.
- 8) Chevron North America, or a contractor acting on behalf of Chevron, shall remove the BGT and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves. When required, prior approval for disposal will be obtained. NMAC 19.15.17.13(E)(2). Documentation regarding disposal of the BGT and its associated liner, if any, will be included in the closure report.
 - a. A liner was not associated with this BGT. The BGT was made of fiber-glass material and will be disposed of at the San Juan Regional Landfill in compliance with NMAC 19.15.35.8 allowable materials.
- 9) Waste generated during closure will be handled and disposed of in accordance with applicable laws. NMAC 19 15 35.8 (C)(1)(m) provides that plastic pit liners may be disposed at a solid waste facility without testing before disposal, provided they are cleaned well.
 - a. A plastic liner was not associated with this BGT.
- 10) Chevron, or a contractor acting on behalf of Chevron, will remove on-site equipment associated with a BGT unless the equipment is required for some other purpose. NMAC 19.15.17.13(E)(3).
 - a. <u>Chevron has removed the BGT and associated equipment that will not be reused on-site; see attached Site Photography.</u>
- 11) Chevron, or a contractor acting on behalf of Chevron, will test the soils beneath the BGT to determine whether a release has occurred. At a minimum, 5 point composite samples will be collected along with individual grab samples from any area that is wet, discolored, or showing other evidence of a release. Samples will be analyzed for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA Method 418.1 or other EPA method that the division approves, does not exceed 100 mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg; or the background concentration, whichever is greater. Chevron, or a contractor acting on behalf of Chevron, will notify the NMOCD Division District office of its results on form C-141. NMAC 19.15.17.13(E)(4).

Sample ID	TPH (418.1)	TPH (8015)	Benzene	Total BTEX	Chlorides
5 Pt.					
Composite	236 ppm	<0.01 ppm	<0.01 ppm	0.0385 ppm	120 ppm

- 12) If Chevron or the division determines that a release has occurred, Chevron will comply with NMAC 19.15 29 and 19.15.30, as appropriate. NMAC 19.15.17.13(E)(5).
 - a. The TPH using EPA Method 418.1 levels were above the release limit of 100 mg/kg for this BGT; see attached C-141 for release notification.
 - b. The spill closure standards were determined to be 100 ppm TPH and 100 ppm organic vapors in accordance with the NMOCD Guidelines for Remediation of Leaks, Spill and Releases and the location of the well site on the Jicarilla Apache Reservation. The sample from beneath the former BGT returned results below the spill closure standard for TPH using USEPA Method 8015 and below the regulatory standard for organic vapors. Therefore no further action was required for BGT 2.
- 13) If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in NMAC 19.15.17.13(E)(4), Chevron will backfill the excavation with compacted, non-waste containing, earthen materials; construct a division prescribed soil cover; recontour and re-vegetate the site. The division prescribed soil cover, re-contouring and re-vegetation requirements shall comply with NMAC 19.15.17.13(G, H and I). NMAC 19.15.17.13 (E)(6).
 - a. BGT pit was backfilled with clean earthen material in accordance with 19.15.17.13 Subsection E Paragraph (6) NMAC.
 - b. Well site is still in use re-vegetation will occur upon the decommissioning of the well site.
- 14) As per NMAC 19.15.17.13(G)(1), once Chevron has closed a BGT or is no longer using the BGT or an area associated with the BGT, Chevron will reclaim the BGT location and all areas associated with it including associated access roads not needed by the surface estate owner to a safe and stable condition the blends with the surrounding undisturbed area. Chevron will substantially restore impacted surface area to the condition that existed prior to its oil and gas operations by placement of soil cover as provided in NMAC 19.15.17.13(H) (see below), re-contour the location and associated areas to a contour that approximates the original contour and blends with the surrounding topography, and revegetate according to NMAC 19.15.17.13(I). NMAC 19.15.17.13(G)(1).
- 15) Chevron may propose an alternative to the re-vegetation requirement of NMAC 19.15.17.13(G)(1) if it demonstrates that the proposed alternative effectively prevents erosion, and protects fresh water, human health and the environment. The proposed alternative must be agreed upon in writing by the surface owner. Chevron will submit the proposed alternative, with written documentation that the surface owner agrees to the alternative, to the division for approval. NMAC 19.15.17.13(G)(2).
- 16) Soil cover for closures where Chevron has removed the pit contents or remediated the contaminated soil to the division's satisfaction will consist of the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater. NMAC 19.15.17.13(H)(1).
- 17) Chevron will construct the soil cover to the site's existing grade and prevent ponding of water and erosion of the cover material. NMAC 19.15.17.13(H)(3).
- 18) As per NMAC 19.15.17.13(I)(1) and 19.15.17.13(G)(2), Chevron will seed or plant disturbed areas during the first growing season after it is no longer using a BGT or an area associated with the BGT including access roads unless needed by the surface estate owner as evidenced by a written agreement with the surface estate owner, if any and written approval by NMOCD.
- 19) Seeding will be accomplished by drilling on the contour whenever practical or by other division approved methods. Chevron will obtain vegetative cover that equals 70% or the native perennial vegetative cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation) consisting of at least three native plant species, including at least one grass, but not including noxious

weeds, and maintain that cover through two successive growing seasons. During the two growing seasons that prove viability, Chevron will not artificially irrigate the vegetation. NMAC 19.15.17.13(I)(2)

- 20) Chevron will notify the division when it has seeded or planted and when it successfully achieves revegetation NMAC 19.15.17.13(I)(5)
- 21) Seeding or planting will be repeated until Chevron successfully achieves the required vegetative cover. NMAC 19.15.17.13(I)(3)
- 22) When conditions are not favorable for the establishment of vegetation, such as periods of drought, the division may allow Chevron to delay seeding or planting until soil moisture conditions become favorable or may require Chevron to use additional cultural techniques such as mulching, fertilizing, irrigating, fencing or other practices. NMAC 19.15.17.13(I)(4).
 - a. The well site and area around the BGT are still in use and will be re-contoured and revegetated in accordance with steps 14 through 22 upon decommissioning of the well site.
- 23) As per NMAC 19.15.17.13(K), within 60 days of closure completion, Chevron will submit a closure report containing the elements required by NMAC 19.15.17.13(K) including.
 - a. Confirmation sampling results,
 - b. A plot plan, Not Required for Below-Grade Tanks
 - Details on back-filling, capping and covering, where applicable, including re-vegetation
 application rates and seeding technique, BGT Area still in use for Daily Operational
 Activities
 - **d.** Proof of closure notice to the surface owner, if any, and the division,
 - e. Name and permit number of disposal facility, and
 - f. Photo documentation.
- 24) The closure report will be filed on NMOCD Form C-144. Chevron will certify that all information in the closure report and attachments is correct and that it has been complied with all applicable closure requirements and conditions specified in the approved closure plan. NMAC 19.15.17.13(K)
 - a. Please find attached the C-144 BGT Closure Documentation.
- 25) As requested, the following are the current Chevron approved Waste Disposal Sites for the identified waste streams:

Soils and Sludges

i) Envirotech, Inc. Soil Remediation Facility, Permit No. NM-01-0011

Solids

San Juan County Regional Landfill (NMAC 19.15.35.8 items only, with prior NMOCD approval when required)

Liquids

- iii) Key Energy Disposal Facility, Permit No. NM-01-0009
- iv) Basin Disposals Facility, Permit No. NM-01-005
- 26) These waste disposal sites are subject to change if their certification is lost or they are closed or other more appropriate, equally protective sites become available. Chevron will provide notice if such a change is affected.

	envirotech
--	------------

PHONE: (505) 632-0615 • 5796 U.S. HIGHWAY 64 • FARMINGTON, NEW MEXICO 87401

Bill of Lading

MANIFEST # _______41703

DATE 7-13-12 JOB#9000

COMPLETE DESCRIPTION OF SHIPMENT TRANSPORTING COMPANY LOAD NO. POINT OF ORIGIN DESTINATION MATERIAL **GRID BBLS DRIVER SIGNATURE YDS COMPANY** TRK# TIME Cheviled BFLFI-5 FANKBOHONS 1809 1355 516 C 2/0 **RESULTS:** NOTES: **LANDFARM** CHLORIDE TEST **EMPLOYEE:** PAINT FILTER TEST Certification of above receival & placement "I certify the material hauled from the above location has not been added to or mixed with, and is the same material received from the above mentioned Generator, and that no additional materials have been added." TRANSPORTER CO. Riley Ind. NAME Long Brank Jr. SIGNATURE of f.

COMPANY CONTACT Antonio PHONE 535-212-1711 DATE 7-13-12 Signatures required prior to distribution of the legal document.



April E. PohlRegulatory Specialist
Midcontinent Business Unit

Chevron North America Exploration and Production Company (A Chevron U.S.A. Inc. Division)

332 Road 3100 Aztec, New Mexico 87410 Tel: 505-333-1941 Fax: 505-334-7134

April.Pohl@chevron.com

VIA EMAIL

July 10, 2012

Sherrie Landon US Bureau of Land Management 6251 College Blvd, Ste A Farmington, New Mexico 87402

RE: BELOW GRADE TANK CLOSURE NOTIFICATION

JICARILLA C #28E	WELL SITE API 30-039-23434
JICARILLA C #26	WELL SITE API 30-039-05918
IICARILLA C #35	WELL SITE API 30-039-23433

Dear Ms. Landon,

This letter serves as surface owner notification for Below Grade Tank closure activities at the following well sites:

JICARILLA C #28E	API 30-039-23434	S 34, T 25N, R 5W	Rio Arriba County
JICARILLA C #26	API 30-039-05918	S21, T 25N, R 5W	RIO ARRIBA COUNTY
IICARILLA C #35	API 30-039-23433	S21. T 25N. R 5W	RIO ARRIBA COUNTY

These wells are operated by Four Star Oil & Gas Co. Closure activities are anticipated to occur and be completed during July, 2012.

We appreciate the opportunity to be of service. If you have any questions or require additional information, please contact me at (505) 333-1941.

Respectfully submitted,

April E. Pohl Regulatory Specialist Midcontinent Business Unit 32 Road 3100 Aztec, New Mexico 87410

Toni McKnight

From:

Pohl, April E [April.Pohl@chevron.com]

Sent:

Monday, July 09, 2012 9:58 AM Powell, Brandon, EMNRD

Cc:

Clenney, Laura E; Macurdy, David W; Oliver, Adam W.

Subject:

RE: BGT closures planned for week of July 9-13

Thank you very much, I will relay the information. April

From: Powell, Brandon, EMNRD [mailto:Brandon.Powell@state.nm.us]

Sent: Monday, July 09, 2012 9:46 AM

To: Pohl, April E

Subject: RE: BGT closures planned for week of July 9-13

Good Morning Mrs. Pohl-

This being the initial notification for Chevron to comply with rule 19.15.17.13.J closures can commence between <u>July 12th and July 16th</u>. Please also ensure you have a copy of the approved closure plan for each wells prior to closure.

Thank You Brandon Powell I & E Supervisor New Mexico Oil Conservation Office: (505) 334-6178 ext. 116

"He who wishes to gain knowledge is wiser than he who thinks he has knowledge (unknown)"

From: Pohl, April E [mailto:April.Pohl@chevron.com]

Sent: Monday, July 09, 2012 9:37 AM

To: Powell, Brandon, EMNRD

Subject: BGT closures planned for week of July 9-13

Mr. Powell:

Please be advised Chevron will be closing below grade tanks at the following locations during the week of July 9-13, 2012:

Jicarilla C 26

30-039-05918

Jicarilla C 28E

30-039-23434

Jicarilla C 35 30-039-23433

Thank you,

April E. Pohl
Regulatory Specialist
Aztec, NM
Office 505-333-1941
Fax 505-334-7134
Cell 505-386-8074
April.Pohl@chevron.com



EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:

Chevron North America

92270-0974

Sample No.:

Project #: Date Reported: 7/24/2012

Sample ID:

BGT Composite

Date Sampled: Date Analyzed: 7/13/2012

Sample Matrix:

Soil

7/13/2012

Preservative:

Cool

Analysis Needed:

TPH-418.1

Condition:

Cool and Intact

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

236

5.0

ND = Parameter not detected at the stated detection limit

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis

of Water and Waste, USEPA Storet No. 4551, 1978.

Comments:

Jicarilla C 26

Instrument calibrated to 200 ppm standard. Zeroed before each sample

Analyst

John Rollins

Printed

Toni McKnight, EIT

Printed

5796 US Highway 64, Farmington, NM 87401

Ph (505) 632-0615 Fx (505) 632-1865





CONTINUOUS CALIBRATION EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

~-I		ate:
t .ai	1 1	are.

13-Jul-12

Parameter	Standard Concentration mg/L	Concentration Reading mg/L	
TPH	100	-	
	200		
	500	528	
	1000		

The accepted percent relative deviation (%RSD) of the calibration factor is less than 20% over the working range.

	7/24/2012
Analyst	Date
John Rollins	
Print Name	
Toni Melmit	7/24/2012
Review	Date

Toni McKnight, EIT

Print Name

5796 US Highway 64, Farmington, NM 87401

Ph (505) 632-0615 Fx (505) 632-1865





Field Chloride

Client: Sample No.:

Sample ID:

Chevron North America

BGT Composite

Sample Matrix. Preservative:

Soil Cool

Condition:

Cool and Intact

Project #:

92270-0974

Date Reported: Date Sampled:

7/24/2012 7/13/2012

Date Analyzed:

7/13/2012

Analysis Needed:

Chloride

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Field Chloride

ND

32.0

ND = Parameter not detected at the stated detection limit.

References:

"Standard Methods for the Examination of Water and Wastewater", 18th ed., 1992

Hach Company Quantab Titrators for Chloride

Comments:

Jicarilla C 26

Analyst

John Rollins

Printed

Review

Toni McKnight, EIT

Printed





Report Summary

Client: Chevron

Chain of Custody Number: 14076

Samples Received: 07-13-12

Job Number: 92270-0974

Sample Number(s): 62599

Project Name/Location: Jicarilla C #26

Entire Report Reviewed By:

Date: 7/16/12

The analytical results in this report are based upon information supplied by you, the client, and are for your exclusive use. If you have any questions regarding this data package, please do not hesitate to call.





EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client [.]	Chevron	Project #:	92270-0974
Sample ID:	BGT	Date Reported:	07-16-12
Laboratory Number:	62599	Date Sampled:	07-13-12
Chain of Custody No.	14076	Date Received ⁻	07-13-12
Sample Matrix:	Soil	Date Extracted:	07-13-12
Preservative:	Cool	Date Analyzed.	07-16-12
Condition:	Intact	Analysis Requested:	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)			
Gasoline Range (C5 - C10)	ND	0.2			
Diesel Range (C10 - C28)	ND	0.1			
Total Petroleum Hydrocarbons	ND				

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

Jicarilla C #26



Ph (505) 632-0615 Fx (505) 632-1865





EPA Method 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Quality Assurance Report

% Recovery

97.6%

97.6%

Accept. Range

75 - 125%

75 - 125%

Client:	QA/QC		Project #:		N/A			
Sample ID:	0716TCAL QA	/QC	Date Reported	:	07-16-12			
Laboratory Number:	62576		Date Sampled	•	N/A			
Sample Matrix:	Methylene Chl	oride	Date Received	l :	N/A			
Preservative:	N/A		Date Analyzed	:	07-16-12			
Condition:		Analysis Requ	ested:	TPH				
The state of the s	I-Cal Date	i l-Cal RF:	C-Cal RF:	% Difference	Accept. Range			
Gasoline Range C5 - C10		9.9960E+02			0 - 15%			
Diesel Range C10 - C28	07-16-12	9.9960E+02	1.0000E+03	0.04%	0 - 15%			
Blank Conc. (mg/L - mg/	Kg)	Concentration	ré é é	Detection Limit	í			
Gasoline Range C5 - C10		ND		0.2	•			
Diesel Range C10 - C28		ND		0.1				
Total Petroleum Hydrocarbor	ıs	ND						
Duplicate Conc. (mg/Kg)	Sample :	Duplicate :	% Difference	Accept. Range	•			
Gasoline Range C5 - C10	ND	ND	0.0%	0 - 30%	•			
Diesel Range C10 - C28	764	768	0.5%	0 - 30%				

ND - Parameter not detected at the stated detection limit.

References:

Spike Conc. (mg/Kg)

Gasoline Range C5 - C10

Diesel Range C10 - C28

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Was

Spike Added Spike Result

244

990

250

250

SW-846, USEPA, December 1996.

Sample

ND

764

Comments:

QA/QC for Samples 62576-62586 and 62599





EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	Chevron	Project #:	92270-0974
Sample ID:	BGT	Date Reported:	07-16-12
Laboratory Number:	62599	Date Sampled:	07-13-12
Chain of Custody:	14076	Date Received:	07-13-12
Sample Matrix:	Soil	Date Analyzed:	07-16-12
Preservative:	Cool	Date Extracted:	07-13-12
Condition:	Intact	Analysis Requested:	BTEX
		Dilution:	50

		Det.	
	Concentration	Limit	
Parameter	(ug/Kg)	(ug/Kg)	
Benzene	ND	10.0	
Toluene	28.1	10.0	
Ethylbenzene	ND	10.0	
p,m-Xylene	ND	10.0	
o-Xylene	10.4	10.0	
Total BTEX	38.5		

ND - Parameter not detected at the stated detection limit

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	81.6 %
	1,4-difluorobenzene	105 %
	Bromochlorobenzene	98.5 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846

USEPA, December 1996.

Comments: Jicarilla C #26



Ph (505) 632-0615 Fx (505) 632-1865

Three Springs • 65 Mercado Street, Suite 115, Durango, CO 81301





EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Detection Limits (ug/L)	Client: Sample ID: Laboratory Number: Sample Matrix: Preservative: Condition:	N/A 0716BCAL QA/Q0 62599 Soil N/A N/A		Project #: Date Reported: Date Sampled: Date Received: Date Analyzed: Analysis: Dilution:	()) (E	VA 07-16-12 VA VA 07-16-12 BTEX		
Benzene 7.8657E-06 7.8657E-06 0.000 ND 0.2	Calibration and	I-Cal RF:	C-Cal RF:	%Diff.	Blank	Detect.		
Toluene 7.5509E-06 7.5509E-06 0.000 ND 0.2 Ethylbenzene 8.2017E-06 8.3147E-06 0.014 ND 0.2 p,m-Xylene 6.4337E-06 6.4337E-06 0.000 ND 0.2 o-Xylene 8.8189E-06 8.8189E-06 0.000 ND 0.2 Duplicate Conc. (ug/Kg) Sample Duplicate %Diff. Accept Range Detect. Limit Benzene ND ND 0.00 0 - 30% 10 Toluene 28.1 28.4 0.01 0 - 30% 10 Ethylbenzene ND ND 0.00 0 - 30% 10 p,m-Xylene ND ND 0.00 0 - 30% 10 Spike Conc. (ug/Kg) Sample Amount Spiked Spiked Sample % Recovery Accept Range Benzene ND 2500 3105 124 39 - 150 Toluene 28.1 2500 3025 120 46 - 148 Ethylbenzene ND 2	Detection Limits (ug/L)		Accept. Range 0-159	6 Capital A	Conc	្ Limit 📆 🤄		
Semble S	Benzene	7.8657E-06	7.8657E-06					
p,m-Xylene 6.4337E-06 8.4337E-06 8.4337E-06 0.000 ND 0.2 Duplicate Conc. (ug/Kg) Sample Duplicate %Diff. Accept Range Detect. Limit Benzene ND ND 0.00 0 - 30% 10 Toluene 28.1 28.4 0.01 0 - 30% 10 Ethylbenzene ND ND 0.00 0 - 30% 10 p,m-Xylene ND ND 0.00 0 - 30% 10 o-Xylene 10.4 10.4 0.00 0 - 30% 10 Spike Conc. (ug/Kg) Sample Amount Spiked Spiked Sample % Recovery Accept Range Benzene ND 2500 3105 124 39 - 150 Toluene 28.1 2500 3025 120 46 - 148 Ethylbenzene ND 2500 2889 116 32 - 160 p,m-Xylene ND 5000 6244 125 46 - 148		7.5509E-06	7 5509E-06					
Duplicate Conc. (ug/Kg) Sample Duplicate %Diff. Accept Range Detect. Limit Benzene ND ND 0.00 0 - 30% 10 Toluene 28.1 28.4 0.01 0 - 30% 10 Ethylbenzene ND ND 0.00 0 - 30% 10 p,m-Xylene ND ND 0.00 0 - 30% 10 o-Xylene 10.4 10.4 0.00 0 - 30% 10 Spike Conc. (ug/Kg) Sample Amount Spiked Spiked Sample % Recovery Accept Range Benzene ND 2500 3105 124 39 - 150 Toluene 28.1 2500 3025 120 46 - 148 Ethylbenzene ND 2500 2889 116 32 - 160 p,m-Xylene ND 5000 6244 125 46 - 148	-				•	•		
Duplicate Conc. (ug/Kg) Sample Duplicate %Diff. Accept Range Detect. Limit Benzene ND ND 0.00 0 - 30% 10 Toluene 28.1 28.4 0.01 0 - 30% 10 Ethylbenzene ND ND 0.00 0 - 30% 10 p,m-Xylene ND ND 0.00 0 - 30% 10 o-Xylene 10.4 10.4 0.00 0 - 30% 10 Spike Conc. (ug/Kg) Sample Amount Spiked Spiked Sample % Recovery Accept Range Benzene ND 2500 3105 124 39 - 150 Toluene 28.1 2500 3025 120 46 - 148 Ethylbenzene ND 2500 2889 116 32 - 160 p,m-Xylene ND 5000 6244 125 46 - 148	- · ·							
Benzene ND ND 0.00 0 - 30% 10 Toluene 28.1 28.4 0.01 0 - 30% 10 Ethylbenzene ND ND 0.00 0 - 30% 10 p,m-Xylene ND ND 0.00 0 - 30% 10 Spike Conc. (ug/Kg) Sample Amount Spiked Spiked Sample % Recovery Accept Range Benzene ND 2500 3105 124 39 - 150 Toluene 28.1 2500 3025 120 46 - 148 Ethylbenzene ND 2500 2889 116 32 - 160 p,m-Xylene ND 5000 6244 125 46 - 148	o-Aylene	6.8169C-VD	6.6169E-00	0.000	ND	0.2		
Toluene 28.1 28.4 0.01 0 - 30% 10 Ethylbenzene ND ND 0.00 0 - 30% 10 p,m-Xylene ND ND 0.00 0 - 30% 10 o-Xylene 10.4 10.4 0.00 0 - 30% 10 Spike Conc. (ug/Kg) Sample Amount Spiked Spiked Sample % Recovery Accept Range Benzene ND 2500 3105 124 39 - 150 Toluene 28.1 2500 3025 120 46 - 148 Ethylbenzene ND 2500 2889 116 32 - 160 p,m-Xylene ND 5000 6244 125 46 - 148	Duplicate Conc. (ug/Kg)	Sample	Duplicate	%Diff.	Accept Range	Detect. Limit		
Ethylbenzene p,m-Xylene ND ND ND ND 0.00 0 - 30% 10 0.00 0 - 30% 10 0.00 0 - 30% 10 0.00 0 - 30% 10 0.00 0 - 30% 10 Spike Conc. (ug/Kg) Sample Amount Spiked Spiked Sample % Recovery Accept Range Benzene ND 2500 3105 124 39 - 150 150 150 150 150 150 150 150 150 150	Benzene	ND	ND	0.00	0 - 30%	10		
p,m-Xylene ND ND 0.00 0 - 30% 10 co-Xylene 10.4 10.4 10.4 0.00 0 - 30% 10 Spike Conc. (ug/Kg) Sample Amount Spiked Spiked Sample % Recovery Accept Range Benzene ND 2500 3105 124 39 - 150 Toluene 28.1 2500 3025 120 46 - 148 Ethylbenzene ND 2500 2889 116 32 - 160 p,m-Xylene ND 5000 6244 125 46 - 148						- -		
o-Xylene 10.4 10.4 0.00 0 - 30% 10 Spike Conc. (ug/Kg) Sample Amount Spiked Spiked Sample % Recovery Accept Range Benzene ND 2500 3105 124 39 - 150 Toluene 28.1 2500 3025 120 46 - 148 Ethylbenzene ND 2500 2889 116 32 - 160 p,m-Xylene ND 5000 6244 125 46 - 148								
Spike Conc. (ug/Kg) Sample Amount Spiked Spiked Sample % Recovery Accept Range Benzene ND 2500 3105 124 39 - 150 Toluene 28.1 2500 3025 120 46 - 148 Ethylbenzene ND 2500 2889 116 32 - 160 p,m-Xylene ND 5000 6244 125 46 - 148	• •		• • • •					
Benzene ND 2500 3105 124 39 - 150 Toluene 28.1 2500 3025 120 46 - 148 Ethylbenzene ND 2500 2889 116 32 - 160 p,m-Xylene ND 5000 6244 125 46 - 148	o-Xylene	10.4	10.4	0.00	0 - 30%	10		
Toluene 28.1 2500 3025 120 46 - 148 Ethylbenzene ND 2500 2889 116 32 - 160 p,m-Xylene ND 5000 6244 125 46 - 148	Spike Conc. (ug/Kg)	Sample	Amount Spiked	Spiked Sample	% Recovery	Accept Range		
Ethylbenzene ND 2500 2889 116 32 - 160 p,m-Xylene ND 5000 6244 125 46 - 148	Benzene	ND	2500	3105	124	39 - 150		
p,m-Xylene ND 5000 6244 125 46 - 148	Toluene	28.1	2500	3025	120	46 - 148		
p,m-Xylene ND 5000 6244 125 46 - 148	Ethylbenzene	ND	2500	2889	116	32 - 160		
	•	ND	5000	6244	125	46 - 148		
	o-Xylene	10.4				46 - 148		

ND - Parameter not detected at the stated detection limit.

Dilution: Spike and spiked sample concentration represent a dilution proportional to sample dilution.

References¹

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using

Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996.

Comments: QA/QC for Samples 62599



Ph (505) 632-0615 Fx (505) 632-1865

Three Springs - 65 Mercado Street, Suite 115, Durango, CO 81301





Chloride

92270-0974 Project #: Client: Chevron 07-16-12 Sample ID: **BGT** Date Reported: Lab ID#: 62599 Date Sampled: 07-13-12 Date Received: 07-13-12 Sample Matrix: Soil Date Analyzed: 07-16-12 Preservative: Cool Condition: Chain of Custody: 14076 Intact

Parameter

Concentration (mg/Kg)

Total Chloride

120

Reference:

U.S E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983.

Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992


Comments:

Jicarilla C #26



Ph (505) 632-0615 Fx (505) 632-1865

Three Springs - 65 Mercado Street, Suite 115, Durango, CO 81301



RUSH

CHAIN OF CUSTODY RECORD


14076

Client: Project Name / Location: Chevron Dicarilla C #26							ANALYSIS / PARAMETERS																
Email results to:			Sampler Name:					8021)	8260)	S				-									
Client Phone No.:			ient No.: 32270 - C	<u> </u>	/				TPH (Method 8015)	BTEX (Method 8021)	VOC (Method 8260)	RCRA 8 Metals	Cation / Anlon		TCLP with H/P	CO Table 910-1	418.1)	RIDE				Sample Cool	Sample Intact
Sample No./ Identification	Sample Date	Sample Time	Lab No.	No./Vo of Conta	olume	Pr HgCl ₂	reserva HCI	tive	TPH	BTEX	80	RCRA	Cation	졅	1CLP	CO Ta	TPH (418.1)	CHLORIDE				Samp	Sampl
BGT	7/13/12	14:10	62599	4 57	2 1/2			X	X	X								X		1	-	X	X
				-			-		_			-	-					_	H	1	+	+	
																				1	1	\Box	
				-			-						<u></u>					-		+	+	\dashv	
																					\pm	<u></u>	
	 																				+	_	
	+				<u></u>															+	+	+	
Relinquished by: (Signature)			>	Date 7	Time	Recei				ure)							<u> </u>	<u></u>			ate	Tin	
Helinquished by: (Signature)			1, 20.00		Recei	ved b	ıy: (Si	gnati	ure)														
Sample Matrix Soil∱ Solid Słudge ☐	Aqueous [] Other [
Sample(s) dropped off after **EDS H** 5795 US Highway 6	f .				N ♥ Ana						uranc	30. C	O 813	301 •	labor	atory	r@en	virote	ch-inc	.com	المصيي		

Site Photography Chevron North America Jicarilla C #26 Well Site Below Grade Tank Closure Project Number 92270-0974 July 13, 2012



Picture 1: Jicarilla C #26 Well Site

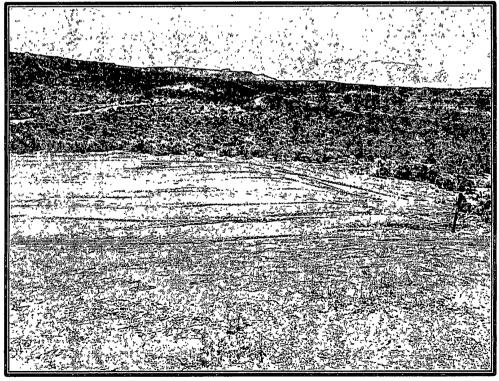

Picture 2: Reclaimed area from BGT.



RCVD AUG 9'12

OIL CONS. DIV.

DIST. 3

August 2, 2012

Project Number 92270-0974

Phone: (505) 334-6178

Mr. Brandon Powell New Mexico Oil Conservation Division 1000 Rio Brazos Road Aztec. New Mexico 87410

RE: BELOW-GRADE TANK CLOSURE DOCUMENTATION FOR THE JICARILLA C 26 WELL SITE (BGT 2), RIO ARRIBA COUNTY, NEW MEXICO

Dear Mr. Powell:

On behalf of Chevron North America, please find enclosed the Below-Grade Tank (BGT) Closure Documentation for BGT closure activities conducted at the Jicarilla C 26 well site located in Section 21, Township 25 North, Range 5 West, Rio Arriba County, New Mexico.

This report details results above the release determination limit of 100 parts per million (ppm) for total petroleum hydrocarbons (TPH) using USEPA Method 418.1, confirming a release had occurred; see attached *BGT Closure Documentation*. The closure standard for the site was determined to be 100 ppm TPH in accordance with the NMOCD Guidelines for Remediation of Leaks, Spill and Releases and the location of the well site on the Jicarilla Apache Reservation. The sample returned results below the closure standard determined for this site using USEPA Method 8015; see attached *Analytical Results*. Envirotech, Inc. recommends no further action in regards to this incident.

We appreciate the opportunity to be of service. If you have any questions or require additional information, please contact our office at (505) 632-0615.

Respectfully Submitted,

ENVIROTECH, INC.

Ion Milmyt

Toni McKnight, EIT

Environmental Project Manager tmcknight@envirotech-inc.com

Enclosures: Below-Grade Tank Closure Documentation

Email Cc: Ms. Laura Clenney – Chevron NA

Mr. Don Lindsey - Chevron NA