

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator
Four Star Oil and Gas Company

3a. Address
11111 S. Wilcrest Houston, Tx. 77099

3b. Phone No. (include area code)
(281) 561-4991

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
1450' from the North line & 1190' from the West line Sec. 27 T25N, R5W NMPM

5. Lease Serial No.

Jic Contract 34

6. If Indian, Allottee or Tribe Name
Jicarilla Apache

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

Jicarilla C #8

9. API Well No.

30-039-05845

10. Field and Pool, or Exploratory Area

Blanco-P.C. South

11. County or Parish, State

San Juan, New Mexico

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- | | | | |
|---|--|--|---|
| <input type="checkbox"/> Acidize | <input type="checkbox"/> Deepen | <input type="checkbox"/> Production (Start/Resume) | <input type="checkbox"/> Water Shut-Off |
| <input type="checkbox"/> Alter Casing | <input type="checkbox"/> Fracture Treat | <input type="checkbox"/> Reclamation | <input type="checkbox"/> Well Integrity |
| <input type="checkbox"/> Casing Repair | <input type="checkbox"/> New Construction | <input type="checkbox"/> Recomplete | <input type="checkbox"/> Other _____ |
| <input type="checkbox"/> Change Plans | <input checked="" type="checkbox"/> Plug and Abandon | <input type="checkbox"/> Temporarily Abandon | |
| <input type="checkbox"/> Convert to Injection | <input type="checkbox"/> Plug Back | <input type="checkbox"/> Water Disposal | |

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Four Star Oil & Gas Company intends to plug & abandon the subject well according to the attached procedure.

2005 MAR 14 PM 9 57
RECEIVED
OTO FARMINGTON NM

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Kenneth W. Jackson

Title Regulatory Specialist

Signature

Kenneth W. Jackson

Date

3/10/05

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by **Original Signed: Stephen Mason**

Title

Date

APR 20 2005

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

NMOCD

PLUG AND ABANDONMENT PROCEDURE

JICARILLA C #8
PC
SEC. 27, T25N, R5W
RIO ARriba COUNTY, NM

NOTE: ALL CEMENT VOLUMES USE 100% EXCESS OUTSIDE PIPE AND 50' EXCESS INSIDE PIPE. THE STABILIZING WELLBORE FLUID WILL BE 8.34 PPG, SUFFICIENT TO BALANCE ALL EXPOSED FORMATION PRESSURES.

1. INSTALL AND TEST RIG ANCHORS. PREPARE BLOW PIT. COMPLY WITH ALL BLM, AND TEXACO REGULATIONS.

2. MOL AND RU. CONDUCT SAFETY MEETING WITH ALL PERSONNEL ON LOCATION. NU RELIEF LINE. BLOW DOWN WELL, AND KILL WITH H2O IF NECESSARY. ND WELLHEAD AND NU BOP

3. TOOH W/2 3/8" TUBING. RIH W/GAUGE RING TO 2710'. SET CIBP @ 2700'.

4. PU 2 3/8" TUBING & TAG CIBP @ 2700'. LOAD HOLE & PRESS TEST TO 500 PSI.


5. PLUG #1 (PC FRUITLAND) 2700'-2600'. 12-SX. POOH. PERF @ 1480'. SET CIBP @ 1430'.
2528'

6. PLUG #2 (KIRTLAND) 1480'-1380'. 48-SX. (12-SX ABOVE RET & 36-SX BELOW) POOH. PERF @ 294'. ESTABLISH CIRC TO SURFACE.
Ojo Alamo 2821'-2160'

7. PLUG #3 (294' SURFACE) MIX AND PUMP CEMENT UNTIL GOOD RETURNS ARE EVIDENT (APPROXIMATELY 156 SX)
Abandonment plug 831'-731' inside outside 5 1/2" casing.

ND BOP & RD FLOOR. DIG CELLAR AND CUT OFF WELLHEAD. TOP OFF CASING STRINGS AS NEEDED. RD AND MOL. CUT OFF ANCHORS AND INSTALL DRY HOLE MARKER.

PROPOSED WELL BORE DIAGRAM
JICARILLA C #8

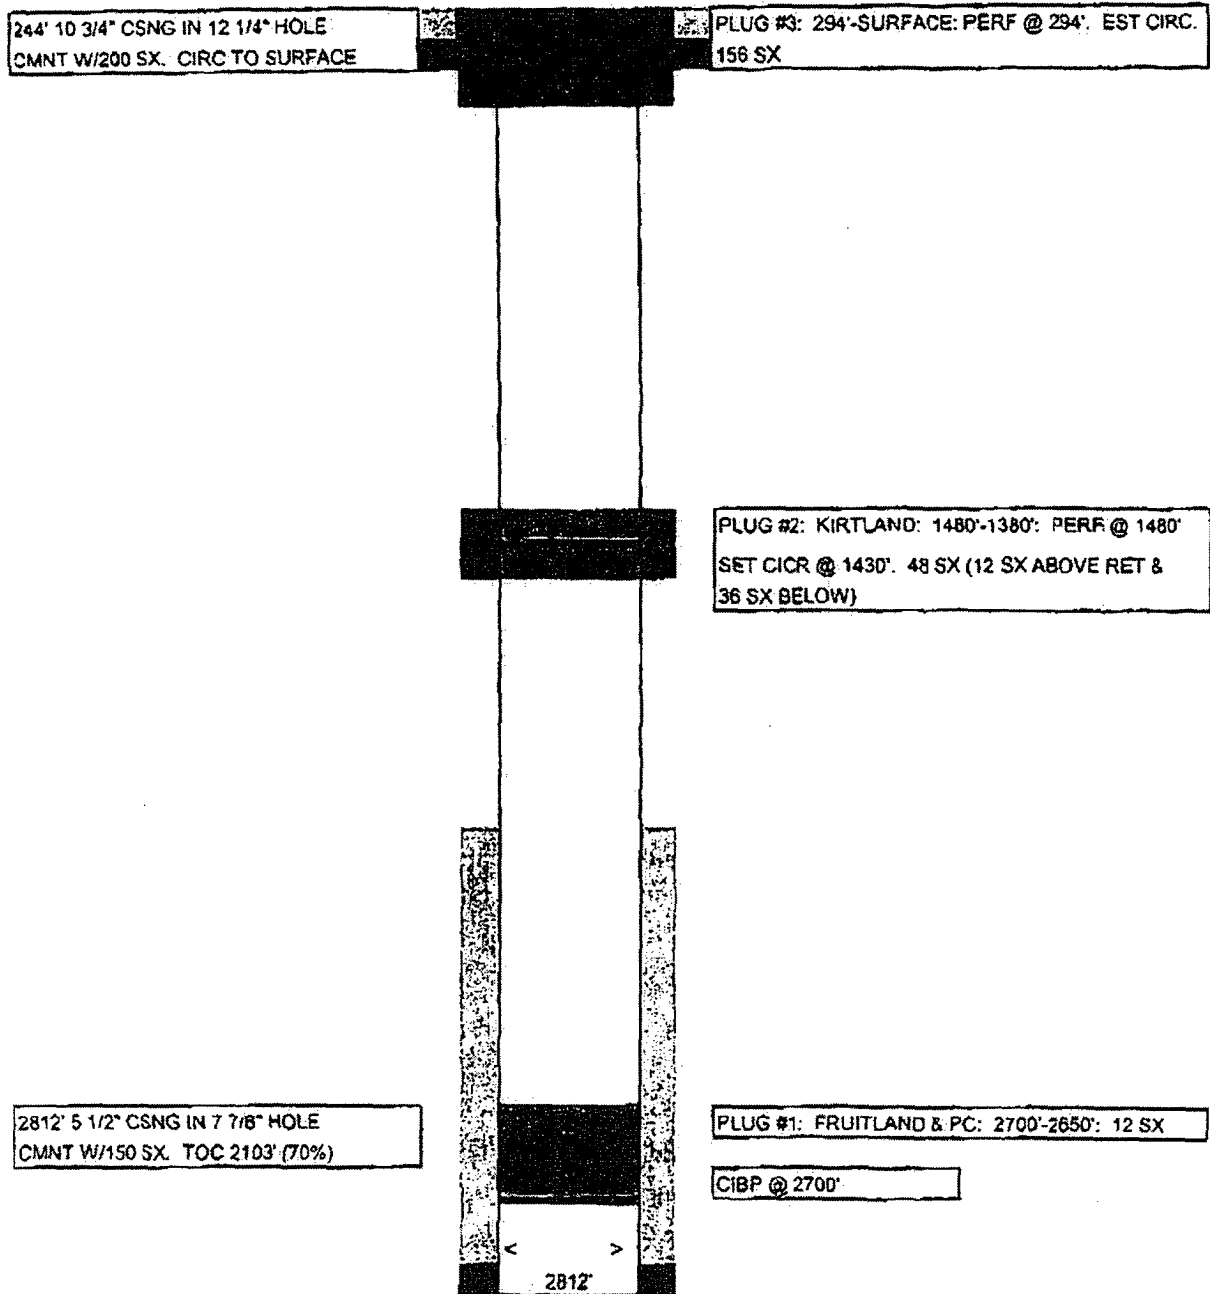

Well Name: Jicarilla C 8

WellView Reports - Schematic - Current

Surface Legit Label/Sec 27-25N-8W	Plate Name	Area	State/Province New Mexico	Location No.	Current Well Status
KB Elevation (ft)	Ground Elevation (ft)	Casing Flange Elevation (ft)	KB-Grnd Distance (ft)	KB-Casing Flange Distance (ft)	Plug Back Total Depth (ft/KB)

Most Recent Job

Original Hole: 12/3/1898 (KB-Grd: 6.0ft)

