

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010**SUNDRY NOTICES AND REPORTS ON WELLS**
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.***SUBMIT IN TRIPLICATE - Other instructions on reverse side.**5. Lease Serial No.
NMSF0781096. If Indian, Allottee or Tribe Name
EASTERN NAVAJO7. If Unit or CA/Agreement, Name and/or No.
892000844F8. Well Name and No.
GALLEGOS CANYON UNIT 2219. API Well No.
30-045-11649-00-S1.10. Field and Pool, or Exploratory
BASIN DAKOTA11. County or Parish, and State
SAN JUAN COUNTY, NM1. Type of Well
☐ Oil Well ☒ Gas Well ☐ Other2. Name of Operator
BP AMERICA PRODUCTION CO Contact: TOYA COLVIN
E-Mail: Toya.Colvin@bp.com3a. Address
200 ENERGY COURT
FARMINGTON, NM 874013b. Phone No. (include area code)
Ph: 281-366-7148

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec 31 T29N R12W SWNE 2445FNL 1690FEL
36.683440 N Lat, 108.136190 W Lon

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input checked="" type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

BP America Production Company respectfully request permission to re-complete into the Pinon Gallup by setting a composite bridge plug over the Basin Dakota, establishing a steady production rate in the Pinon Gallup, then remove the composite bridge plug & downhole commingle with the existing Basin Dakota.

RCVD JUN 27 '13
OIL CONS. DIV.

DIST. 3

The DK(71599) & the Pinon Gallup(50380) pools are pre-approved for DHC per NMOCD Case No. 12520; Order No. R-11567 effective 04/26/2001. Although the interest owners are not identical between these two pools, this same order established approval for subsequent applications for DHC of production in wellbores within the GCU without notice to the unit interest owners. Therefore, no additional notification is required prior to DHC approval.

Production is proposed to be allocated based on the subtraction method using the DK projected

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #211601 verified by the BLM Well Information System
For BP AMERICA PRODUCTION CO, sent to the Farmington
Committed to AFMSS for processing by STEVE MASON on 06/25/2013 (13SXM1539SE)

Name (Printed/Typed) TOYA COLVIN

Title REGULATORY ANALYST

Signature (Electronic Submission)

Date 06/25/2013

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By STEPHEN MASON

Title PETROLEUM ENGINEER

Date 06/25/2013

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office Farmington

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED **

NMOCD

24


Additional data for EC transaction #211601 that would not fit on the form

32. Additional remarks, continued

future decline. That production will serve as a base for production subtracted from the total production for the commingled well. The balance of the production will be attributed to the Pinon Gallup.

Commingling production downhole in the subject well from the proposed pools will not reduce the value of the total remaining production.

Please see attached DHC procedure, wellbore schematics & C-102 plat.



GCU 221

Dakota

API # 30-045-11649

T-29N, R-12-W, Sec. 31

San Juan County, New Mexico

Reason/Background for Job

The proposed work is to re-complete the GCU 221 to Pinon North Gallup trend in the Mancos formation. The proposed work is to isolate the Dakota, perf and frac the Gallup with approx 100,000# of sand in a 70Q foam. Then clean out, re-open the Dakota and set well back on production.

1. Retrieve plunger and stop (if still in well)
2. Set barriers
3. MIRU service rig
4. NU BOP
5. Pull tubing
6. Run bit & scraper; Cleanout
7. Set composite bridge plug to isolate DK
8. MIT wellbore to 1800 psi (maximum expected reservoir pressure 1600 psi)
8. Run logs (CBL & PND)
9. Change out wellhead
10. Perforate Gallup
11. RIH frac string and set packer (if casing MIT indicates issues)
12. Set up frac stack and pressure test
13. Pressure test frac string and packer (if applicable)
14. RDMO
15. Frac Gallup - 70Q N2 foam and \pm 100K # of sand
16. Flowback
17. Install BH gauges for the duration of facilities installation
18. Install facilities
19. MIRU Service Unit
20. Drill out composite plug; Clean out to PBTD
21. Run production tubing and land @ \pm 6125'
22. Run Pump and rods & produce well (DH commingle)

Current WBD



GCU 221

Dakota

API # 30-045-11649

T-29N, R-12-W, Sec. 31

San Juan County, New Mexico

Well History

02/1966 - Spud in
 03/1966 - Complete DK
 04/1969 - Cut paraffin in tubing from 1300' to surface
 10/1969 - Cut paraffin in tubing from 1200' to surface
 11/1969 - Cut paraffin in tubing from 800' to surface
 03/1970 - Cut paraffin in tubing
 10/1970 - Cut paraffin in tubing from 250' to surface
 07/1971 - Cut paraffin in tubing from 760' to surface
 12/1981 - Wirelined. Installed plunger.
 01/1995 - Swabbed well.
 11/2000 - WL - Fish plunger at 5978'. Tag fill at 5979'; broach tubing to 5978'.
 set plunger stop at 5970'
 02/2011 - WL - pull plunger; pull hard up to 1000' pull plunger stop; tag @ 5966'; retrieve what looked like the bottom part of a plunger; Impression block showed a mandrel off a slip stop; Reset plunger stop @ 5953'
 12/2012 - WL - Pull plunger but could not pull stop; stop @ 5940' WLM.

Formation Tops

Pictured Cliffs	1460
Lewis Shales	1650
Mesaverde	3060
Mancos	4,220
Gallup	5130
Base Gallup	5695
Greenhorn	5905
Graneros Shale	5959
Graneros Dakota	6010
Main Dakota	6092


Deviation Data

Depth (ft)	Dev (deg)
347	0.75
764	0.75
1517	0.5
1912	0.5
2552	0.5
2942	0.75
3400	0.5
4041	0.75
4560	0.75
5061	0.75
5436	1
6047	0.75

Plunger stop stuck @ 5952'

EOT @ 6019'

GL 5589'
 KB 5601'

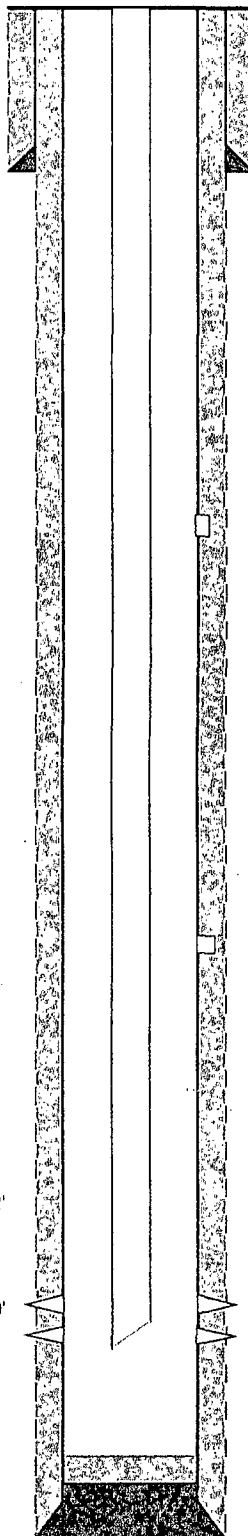

Surface Casing Data

12 1/4" Hole
 8 3/4", 24#, @ 347'
 Cmt w 225 sks
 TOC @ surf

DV Tool @ 1696'

Tubing Details

2 3/4", EOT @ 6019'

DV Tool @ 4288'

Perforation Data - Dakota

6013 - 6028'; 6044 - 6053'
 frac w 48 K gals wr, 40K # snd
 6098 - 6118' & 6132 - 6142'
 Frac w 56,440 gals wr, 50,000# snd

Production Casing Data

7 1/2" Hole
 4 1/2", 10.50#, @ 6193'
 Cmt: 1st stage w 500 sx
 2nd stage: 550 sx
 3rd stage: 450 sx
 TOC @ surf

Final WBD



GCU 221
Dakota
API # 30-045-11649
T-29N, R-12-W, Sec. 31
San Juan County, New Mexico

Well History

02/1966 - Spud in
03/1966 - Complete DK
04/1969 - Cut paraffin in tubing from 1300' to surface
10/1969 - Cut paraffin in tubing from 1200' to surface
11/1969 - Cut paraffin in tubing from 800' to surface
03/1970 - Cut paraffin in tubing
10/1970 - Cut paraffin in tubing from 250' to surface
07/1971 - Cut paraffin in tubing from 760' to surface
12/1981 - Wirelined. Installed plunger.
01/1995 - Swabbed well.
11/2000 - WL - Fish plunger at 5978'. Tag fill
at 5979'; broach tubing to 5978'.
set plunger stop at 5970'
02/2011 - WL - pull plunger; pull hard up to 1000'
pull plunger stop; tag @ 5966'; retrieve what looked like the
bottom part of a plunger; Impression block showed
a mandrel off a slip stop; Reset plunger stop @ 5953'
12/2012 - WL - Pull plunger but could not pull stop;
stop @ 5940' WLM


Formation Tops	
Pictured Cliffs	1460
Lewis Shales	1650
Mesaverde	3060
Mancos	4,220
Gallup	5130
Base Gallup	5695
Greenhorn	5905
Graneros Shale	5959
Graneros Dakota	6010
Main Dakota	6092

Deviation Data	
Depth (ft)	Dev (deg)
347	0.75
764	0.75
1517	0.5
1912	0.5
2552	0.5
2942	0.75
3400	0.5
4041	0.75
4560	0.75
5061	0.75
5436	1
6047	0.75

F Nipple @ 6103' ±

EOT @ 6125' ±

GL 5589'
KB 5601'

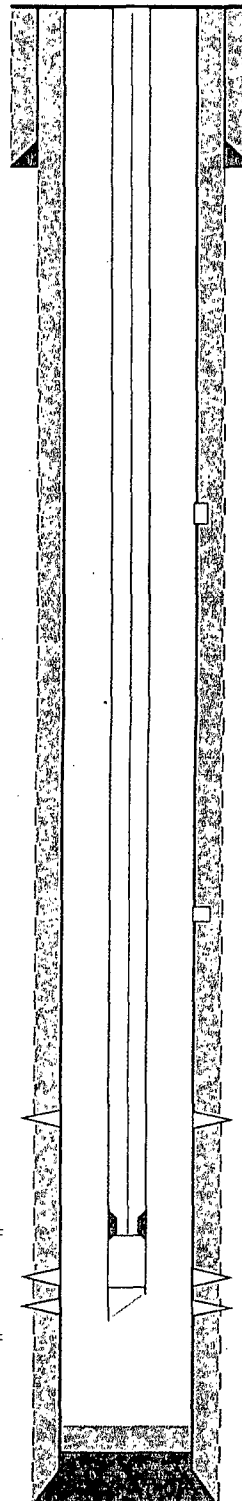

Surface Casing Data

12 1/4" Hole
8 3/4", 24#, @ 347'
Cmt w/ 225 sks
TOC @ surf

Tubing Details

MS 2 3/4", 4.7#, J55 x 20' ±
F nipple 2 3/4" x 1.78"
Tbg 2 3/4", 4.7#, J55 EUE

DV Tool @ 1696'

Rod Details

Pump 2" x 1 1/2" x 16' RHAC
Sinker bars 1 1/4" x 200' ±
Rods 3/4" grd D x 1275' ±
Rods 1/2" grd D, slim hole cpl x 1575' ±
Fiber rod 1" x 3045' ±
Polished rod 1 1/2" x 26' ±

DV Tool @ 4288'

Proposed Perfs - Gallup

5554 - 5570'

Perforation Data - Dakota

6013 - 6028'; 6044 - 6053'
frac w/ 48 K gals wr, 40K # snd
6098 - 6118' & 6132 - 6142'
Frac w/ 56,440 gals wr, 50,000# snd

Production Casing Data

7 1/4" Hole
4 1/2", 10.50#, @ 6193'
Cmt: 1st stage w/ 500 sx
2nd stage: 550 sx
3rd stage: 450 sx
TOC @ surf

PBDT: 6159'
TD: 6193'

District

1625 N. French Dr., Hobbs, NM 88240

10/10/11

1301 W. Grand Avenue, Artesia, NM 88210

District 1113

1000 Rio Arroyo Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico

Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION

1220 South St. Francis Dr

Santa Fe, NM 87505

Form C-102

Revised July 16, 2010

Submit one copy to appropriate

District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

* API Number 30-045-11649		* Pool Code 71599 & 50380		* Pool Name Basin Dakota & Pinon Gallup	
* Property Code 000570		* Property Name Gallegos Canyon Unit			* Well Number 221
* OGRID No. 000778		* Operator Name BP America Production Company			* Elevation 5589

10 Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
G	31	29N	12W		2445	North	1690	East	San Juan


Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line
---------------	---------	----------	-------	---------	---------------	------------------	---------------	----------------

¹² Dedicated Acres 80	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. R-11567
-------------------------------------	-------------------------------	----------------------------------	------------------------------------

RCVD JUN 27 '13
OIL CONS. DIV.
DIST. 3

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

16.		<p align="center">OPERATOR CERTIFICATION</p> <p><i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this representation either asserts a mining interest or undivided mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with no consideration of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order hereinafter created by the division.</i></p> <p style="text-align: center;">  4/25/13 </p> <hr/> <p>Signature _____ Date _____</p> <hr/> <p>Tony Colvin Printed Name</p> <hr/> <p>Tony.Colvin@dnr.com E-mail Address</p>
17.	<div style="border: 1px solid black; width: 100px; height: 100px; margin: auto; position: relative;"> 2445' 1690' </div>	<p align="center">18. SURVEYOR CERTIFICATION</p> <p><i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i></p> <hr/> <p>Date of Survey _____</p> <p>Signature and Seal of Professional Surveyor _____</p> <hr/> <p align="right">Previously Filed _____</p> <hr/> <p>Certificate Number _____</p>