

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: July 31, 2010

RECEIVED

**SUNDRY NOTICES AND REPORTS ON WELLS**  
**Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.**

**SUBMIT IN TRIPLICATE** - Other instructions on page 2

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator  
Encana Oil & Gas (USA) Inc.

3a. Address  
370 17th Street, Suite 1700  
Denver CO, 80202

3b. Phone No. (include area code)  
720-876-5331

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
SHL: 287' FSL, 862' FEL Section 36, T24N R10W  
BHL: 330' FSL, 430' FEL Section 1, T23N R10W

5. Lease/Serial No.  
NM-42059

6. If Indian, Allottee or Tribe Name  
N/A

7. If Unit of CA/Agreement, Name and/or No.  
N/A

8. Well Name and No.  
Good Times P36A-2410 03H

9. API Well No.  
30-045-35450

10. Field and Pool or Exploratory Area  
South Bisti-Gallup

11. Country or Parish, State  
San Juan, NM

OIL CONS. DIV DIST. 3

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

JUN 27 2014

| TYPE OF SUBMISSION                                   | TYPE OF ACTION                                   |                                           |                                                    |                                         |
|------------------------------------------------------|--------------------------------------------------|-------------------------------------------|----------------------------------------------------|-----------------------------------------|
| <input checked="" type="checkbox"/> Notice of Intent | <input type="checkbox"/> Acidize                 | <input type="checkbox"/> Deepen           | <input type="checkbox"/> Production (Start/Resume) | <input type="checkbox"/> Water Shut-Off |
| <input type="checkbox"/> Subsequent Report           | <input type="checkbox"/> Alter Casing            | <input type="checkbox"/> Fracture Treat   | <input type="checkbox"/> Reclamation               | <input type="checkbox"/> Well Integrity |
| <input type="checkbox"/> Final Abandonment Notice    | <input type="checkbox"/> Casing Repair           | <input type="checkbox"/> New Construction | <input type="checkbox"/> Recomplete                | <input type="checkbox"/> Other          |
|                                                      | <input checked="" type="checkbox"/> Change Plans | <input type="checkbox"/> Plug and Abandon | <input type="checkbox"/> Temporarily Abandon       |                                         |
|                                                      | <input type="checkbox"/> Convert to Injection    | <input type="checkbox"/> Plug Back        | <input type="checkbox"/> Water Disposal            |                                         |

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

Encana Oil & Gas (USA) Inc. (Encana) would like to notify the BLM and OCD that adequate build rates were not able to be achieved during the initial attempt to drill the approved Good Times P36A-2410 03H wellbore. Sufficient build rates were still not achieved when the initial BHA was replaced with a higher bend motor. Therefore, Encana proceeded with the plug back and sidetrack procedure verbally approved by the BLM (6/21/2014) and in accordance with OCD requirements. A 600' cement plug was spotted from TD (4951') with a 200' spacer and a second 600' cement plug was spotted above the spacer. The two plugs isolate both the contact between the Gallup to the Mancos and the Mancos to the Point Lookout. Kick off of the plug was at 3657'. The sidetrack was successfully drilled to 7" ICP.

The 7" casing point and POE will both be similar to the permitted plan in relation to the section line and 330' setback. 7" is planned to be set at approximately 230' FNL. The last completion packer will be set on the legal side of the 300' setback. The BHL will remain the same as approved (330 FSL, 430 FEL Sec 1 T23N R10W).

Please find attached an updated Directional Drilling Plan, which reflects this change of plans.

**CONDITIONS OF APPROVAL**

Adhere to previously issued stipulations

**BLM'S APPROVAL OR ACCEPTANCE OF THIS ACTION DOES NOT RELIEVE THE LESSEE AND OPERATOR FROM OBTAINING ANY OTHER AUTHORIZATION REQUIRED FOR OPERATIONS ON FEDERAL AND INDIAN LANDS**

14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed)  
Katie Wegner

Title Regulatory Analyst

Signature

Date 06/24/2014

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by

William Tambekou

Petroleum Engineer

Date 6/25/2014

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office FFD

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

NMOCDA




Project: San Juan County, NM  
Site: S36-T24N-R10W (Good Times)  
Well: Good Times P36A-2410 03H  
Wellbore: STK  
Design: Plan #3



#### SECTION DETAILS

| Sec | MD     | Inc   | Azi    | TVD    | +N/-S   | +E/-W | Dleg  | TFace  | VSec   | Target                           |
|-----|--------|-------|--------|--------|---------|-------|-------|--------|--------|----------------------------------|
| 1   | 4271.0 | 17.20 | 120.90 | 4238.3 | -47.8   | 252.6 | 0.00  | 0.00   | 48.5   |                                  |
| 2   | 4319.0 | 19.30 | 130.70 | 4283.9 | -56.7   | 264.7 | 7.73  | 60.34  | 57.4   |                                  |
| 3   | 4353.2 | 22.41 | 125.77 | 4315.9 | -64.2   | 274.3 | 10.43 | -31.78 | 64.9   |                                  |
| 4   | 5212.5 | 90.90 | 179.85 | 4780.2 | -688.9  | 433.6 | 9.07  | 55.90  | 690.0  | Good Times P36A-2410 03H LP      |
| 5   | 9762.5 | 90.90 | 179.85 | 4708.6 | -5238.3 | 445.2 | 0.00  | 0.00   | 5239.4 | Good Times P36A-2410 03H PBHL P7 |

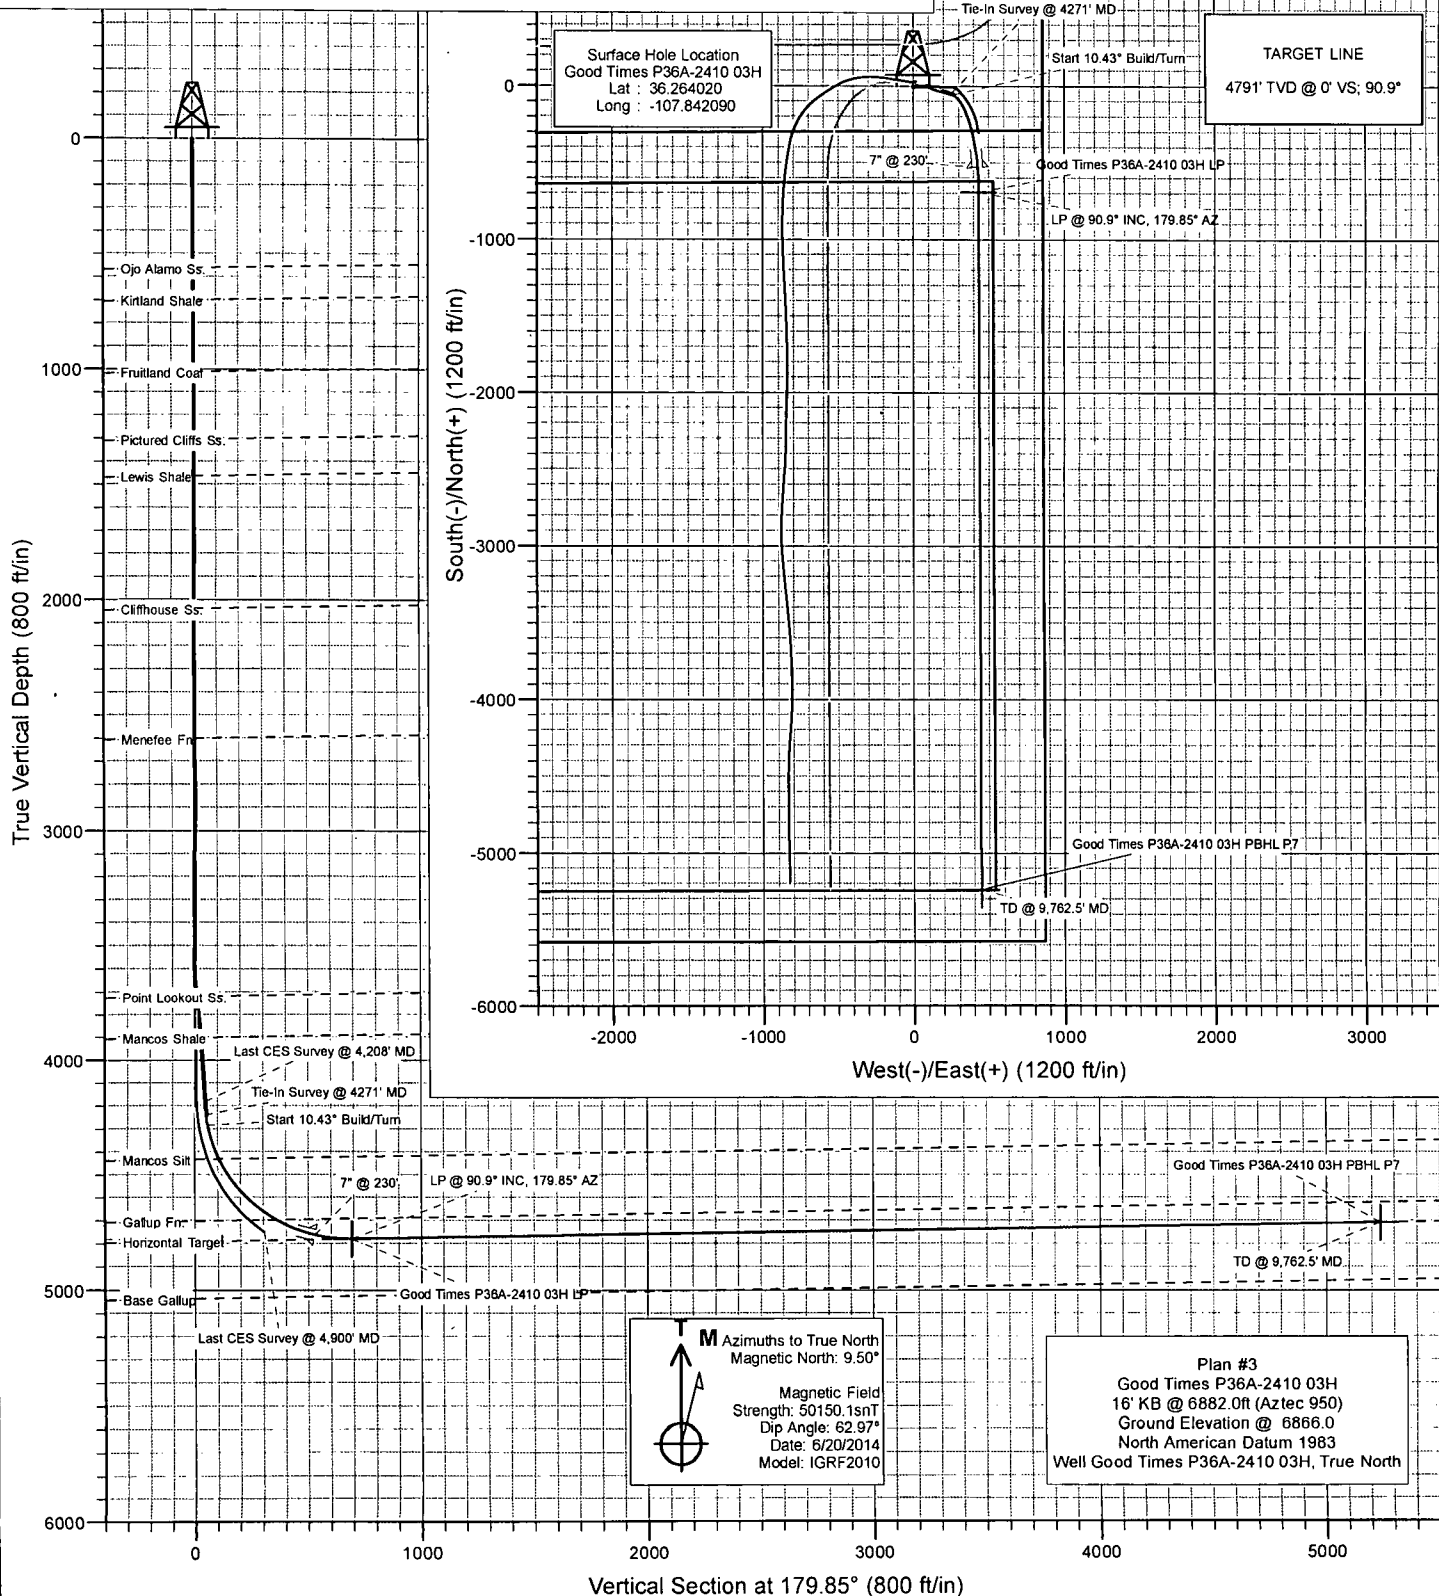

# Planning Report

|                  |                             |                                     |                               |
|------------------|-----------------------------|-------------------------------------|-------------------------------|
| <b>Database:</b> | USA EDM 5000 Multi Users DB | <b>Local Co-ordinate Reference:</b> | Well Good Times P36A-2410 03H |
| <b>Company:</b>  | EnCana Oil & Gas (USA) Inc  | <b>TVD Reference:</b>               | 16' KB @ 6882.0ft (Aztec 950) |
| <b>Project:</b>  | San Juan County, NM         | <b>MD Reference:</b>                | 16' KB @ 6882.0ft (Aztec 950) |
| <b>Site:</b>     | S36-T24N-R10W (Good Times)  | <b>North Reference:</b>             | True                          |
| <b>Well:</b>     | Good Times P36A-2410 03H    | <b>Survey Calculation Method:</b>   | Minimum Curvature             |
| <b>Wellbore:</b> | STK                         |                                     |                               |
| <b>Design:</b>   | Plan #3                     |                                     |                               |

|                    |                           |                      |                |
|--------------------|---------------------------|----------------------|----------------|
| <b>Project</b>     | San Juan County, NM       |                      |                |
| <b>Map System:</b> | US State Plane 1983       | <b>System Datum:</b> | Mean Sea Level |
| <b>Geo Datum:</b>  | North American Datum 1983 |                      |                |
| <b>Map Zone:</b>   | New Mexico Western Zone   |                      |                |

|                       |          |                            |                 |                   |             |
|-----------------------|----------|----------------------------|-----------------|-------------------|-------------|
| Site                  |          | S36-T24N-R10W (Good Times) |                 |                   |             |
| Site Position:        |          | Northing:                  | 1,937,831.40 ft | Latitude:         | 36.325610   |
| From:                 | Lat/Long | Easting:                   | 2,706,101.56 ft | Longitude:        | -107.891030 |
| Position Uncertainty: | 0.0 ft   | Slot Radius:               | 13.200 in       | Grid Convergence: | -0.03 °     |

|                      |                          |        |                     |                 |               |             |
|----------------------|--------------------------|--------|---------------------|-----------------|---------------|-------------|
| Well                 | Good Times P36A-2410 03H |        |                     |                 |               |             |
| Well Position        | +N/-S                    | 0.0 ft | Northing:           | 1,915,406.07 ft | Latitude:     | 36.264020   |
|                      | +E/-W                    | 0.0 ft | Easting:            | 2,720,515.66 ft | Longitude:    | -107.842090 |
| Position Uncertainty |                          | 0.0 ft | Wellhead Elevation: | ft              | Ground Level: | 6,866.0 ft  |

|                  |                   |                    |                    |                  |                       |
|------------------|-------------------|--------------------|--------------------|------------------|-----------------------|
| <b>Wellbore</b>  | STK               |                    |                    |                  |                       |
| <b>Magnetics</b> | <b>Model Name</b> | <b>Sample Date</b> | <b>Declination</b> | <b>Dip Angle</b> | <b>Field Strength</b> |
|                  |                   |                    | (°)                | (°)              | (nT)                  |
|                  | IGRF2010          | 6/20/2014          | 9.50               | 62.97            | 50,150                |

|                          |                         |              |                      |                  |
|--------------------------|-------------------------|--------------|----------------------|------------------|
| <b>Design</b>            | Plan #3                 |              |                      |                  |
| <b>Audit Notes:</b>      |                         |              |                      |                  |
| <b>Version:</b>          | <b>Phase:</b>           | PLAN         | <b>Tie On Depth:</b> | 4,271.0          |
| <b>Vertical Section:</b> | <b>Depth From (TVD)</b> | <b>+N/-S</b> | <b>+E/-W</b>         | <b>Direction</b> |
|                          | (ft)                    | (ft)         | (ft)                 | (°)              |
|                          | 0.0                     | 0.0          | 0.0                  | 179.85           |

|                      |                    |                |                 |              |              |                  |                  |                  |            |                    |
|----------------------|--------------------|----------------|-----------------|--------------|--------------|------------------|------------------|------------------|------------|--------------------|
| <b>Plan Sections</b> |                    |                |                 |              |              |                  |                  |                  |            |                    |
| <b>Measured</b>      | <b>Inclination</b> | <b>Azimuth</b> | <b>Vertical</b> | <b>+N/-S</b> | <b>+E/-W</b> | <b>Dogleg</b>    | <b>Build</b>     | <b>Turn</b>      | <b>TFO</b> | <b>Target</b>      |
| <b>Depth</b>         | <b>(°)</b>         | <b>(°)</b>     | <b>Depth</b>    | <b>(ft)</b>  | <b>(ft)</b>  | <b>Rate</b>      | <b>Rate</b>      | <b>Rate</b>      | <b>(°)</b> |                    |
| <b>(ft)</b>          |                    |                | <b>(ft)</b>     |              |              | <b>(°/100ft)</b> | <b>(°/100ft)</b> | <b>(°/100ft)</b> |            |                    |
| 4,271.0              | 17.20              | 120.90         | 4,238.3         | -47.8        | 252.6        | 0.00             | 0.00             | 0.00             | 0.00       |                    |
| 4,319.0              | 19.30              | 130.70         | 4,283.9         | -56.7        | 264.7        | 7.73             | 4.37             | 20.42            | 60.34      |                    |
| 4,353.2              | 22.41              | 125.77         | 4,315.9         | -64.2        | 274.3        | 10.43            | 9.08             | -14.41           | -31.78     |                    |
| 5,212.5              | 90.90              | 179.85         | 4,780.2         | -688.9       | 433.6        | 9.07             | 7.97             | 6.29             | 55.90      | Good Times P36A-24 |
| 9,762.5              | 90.90              | 179.85         | 4,708.6         | -5,238.3     | 445.2        | 0.00             | 0.00             | 0.00             | 0.00       | Good Times P36A-24 |

# Planning Report

|                  |                             |                                     |                               |
|------------------|-----------------------------|-------------------------------------|-------------------------------|
| <b>Database:</b> | USA EDM 5000 Multi Users DB | <b>Local Co-ordinate Reference:</b> | Well Good Times P36A-2410 03H |
| <b>Company:</b>  | EnCana Oil & Gas (USA) Inc  | <b>TVD Reference:</b>               | 16' KB @ 6882.0ft (Aztec 950) |
| <b>Project:</b>  | San Juan County, NM         | <b>MD Reference:</b>                | 16' KB @ 6882.0ft (Aztec 950) |
| <b>Site:</b>     | S36-T24N-R10W (Good Times)  | <b>North Reference:</b>             | True                          |
| <b>Well:</b>     | Good Times P36A-2410 03H    | <b>Survey Calculation Method:</b>   | Minimum Curvature             |
| <b>Wellbore:</b> | STK                         |                                     |                               |
| <b>Design:</b>   | Plan #3                     |                                     |                               |

| Planned Survey      |                 |             |                     |            |            |                       |                       |                      |                            |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|----------------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Comments / Formations      |
| 4,271.0             | 17.20           | 120.90      | 4,238.3             | -47.8      | 252.6      | 48.5                  | 0.00                  | 0.00                 | Tie-In Survey @ 4271' MD   |
| 4,300.0             | 18.41           | 127.08      | 4,265.9             | -52.8      | 259.9      | 53.5                  | 7.73                  | 4.17                 |                            |
| 4,319.0             | 19.30           | 130.70      | 4,283.9             | -56.7      | 264.7      | 57.4                  | 7.73                  | 4.68                 | Start 10.43° Build/Turn    |
| 4,353.2             | 22.41           | 125.77      | 4,315.9             | -64.2      | 274.3      | 64.9                  | 10.43                 | 9.08                 |                            |
| 4,400.0             | 25.02           | 134.10      | 4,358.7             | -76.3      | 288.6      | 77.0                  | 9.07                  | 5.59                 |                            |
| 4,450.0             | 28.23           | 141.27      | 4,403.4             | -92.9      | 303.6      | 93.7                  | 9.07                  | 6.42                 |                            |
| 4,480.9             | 30.37           | 144.96      | 4,430.3             | -104.9     | 312.7      | 105.8                 | 9.07                  | 6.93                 | Mancos Silt                |
| 4,500.0             | 31.74           | 147.02      | 4,446.7             | -113.1     | 318.2      | 114.0                 | 9.07                  | 7.17                 |                            |
| 4,550.0             | 35.46           | 151.71      | 4,488.4             | -136.9     | 332.2      | 137.8                 | 9.07                  | 7.44                 |                            |
| 4,600.0             | 39.33           | 155.61      | 4,528.1             | -164.2     | 345.6      | 165.1                 | 9.07                  | 7.74                 |                            |
| 4,650.0             | 43.32           | 158.90      | 4,565.6             | -194.6     | 358.4      | 195.5                 | 9.07                  | 7.96                 |                            |
| 4,700.0             | 47.38           | 161.73      | 4,600.8             | -228.1     | 370.3      | 229.1                 | 9.07                  | 8.13                 |                            |
| 4,750.0             | 51.50           | 164.21      | 4,633.3             | -264.4     | 381.4      | 265.4                 | 9.07                  | 8.25                 |                            |
| 4,800.0             | 55.67           | 166.43      | 4,663.0             | -303.3     | 391.6      | 304.4                 | 9.07                  | 8.34                 |                            |
| 4,850.0             | 59.88           | 168.43      | 4,689.6             | -344.6     | 400.8      | 345.7                 | 9.07                  | 8.41                 |                            |
| 4,863.8             | 61.04           | 168.95      | 4,696.4             | -356.3     | 403.1      | 357.4                 | 9.07                  | 8.45                 | Gallup Fn.                 |
| 4,900.0             | 64.12           | 170.27      | 4,713.1             | -388.0     | 408.9      | 389.1                 | 9.07                  | 8.48                 |                            |
| 4,950.0             | 68.37           | 171.98      | 4,733.2             | -433.2     | 416.0      | 434.3                 | 9.07                  | 8.51                 |                            |
| 5,000.0             | 72.65           | 173.59      | 4,749.9             | -479.9     | 421.9      | 481.0                 | 9.07                  | 8.55                 |                            |
| 5,049.2             | 76.86           | 175.10      | 4,762.8             | -527.2     | 426.6      | 528.3                 | 9.07                  | 8.57                 | 7" @ 230'                  |
| 5,050.0             | 76.93           | 175.12      | 4,763.0             | -527.9     | 426.6      | 529.1                 | 9.07                  | 8.58                 |                            |
| 5,100.0             | 81.23           | 176.61      | 4,772.5             | -576.9     | 430.2      | 578.0                 | 9.07                  | 8.59                 |                            |
| 5,150.0             | 85.53           | 178.06      | 4,778.2             | -626.5     | 432.5      | 627.6                 | 9.07                  | 8.60                 |                            |
| 5,200.0             | 89.83           | 179.50      | 4,780.3             | -676.4     | 433.5      | 677.6                 | 9.07                  | 8.61                 |                            |
| 5,205.5             | 90.30           | 179.65      | 4,780.3             | -681.9     | 433.6      | 683.0                 | 9.07                  | 8.61                 | Horizontal Target          |
| 5,212.5             | 90.90           | 179.85      | 4,780.2             | -688.9     | 433.6      | 690.1                 | 9.04                  | 8.58                 | LP @ 90.9° INC, 179.85° AZ |
| 5,300.0             | 90.90           | 179.85      | 4,778.8             | -776.4     | 433.8      | 777.5                 | 0.00                  | 0.00                 |                            |
| 5,400.0             | 90.90           | 179.85      | 4,777.2             | -876.4     | 434.1      | 877.5                 | 0.00                  | 0.00                 |                            |
| 5,500.0             | 90.90           | 179.85      | 4,775.7             | -976.4     | 434.3      | 977.5                 | 0.00                  | 0.00                 |                            |
| 5,600.0             | 90.90           | 179.85      | 4,774.1             | -1,076.4   | 434.6      | 1,077.5               | 0.00                  | 0.00                 |                            |
| 5,700.0             | 90.90           | 179.85      | 4,772.5             | -1,176.4   | 434.8      | 1,177.5               | 0.00                  | 0.00                 |                            |
| 5,800.0             | 90.90           | 179.85      | 4,771.0             | -1,276.3   | 435.1      | 1,277.5               | 0.00                  | 0.00                 |                            |
| 5,900.0             | 90.90           | 179.85      | 4,769.4             | -1,376.3   | 435.4      | 1,377.5               | 0.00                  | 0.00                 |                            |
| 6,000.0             | 90.90           | 179.85      | 4,767.8             | -1,476.3   | 435.6      | 1,477.5               | 0.00                  | 0.00                 |                            |
| 6,100.0             | 90.90           | 179.85      | 4,766.2             | -1,576.3   | 435.9      | 1,577.4               | 0.00                  | 0.00                 |                            |
| 6,200.0             | 90.90           | 179.85      | 4,764.7             | -1,676.3   | 436.1      | 1,677.4               | 0.00                  | 0.00                 |                            |
| 6,300.0             | 90.90           | 179.85      | 4,763.1             | -1,776.3   | 436.4      | 1,777.4               | 0.00                  | 0.00                 |                            |
| 6,400.0             | 90.90           | 179.85      | 4,761.5             | -1,876.3   | 436.6      | 1,877.4               | 0.00                  | 0.00                 |                            |
| 6,500.0             | 90.90           | 179.85      | 4,759.9             | -1,976.3   | 436.9      | 1,977.4               | 0.00                  | 0.00                 |                            |
| 6,600.0             | 90.90           | 179.85      | 4,758.4             | -2,076.2   | 437.1      | 2,077.4               | 0.00                  | 0.00                 |                            |
| 6,700.0             | 90.90           | 179.85      | 4,756.8             | -2,176.2   | 437.4      | 2,177.4               | 0.00                  | 0.00                 |                            |
| 6,800.0             | 90.90           | 179.85      | 4,755.2             | -2,276.2   | 437.7      | 2,277.4               | 0.00                  | 0.00                 |                            |
| 6,900.0             | 90.90           | 179.85      | 4,753.6             | -2,376.2   | 437.9      | 2,377.3               | 0.00                  | 0.00                 |                            |
| 7,000.0             | 90.90           | 179.85      | 4,752.1             | -2,476.2   | 438.2      | 2,477.3               | 0.00                  | 0.00                 |                            |
| 7,100.0             | 90.90           | 179.85      | 4,750.5             | -2,576.2   | 438.4      | 2,577.3               | 0.00                  | 0.00                 |                            |
| 7,200.0             | 90.90           | 179.85      | 4,748.9             | -2,676.2   | 438.7      | 2,677.3               | 0.00                  | 0.00                 |                            |
| 7,300.0             | 90.90           | 179.85      | 4,747.4             | -2,776.2   | 438.9      | 2,777.3               | 0.00                  | 0.00                 |                            |
| 7,400.0             | 90.90           | 179.85      | 4,745.8             | -2,876.1   | 439.2      | 2,877.3               | 0.00                  | 0.00                 |                            |
| 7,500.0             | 90.90           | 179.85      | 4,744.2             | -2,976.1   | 439.4      | 2,977.3               | 0.00                  | 0.00                 |                            |
| 7,600.0             | 90.90           | 179.85      | 4,742.6             | -3,076.1   | 439.7      | 3,077.3               | 0.00                  | 0.00                 |                            |
| 7,700.0             | 90.90           | 179.85      | 4,741.1             | -3,176.1   | 440.0      | 3,177.2               | 0.00                  | 0.00                 |                            |
| 7,800.0             | 90.90           | 179.85      | 4,739.5             | -3,276.1   | 440.2      | 3,277.2               | 0.00                  | 0.00                 |                            |

# Planning Report

|                  |                             |                                     |                               |
|------------------|-----------------------------|-------------------------------------|-------------------------------|
| <b>Database:</b> | USA EDM 5000 Multi Users DB | <b>Local Co-ordinate Reference:</b> | Well Good Times P36A-2410 03H |
| <b>Company:</b>  | EnCana Oil & Gas (USA) Inc  | <b>TVD Reference:</b>               | 16' KB @ 6882.0ft (Aztec 950) |
| <b>Project:</b>  | San Juan County, NM         | <b>MD Reference:</b>                | 16' KB @ 6882.0ft (Aztec 950) |
| <b>Site:</b>     | S36-T24N-R10W (Good Times)  | <b>North Reference:</b>             | True                          |
| <b>Well:</b>     | Good Times P36A-2410 03H    | <b>Survey Calculation Method:</b>   | Minimum Curvature             |
| <b>Wellbore:</b> | STK                         |                                     |                               |
| <b>Design:</b>   | Plan #3                     |                                     |                               |

| Planned Survey      |                 |             |                     |            |            |                       |                       |                      |                       |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|-----------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Comments / Formations |
| 7,900.0             | 90.90           | 179.85      | 4,737.9             | -3,376.1   | 440.5      | 3,377.2               | 0.00                  | 0.00                 |                       |
| 8,000.0             | 90.90           | 179.85      | 4,736.3             | -3,476.1   | 440.7      | 3,477.2               | 0.00                  | 0.00                 |                       |
| 8,100.0             | 90.90           | 179.85      | 4,734.8             | -3,576.1   | 441.0      | 3,577.2               | 0.00                  | 0.00                 |                       |
| 8,200.0             | 90.90           | 179.85      | 4,733.2             | -3,676.0   | 441.2      | 3,677.2               | 0.00                  | 0.00                 |                       |
| 8,300.0             | 90.90           | 179.85      | 4,731.6             | -3,776.0   | 441.5      | 3,777.2               | 0.00                  | 0.00                 |                       |
| 8,400.0             | 90.90           | 179.85      | 4,730.0             | -3,876.0   | 441.7      | 3,877.2               | 0.00                  | 0.00                 |                       |
| 8,500.0             | 90.90           | 179.85      | 4,728.5             | -3,976.0   | 442.0      | 3,977.1               | 0.00                  | 0.00                 |                       |
| 8,600.0             | 90.90           | 179.85      | 4,726.9             | -4,076.0   | 442.3      | 4,077.1               | 0.00                  | 0.00                 |                       |
| 8,700.0             | 90.90           | 179.85      | 4,725.3             | -4,176.0   | 442.5      | 4,177.1               | 0.00                  | 0.00                 |                       |
| 8,800.0             | 90.90           | 179.85      | 4,723.7             | -4,276.0   | 442.8      | 4,277.1               | 0.00                  | 0.00                 |                       |
| 8,900.0             | 90.90           | 179.85      | 4,722.2             | -4,376.0   | 443.0      | 4,377.1               | 0.00                  | 0.00                 |                       |
| 9,000.0             | 90.90           | 179.85      | 4,720.6             | -4,475.9   | 443.3      | 4,477.1               | 0.00                  | 0.00                 |                       |
| 9,100.0             | 90.90           | 179.85      | 4,719.0             | -4,575.9   | 443.5      | 4,577.1               | 0.00                  | 0.00                 |                       |
| 9,200.0             | 90.90           | 179.85      | 4,717.5             | -4,675.9   | 443.8      | 4,677.1               | 0.00                  | 0.00                 |                       |
| 9,300.0             | 90.90           | 179.85      | 4,715.9             | -4,775.9   | 444.0      | 4,777.0               | 0.00                  | 0.00                 |                       |
| 9,400.0             | 90.90           | 179.85      | 4,714.3             | -4,875.9   | 444.3      | 4,877.0               | 0.00                  | 0.00                 |                       |
| 9,500.0             | 90.90           | 179.85      | 4,712.7             | -4,975.9   | 444.6      | 4,977.0               | 0.00                  | 0.00                 |                       |
| 9,600.0             | 90.90           | 179.85      | 4,711.2             | -5,075.9   | 444.8      | 5,077.0               | 0.00                  | 0.00                 |                       |
| 9,700.0             | 90.90           | 179.85      | 4,709.6             | -5,175.9   | 445.1      | 5,177.0               | 0.00                  | 0.00                 |                       |
| 9,762.5             | 90.90           | 179.85      | 4,708.6             | -5,238.3   | 445.2      | 5,239.4               | 0.00                  | 0.00                 | TD @ 9,762.5' MD      |

| Targets                                                                             |               |              |          |            |            |               |              |           |             |
|-------------------------------------------------------------------------------------|---------------|--------------|----------|------------|------------|---------------|--------------|-----------|-------------|
| Target Name                                                                         | Dip Angle (°) | Dip Dir. (°) | TVD (ft) | +N/-S (ft) | +E/-W (ft) | Northing (ft) | Easting (ft) | Latitude  | Longitude   |
| Good Times P36A-2410<br>- hit/miss target<br>- Shape<br>- Point                     | 0.00          | 0.00         | 4,781.4  | -611.6     | 433.4      | 1,914,794.47  | 2,720,948.97 | 36.262340 | -107.840620 |
| - plan misses target center by 4.7ft at 5135.6ft MD (4777.0 TVD, -612.1 N, 431.9 E) |               |              |          |            |            |               |              |           |             |
| Good Times P36A-2410<br>- plan hits target center<br>- Point                        | 0.00          | 0.00         | 4,780.2  | -688.9     | 433.6      | 1,914,717.13  | 2,720,949.19 | 36.262128 | -107.840619 |
| Good Times P36A-2410<br>- plan hits target center<br>- Point                        | 0.00          | 0.00         | 4,708.6  | -5,238.3   | 445.2      | 1,910,167.72  | 2,720,960.41 | 36.249630 | -107.840580 |

| Casing Points       |                     |           |                      |                    |  |
|---------------------|---------------------|-----------|----------------------|--------------------|--|
| Measured Depth (ft) | Vertical Depth (ft) | Name      | Casing Diameter (in) | Hole Diameter (in) |  |
| 5,049.2             | 4,762.8             | 7" @ 230' | 0.000                | 0.000              |  |

# Planning Report

|                  |                             |                                     |                               |
|------------------|-----------------------------|-------------------------------------|-------------------------------|
| <b>Database:</b> | USA EDM 5000 Multi Users DB | <b>Local Co-ordinate Reference:</b> | Well Good Times P36A-2410 03H |
| <b>Company:</b>  | EnCana Oil & Gas (USA) Inc  | <b>TVD Reference:</b>               | 16' KB @ 6882.0ft (Aztec 950) |
| <b>Project:</b>  | San Juan County, NM         | <b>MD Reference:</b>                | 16' KB @ 6882.0ft (Aztec 950) |
| <b>Site:</b>     | S36-T24N-R10W (Good Times)  | <b>North Reference:</b>             | True                          |
| <b>Well:</b>     | Good Times P36A-2410 03H    | <b>Survey Calculation Method:</b>   | Minimum Curvature             |
| <b>Wellbore:</b> | STK                         |                                     |                               |
| <b>Design:</b>   | Plan #3                     |                                     |                               |

| Formations          |                     |                   |           |         |                   |
|---------------------|---------------------|-------------------|-----------|---------|-------------------|
| Measured Depth (ft) | Vertical Depth (ft) | Name              | Lithology | Dip (°) | Dip Direction (°) |
| 4,480.9             | 4,432.0             | Mancos Silt       |           | -0.90   | 179.85            |
| 4,863.8             | 4,702.0             | Gallup Fn.        |           | -0.90   | 179.85            |
| 5,205.5             | 4,791.0             | Horizontal Target |           | -0.90   | 179.85            |

| Plan Annotations    |                     |                   |            |                            |
|---------------------|---------------------|-------------------|------------|----------------------------|
| Measured Depth (ft) | Vertical Depth (ft) | Local Coordinates |            | Comment                    |
|                     |                     | +N/-S (ft)        | +E/-W (ft) |                            |
| 4,271.0             | 4,238.3             | -47.8             | 252.6      | Tie-In Survey @ 4271' MD   |
| 4,319.0             | 4,283.9             | -56.7             | 264.7      | Start 10.43° Build/Turn    |
| 5,212.5             | 4,780.2             | -64.2             | 274.3      | LP @ 90.9° INC, 179.85° AZ |
| 9,762.5             | 4,708.6             | -688.9            | 433.6      | TD @ 9,762.5' MD           |