District I 1625 N. French Dr., Hobbs, NM 88240 District II' 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

### State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-144 Revised June 6, 2013

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office. For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

# Pit. Below-Grade Tank or

Proposed Alternative Method Permit or Closure Plan Application
Type of action:    Below grade tank registration   RCVD OCT 7'14
Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request  Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances
1.       Operator:       XTO Energy Inc       OGRID#:       5380         Address:       382 Road 3100 Aztec, NM 87410
Bruce Sullivan #1           API Number:         30-045-06640         OCD Permit Number:         '3068'
U/L or Qtr/Qtr:     1     Section     9     Township:     27N     Range:     9W     County:     San Juan       Center of Proposed Design:     Latitude     36.58683     Longitude     -107.78745     NAD:     1927     1983       Surface Owner:     Federal     State     Private     Tribal Trust or Indian Allotment
Pit: Subsection F, G or J of 19.15.17.11 NMAC  Temporary: Drilling Workover  Permanent Emergency Cavitation P&A Multi-Well Fluid Management Low Chloride Drilling Fluid yes no  Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other  String-Reinforced  Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D
3.    Below-grade tank: Subsection I of 19.15.17.11 NMAC   Volume:   120
4.  Alternative Method:  Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.
5.  Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)  Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)  Four foot height, four strands of barbed wire evenly spaced between one and four feet  Alternate. Please specify

Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	
Screen Netting Other	
Monthly inspections (If netting or screening is not physically feasible)	
7.	
Signs: Subsection C of 19.15.17.11 NMAC	
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
☐ Signed in compliance with 19.15.16.8 NMAC	
8. Variance and Eventions	
<u>Variances and Exceptions:</u> Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.	
Please check a box if one or more of the following is requested, if not leave blank:	
Variance(s): Requests must be submitted to the appropriate division district for consideration of approval.	
Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
9.	
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptance of the compliance of the complianc	ntable source
material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank.	□ Vas □ Na
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. ( <b>Does not apply to below grade tanks</b> )	☐ Yes ☐ No
- Written confirmation or verification from the municipality; Written approval obtained from the municipality	
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
<ul> <li>Within an unstable area. (Does not apply to below grade tanks)</li> <li>Engineering measures incorporated into the design; NM Bureau of Geology &amp; Mineral Resources; USGS; NM Geological Society; Topographic map</li> </ul>	☐ Yes ☐ No
Within a 100-year floodplain. (Does not apply to below grade tanks)	☐ Yes ☐ No
- FEMA map  Below Grade Tanks	
Delow Grade Failes	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured	☐ Yes ☐ No
from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;  NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	Yes No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.)  - Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial	☐ Yes ☐ No
application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application.  NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

Within 100 feet of a wetland.										
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes No									
Temporary Pit Non-low chloride drilling fluid										
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No									
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No									
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application;  - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site										
Within 300 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site										
Permanent Pit or Multi-Well Fluid Management Pit										
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).	☐ Yes ☐ No									
- Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ NO									
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No									
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application.										
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No									
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No									
10.	24.6									
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 No Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the doc										
attached.  Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC  Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC	NMAC									
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC	15.17.9 NMAC									
Previously Approved Design (attach copy of design) API Number: or Permit Number:										
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  A List of wells with approved application for permit to drill associated with the pit.  Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC  Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC										
Previously Approved Design (attach copy of design) API Number: or Permit Number:										

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the description is the subsection of the following items must be attached to the application.	documents are
attached.	ocuments are
Proposed Closure: 19.15.17.13 NMAC  Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.	
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well Fl	uid Management Pit
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be a closure plan. Please indicate, by a check mark in the box, that the documents are attached.  Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC  Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC  Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)  Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	attached to the
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. P 19.15.17.10 NMAC for guidance.	
Ground water is less than 25 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
<ul> <li>Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.</li> <li>Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> </ul>	☐ Yes ☐ No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	

	☐ Yes ☐ No										
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division  Within an unstable area.											
<ul> <li>Within an unstable area.</li> <li>Engineering measures incorporated into the design; NM Bureau of Geology &amp; Mineral Resources; USGS; NM Geological Society; Topographic map</li> </ul>											
Within a 100-year floodplain.											
- FEMA map	Yes No										
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC  Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17.11 NMAC  Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC  Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC  Waste Material Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC  Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC  Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC											
Operator Application Certification:  I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and believed.	ief.										
Name (Print): Title:											
Signature: Date:											
e-mail address:											
18.  OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment)	72/111										
18.	23/14										
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment)  OCD Representative Signature:  Approval Date: OCD Permit Number:  OCD Permit Number:  Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC  Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not section of the form until an approved closure plan has been obtained and the closure activities have been completed.	the closure report.										
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment)  OCD Representative Signature:  Approval Date: OCD Permit Number:  OCD Permit Number:  19.  Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC  Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not	the closure report.										
18.  OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment)  OCD Representative Signature: Approval Date: OCD Permit Number:  19.  Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC  Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not section of the form until an approved closure plan has been obtained and the closure activities have been completed.  Closure Completion Date: March 2, 2	the closure report.										

Operator Closure Certification:								
I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.								
Name (Print): James McDamel	Title: EHS Supervisor							
Signature:	Date: (0/1/14							
e-mail address: James McDaniel@xtoenergy.com	Telephone: (505) 333-3701							

District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 1220 S. St. Francis Dr., Santa Fe, NM 87505

Name of Company: XTO Energy

## State of New Mexico Energy Minerals and Natural Resources

Revised August 8, 2011 Submit 1 Copy to appropriate District Office in

Form C-141

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe. NM 87505

accordance with 19.15.29 NMAC.

Release Notification and Corrective Action										
	OPERATOR	☐ Initial Report	Final Report							
Inc.	Contact: James McDaniel									
Jose Marian 97410	Tolombono No. (505) 222 2701									

Address: 382 Road 3100, Aztec, New Mexico 87410 Telephone No.: (505) 333-3701 Facility Name: Bruce Sullivan #1 Facility Type: Gas Well (Fruitland Coal) Surface Owner: BLM Mineral Owner API No. 30-045-06640 LOCATION OF RELEASE Feet from the Unit Letter Section Township Range North/South Line Feet from the East/West Line County 9W 27N 1650 **FSL** 990 San Juan I FEL Latitude: N <u>36.58683</u> Longitude: W <u>-107.78745</u> NATURE OF RELEASE Type of Release: N/A Volume of Release: Volume Recovered: Source of Release: N/A Date and Hour of Occurrence: Date and Hour of Discovery: Was Immediate Notice Given? If YES, To Whom? ☐ Yes ☐ No ☒ Not Required N/A By Whom? Date and Hour Was a Watercourse Reached? If YES. Volume Impacting the Watercourse. ☐ Yes ⊠ No If a Watercourse was Impacted, Describe Fully.\* Describe Cause of Problem and Remedial Action Taken.\* The below grade tank was taken out of service at the Bruce Sullivan #1 well site due to the P&A'ing of this well site. A composite sample was collected beneath the location of the on-site BGT, and submitted for laboratory analysis for TPH via USEPA Method 418.1, Benzene and BTEX via USEPA Method 8021, and for total chlorides. The sample returned results below the 'Pit Rule' spill confirmation standards for TPH, Benzene, Total BTEX and the total chlorides, confirming that a release has not occurred at this location. Describe Area Affected and Cleanup Action Taken.\* No release has been confirmed for this location. I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and or regulations. OIL CONSERVATION DIVISION Signature: Printed Name: James McDaniel Approved by Environmental Specialist:

Approval Date:

Phone: 505-333-3701

Conditions of Approval:

**Expiration Date:** 

Attached

E-mail Address: James\_McDaniel@xtoenergy.com

Title: EHS Supervisor

Date:

<sup>\*</sup> Attach Additional Sheets If Necessary

## XTO Energy Inc. San Juan Basin Below Grade Tank Closure Report

Lease Name: Bruce Sullivan #1
API No.: 30-045-06640

Description: Unit I, Section 9, Township 27N, Range 9W, San Juan County

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure requirements of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

#### General Plan

1. XTO will close below-grade tanks within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.

Closure Date is March 2, 2009

- 2. XTO will close a below-grade tank that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.

  Closure Date is March 2, 2009
- 3. XTO will close a permitted below-grade tank within 60 days of cessation of the below-grade tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on form C-144.

Required C-144 Form is attached to this document.

4. XTO will remove liquids and sludge from below-grade tanks prior to implementing a closure method and will dispose of the liquids and sludge in a division-approved facility. Approved facilities and waste streams include:

Envirotech Permit No. NM01-0011 and IEI Permit No. NM 01-0010B

Soil contaminated by exempt petroleum hydrocarbons

Produced sand, pit sludge and contaminated bottoms from storage of exempt wastes

Basin Disposal Permit No. NM01-005

Produced water

All liquids and sludge were removed from the tank prior to closure activities.

5. XTO will remove the below-grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.

XTO has removed the below grade tank, and will dispose of it at a division approved facility, or recycle, reclaim or reuse it in a manner that is approved by the division.

6. XTO will remove any on-site equipment associated with a below-grade tank unless the equipment is required for some other purpose.

All equipment has been removed due to the plugging and abandoning of the Bruce Sullivan #1 well site.

At a minimum 5 point composite sample will be collected along with individual grab samples from any area that is wet, discolored or showing other evidence of a release. Samples will be analyzed for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 50 mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. XTO will notify the division of its results on form C-141.

A five point composite sample was taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Test Method	Limit (mg/Kg)	Results
Benzene	EPA SW-846 8021B or 8260B	0.2	< 0.05 mg/kg
BTEX	EPA SW-846 8021B or 8260B	50	< 0.25 mg/kg
TPH	EPA SW-846 418.1	100	< 20 mg/kg
Chlorides	EPA 300.1	250 or background	6.4 mg/kg

8. If XTO or the division determines that a release has occurred, XTO will comply with 19.15.3.116 NMAC and 19.15.1.19NMAC as appropriate.

No release has been confirmed at this location

9. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, XTO will backfill the excavation with compacted, non-waste containing, earthen material; construct a division prescribed soil cover; recontour and re-vegetate the site.

The pit cellar was backfilled using compacted, non-waste containing earthen material, with a division prescribed soil cover.

- 10. Notice of Closure operations will be given to the Aztec Division District III office between 72 hours and one week prior to the start of closure activities via email or verbally.

  The notification will include the following:
  - i. Operator's name
  - ii. Well Name and API Number
  - iii. Location by Unit Letter, Section, Township, and Range

Due to a misunderstanding regarding the 'pit rule' in 2008-2009, the proper notifications were not made prior to the beginning of closure activities. This misunderstanding has been corrected, and proper notifications are made currently.

The surface owner shall be notified of XTO's proposal to close the BGT as per the approved closure plan using certified mail, return receipt requested.

Due to a misunderstanding regarding the 'pit rule' in 2008-2009, the proper notifications were not made prior to the beginning of closure activities. This misunderstanding has been corrected, and proper notifications are made currently.

11. Re-contouring of location will match fit, shape, line, form and texture of the surrounding area. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be placed in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The location has been recontoured to match the above specifications.

12. A minimum of 4 feet of cover shall be achieved and the cover shall include 1 foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The site has been backfilled to match these specifications.

13. XTO will seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will be used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

The site has been reclaimed pursuant to the BLM MOU.

- 14. All closure activities will include proper documentation and be available for review upon request and will be submitted in closure report form to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on form C-144 and incorporate the following:
  - i. Proof of closure notice to division and surface owner; **Not made**
  - ii. Details on capping and covering, where applicable; per OCD Specifications
  - iii. Inspection reports; attached
  - iv. Confirmation sampling analytical results; attached
  - v. Disposal facility name(s) and permit number(s); see above
  - vi. Soil backfilling and cover installation; per OCD Specifications
  - vii. Re-vegetation application rates and seeding techniques, (or approved alternative to re-vegetation requirements if applicable); **Per BLM MOU.**
  - viii. Photo documentation of the site reclamation. attached
- 15. This closure report is being submitted after the 60 day deadline required by the 'Pit Rule' due to a misunderstanding of the 'Pit Rule' in 2008-2009



#### **COVER LETTER**

Monday, March 02, 2009

Martin Nee XTO Energy 382 County Road 3100 Aztec, NM 87410

TEL: (505) 333-3100 FAX (505) 333-3280

RE: BGT Samples

Dear Martin Nee:

Order No.: 0902092

Hall Environmental Analysis Laboratory, Inc. received 1 sample(s) on 2/10/2009 for the analyses presented in the following report.

These were analyzed according to EPA procedures or equivalent. Below is a list of our accreditations. To access our accredited tests please go to www.hallenvironmental.com or the state specific web sites.

Reporting limits are determined by EPA methodology. No determination of compounds below these (denoted by the ND or < sign) has been made.

Please don't hesitate to contact HEAL for any additional information or clarifications.

Sincerely,

Andy Freeman, Business Manager Nancy McDuffie, Laboratory Manager

NM Lab # NM9425 AZ license # AZ0682 ORELAP Lab # NM100001 Texas Lab# T104704424-08-TX



## Hall Environmental Analysis Laboratory, Inc.

Date: 02-Mar-09

CLIENT:

XTO Energy

Client Sample ID: Bruce Sullivan #1 BGT Cellar

Lab Order:

0902092

Collection Date: 2/6/2009 2:00:00 PM

Project:

DOM 0 1

Date Received: 2/10/2009 2:00:00

Lab ID:

BGT Samples 0902092-01

Matrix: SOIL

Analyses	Result	PQL	Qual Units	DF	Date Analyzed
EPA METHOD 8021B: VOLATILES			•		Analyst: DAM
Benzene	ND	0.050	mg/Kg	1	2/11/2009 11:59:28 AM
Toluene	ND	0.050	mg/Kg	1	2/11/2009 11:59:28 AM
Ethylbenzene	ND	0.050	mg/Kg	1	2/11/2009 11:59:28 AM
Xylenes, Total	ND	0.10	mg/Kg	1	2/11/2009 11:59:28 AM
Surr: 4-Bromofluorobenzene	99.0	66.8-139	%REC	1	2/11/2009 11:59:28 AM
EPA METHOD 300.0: ANIONS			•		Analyst: RAGS
Chloride	6.4	0.30	mg/Kg	1	2/12/2009 2:18:56 AM
EPA METHOD 418.1: TPH					Analyst: LRW
Petroleum Hydrocarbons, TR	ND	20	mg/Kg	1	2/12/2009

Qualifiers:

- Value exceeds Maximum Contaminant Level
- E Estimated value
- J Analyte detected below quantitation limits
- ND Not Detected at the Reporting Limit
- S Spike recovery outside accepted recovery limits
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- MCL Maximum Contaminant Level
  - RL Reporting Limit

Date: 02-Mar-09

## **QA/QC SUMMARY REPORT**

Client:

XTO Energy

Project: BGT Samples

Work Order:

0902092

Analyte	Result	Units	PQL	%Rec	LowLimit	HighLi	mit	%RPD	RPD	Limit Qual																		
Method: EPA Method 418.1: TF	РН																											
Sample ID: MB-18298		MBLK			Batch	ID: 1	8298	Analysis Da	ite:	2/12/2009																		
Petroleum Hydrocarbons, TR	ND	mg/Kg	20																									
Sample ID: LCS-18298		LCS	•		Batch	ID: 1	8298	Analysis Da	ite:	2/12/2009																		
Petroleum Hydrocarbons, TR	98.68	mg/Kg	20	98.7	82	114																						
Sample ID: LCSD-18298		LCSD			Batch	ID: 1	8298	Analysis Da	te:	2/12/2009																		
Petroleum Hydrocarbons, TR	97.22	mg/Kg	20	97.2	82	114		1.49	20																			
Method: EPA Method 8021B: V	olatiles																											
Sample ID: 0902092-01A MSD		MSD			Batch	1D: 1	8275	Analysis Da	te:	2/11/2009 2:32:11 PM																		
Benzene	1.074	mg/Kg	0.050	107	78.8	132		2.17	27																			
Toluene	1.128	mg/Kg	0.050	113	78.9	112		112		112		112		112		112		112		112		112		112		2.79	19	S
Ethylbenzene	1.251	mg/Kg	0.050	125	69.3	125		125		125		125		125		125		125		3.73	10	S						
Xylenes, Total	3.770	mg/Kg	0.10	126	73	128		3.47	13																			
Sample ID: MB-18275		MBLK			Batch	ID: 18275		Batch ID: 18275		Analysis Da	te:	2/11/2009 3:33:22 PM																
Benzene	ND	mg/Kg	0.050																									
Toluene	ND	mg/Kg	0.050																									
Ethylbenzene	ND	mg/Kg	0.050																									
Xylenes, Total	ND -	mg/Kg	0.10																									
Sample ID: LCS-18275		LCS			Batch	ID: 1	8275	Analysis Da	te:	2/11/2009 3:02:50 PM																		
Benzene	0.9877	mg/Kg	0.050	97.2	78.8	132																						
Toluene	1.010	mg/Kg	0.050	100	78.9	112																						
Ethylbenzene	1.102	mg/Kg	0.050	110	69.3	125																						
Xylenes, Total	3.302	mg/Kg	0.10	110	73	128																						
Sample ID: 0902092-01A MS		MS			Batch	ID: 1	8275	Analysis Da	te:	2/11/2009 2:01:39 PM																		
Benzene	1.051	mg/Kg	0.050	105	78.8	132			•																			
Toluene	1.097	mg/Kg	0.050	110	78.9	112																						
Ethylbenzene	1.206	mg/Kg	0.050	121	69.3	125																						
Xylenes, Total	3.641	mg/Kg	0.10	121	73	128																						

#### Qualifiers:

E Estimated value

J Analyte detected below quantitation limits

R RPD outside accepted recovery limits

H Holding times for preparation or analysis exceeded

ND Not Detected at the Reporting Limit

S Spike recovery outside accepted recovery limits

## Hall Environmental Analysis Laboratory, Inc.

## Sample Receipt Checklist

Client Name XTO ENERGY	Date Received	<b>d</b> :		2/10/2009				
Work Order Number 0902092				Received by:	TLS		ø.	
Checklist completed by:		4	Date	Sample ID la	bels checked		Initials	
Matrix:	Carrier name	Fed	<u>Ex</u>					
Shipping container/cooler in good condition?		Yes	$ \mathbf{V} $	No 🗌	Not Present			
Custody seals intact on shipping container/coo	ler?	Yes	$\checkmark$	No 🗌	Not Present		Not Shipped	
Custody seals intact on sample bottles?		Yes		No 🗆	N/A	$\checkmark$		
Chain of custody present?		Yes	<b>✓</b>	No 🗌				
Chain of custody signed when relinquished and	received?	Yes	$\checkmark$	No 🗆				
Chain of custody agrees with sample labels?		Yes	$\checkmark$	No 🗆				
Samples in proper container/bottle?		Yes	V	No 🗆				
Sample containers intact?		Yes	$ \mathbf{Z} $	No 🗆				
Sufficient sample volume for indicated test?		Yes	$ \mathbf{V} $	No 🗀				
All samples received within holding time?		Yes	V	No 🗌				
Water - VOA vials have zero headspace?	No VOA vials subm	nitted	V	Yes	No 🗌			
Water - Preservation labels on bottle and cap n	natch?	Yes		No 🗌	N/A 🗹			
Water - pH acceptable upon receipt?		Yes		No 🗌	N/A 🗹			
Container/Temp Blank temperature?			1°	<6° C Acceptable	e			
COMMENTS:				If given sufficient	time to cool.			
	·							
				=		===	=====	===
Client contacted	Date contacted:	•		Perso	on contacted		<del></del>	
Contacted by:	Regarding:							
Comments:								
							-	
	-							
							-	
	•							
Corrective Action								

Chain-of-Custody Record			Turn-Around Time:						H H LIALI ENVIRONMENTAL												
Client:	TO ENE	ERGY	☐X Standard ☐ Rush  Project Name:					HALL ENVIRONMENT ANALYSIS LABORATO													•
									www.hallenvironmental.com												
Address.			Project #:	GT SA	myles	<u> </u>	4901 Hawkins NE - Albuquerque, NM 87109														
		- NM 87410	- Froject#.	علد	A CONTRACTOR		Te	1. 505	-345-				_		410	7			· ·	ينتك	
		133-3207	BRUCE	<u>Suur</u>	MN #		ŭ.			~_		maiy	/sis	Req	uest		) A diameter			· · · · · · · · · · · · · · · · · · ·	
email or			Project Mana	iger:			(F2	l lo	ese		1	ľ	304)	ွှ					. !		
	QA/QC Package:  □ Standard □ Level 4 (Full Validation)			ARTIN N	IEE		<del>TMB'</del> s (8021)	(Gas	(Gas/Diesel)				,PO4,S	2 PCB			300.D		5) 4)		
☐ Other			Sampler:	KueT		·. · · · · · · · · · · · · · · · · · ·	Į₩.	퓝		= =	) <u>@</u>	구	S.	808			2			1.7+1	Î
□ EDD (	Type)		Oxite: Sample Lein	文Ves octaline	EANO.	7	si	3E + .	801	4118	d 826	r PAI	NO3,	/ səp		(VOA)	Ş				γor
Date	Time	Sample Request ID	Container Type and #	Preservative Type	HE	AL No. 2097	BTEX + MTBE+	BTEX + MTBE + TPH (Gas only)	TPH Method 8015B	TPH (Method 418.1)	EDC (Method 8260)	8310 (PNA or PAH)	Anions (F,CI,NO3,NO2,PO4,SO4)	8081 Pesticides / 8082 PCB's	8260B (VOA)	8270 (Semi-VOA)	CHOPIDES				Air Bubbles (Y or N)
2/6	2:00	BRUCE SWLIVAN # 1 BGT CEURE	(2)402 JAP	ON SICE		-)	X		<del>-  </del> -	X							X				
									$\neg$	_ <del> </del> -					, <u> </u>						
	<del>                                     </del>		<del>                                     </del>		<del> </del> .									_					$\dashv$	$\vdash$	-
	GPS	N36°35.226 WIO7°	47,271											-							
						,					T -										
																			. ,		
			•																		
											1										
		, , ,										7						7.			
Date: 2/9	Time: 8:00	Relinquished by Hackell		Received by:	110/0	925	1	narks		RES	.wī	s 1	To:	,							
Date:	Time:	Relinquished by:		necesved by:	· .		K	.ue 144	C#M	RES loek lup!	STRI	A						·			



## Well Below Tank Inspection Report

RouteName Below Grade Pit	: Forms (Temp	StopName p Bruce Sullivan #1		Pumper Blackburn, Shawn	Foreman Unassigned	WellName BRUCE SULLIVAN 01 (PA)		APIWellNumber 3004506640		Section 9	Range 9W	Township 27N	
InspectorName	Inspection Date	Inspection Time	Visible LinerTears	VisibleTankLeak Overflow	Collection OfSurfaceRun	Visible LayerOil		Freeboard EstFT	PitLocation	PitType	Notes		
l. parke	07/23/2008	02:20	No	No	No	No	No	5					
I. parke	08/19/2008	01:20	No	No	No	No	No	5					
MIKE G	09/17/2008	09:18	No	No	No	No	No	5					
LPARKE	10/29/2008	11:08	No	No	No	No	No	5	Well Water Pit	Below Ground			
LPARKE	12/31/2008	11:00	No	No	No	No	No	5	Well Water Pit	Below Ground	P&A		
LPARKE	01/18/2009	11:00	No	No	No	No	No	5	Well Water Pit	Below Ground	Pit Rem	oved wel	IP&A

# XTO Energy Inc. Bruce Sullivan #1 (30-045-06640) Section 9 (I), Township 27N, Range 9W Closure Date: March 2, 2009

Photo 1: Bruce Sullivan #1 After Reclamation

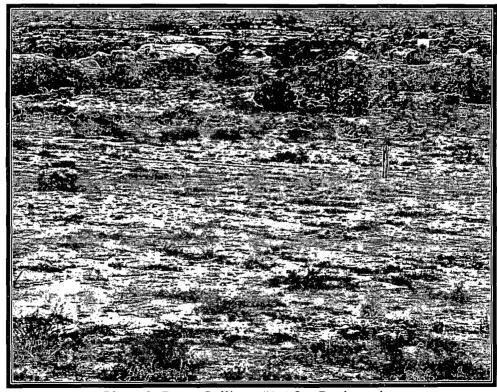


Photo 2: Bruce Sullivan #1 After Reclamation