District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division

1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-144 Revised June 6, 2013

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.

For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Below-Grade Tank, or
12068 Proposed Alternative Method Permit or Closure Plan Application
Type of action: Below grade tank registration RCVD DCT 9'14
or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
L.
Operator: XTO Energy Inc OGRID #: 5380 Address: 382 Road 3100 Aztec, NM 87410
Facility or well name: Martinez Gas COM G #1
API Number: 30-045-12172 OCD Permit Number: '3079'
U/L or Qtr/Qtr: A Section 24 Township: 29N Range: 10W County: San Juan
Center of Proposed Design: Latitude 36.71503 Longitude -107.82892 NAD: 1927 \times 1983
Surface Owner: Federal State Private Tribal Trust or Indian Allotment
Pit: Subsection F, G or J of 19.15.17.11 NMAC
Temporary: Drilling Workover
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A ☐ Multi-Well Fluid Management Low Chloride Drilling Fluid ☐ yes ☐ no
Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other
☐ String-Reinforced
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D
3. Subsection of 19.15.17.11 NMAC
Volume: 100 bbl Type of fluid: Produced Water
Tank Construction material: Steel
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☒ Visible sidewalls only ☐ Other
Liner type: Thickness mil
4.
Alternative Method:
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.
5.
Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital,
institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet
Alternate. Please specify

Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	
Screen Netting Other	
☐ Monthly inspections (If netting or screening is not physically feasible)	
7.	
Signs: Subsection C of 19.15.17.11 NMAC	
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
Signed in compliance with 19.15.16.8 NMAC	
Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptant are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	otable source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - □ NM Office of the State Engineer - iWATERS database search; □ USGS; □ Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality: Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
 Within an unstable area. (Does not apply to below grade tanks) Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	☐ Yes ☐ No
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application.	☐ Yes ☐ No
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

W/4': 100 C	
Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aeriel photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 Natructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the do attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	O NMAC 15.17.9 NMAC
Multi-Well Fluid Management Pit Checklist: Subsection B of (9:15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the do attached. Design Plan - based upon the appropriate requirements of 19:15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19:15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19:15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19:15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19:15.17.10 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number: or Permit Number:	9.15.17.9 NMAC

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the distribution is the subsection of the following items must be attached to the application.	documents are
attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan	
☐ Emergency Response Plan ☐ Oil Field Waste Stream Characterization	
 ☐ Monitoring and Inspection Plan ☐ Erosion Control Plan ☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC 	
13.	
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.	
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well Fl	uid Management Pit
Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method	
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
15. Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. P. 19.15.17.10 NMAC for guidance.	
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search: USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map: Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	Yes No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map: Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	

adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality: Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	Yes No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological	
Society; Topographic map Within a 100-year floodplain.	☐ Yes ☐ No
- FEMA map	Yes No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plants a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17. Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	II NMAC 15.17.11 NMAC
Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and beli	ef.
Name (Print): Title:	
Signature: Date:	
e-mail address: Telephone:	
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment)	
OCD Representative Signature: Approval Date: 11/6/12	14
Title: OCD Permit Number:	
Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not section of the form until an approved closure plan has been obtained and the closure activities have been completed.	complete this
☐ Closure Completion Date: October 2.	2008
20. Closure Method: Waste Excavation and Removal ☐ On-Site Closure Method ☐ Alternative Closure Method ☐ Waste Removal (Closed-lo ☐ If different from approved plan, please explain.	op systems only)
Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please incommark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure for private land only) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closure) Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation)	dicate, by a check

Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report belief. I also certify that the closure complies with all applicable closure requirements	
Name (Print):	Title: EHS Supervisor
e-mail address: James McDaniel@xtoenergy.com	Date:

District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III
1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Submit 1 Copy to appropriate District Office in accordance with 19.15.29 NMAC.

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-141

Revised August 8, 2011

Release Notificat	ion and Co	rrective A	ction				
	OPERA?	ΓOR	Initia	l Report	\boxtimes	Final Report	
Name of Company: XTO Energy Inc.	Contact: Ja	nes McDaniel					
Address: 382 Road 3100, Aztec, New Mexico 87410	Telephone 1	No.: (505) 333-3	3701				
Facility Name: Martinez Gas COM G #1		e: Gas Well (N					
		· · · · · · · · · · · · · · · · · · ·	1 . 2				
Surface Owner: Private Mineral Own	er		API No.	30-045-1	2172		
LOCATI	ON OF REI	LEASE					
Unit Letter Section Township Range Feet from the No.	orth/South Line	Feet from the	East/West Line	County			
A 24 29N 10W 1190	FNL	790	FEL	San Juan			
Latitude: N 36.7 NATUF Type of Release: N/A	Longitude RE OF REL	EASE	Volume R	ecovered:			
Source of Release: N/A		our of Occurrence		four of Dis	coverv.		
	N/A						
Was Immediate Notice Given?	If YES, To	Whom?					
☐ Yes ☐ No ☒ Not Requir	ed N/A						
By Whom?	Date and F						
Was a Watercourse Reached?	If YES, Vo	lume Impacting t	the Watercourse.				
☐ Yes ⊠ No							
If a Watercourse was Impacted, Describe Fully.*							
Describe Cause of Problem and Remedial Action Taken.*							
The below grade tank was taken out of service at the Martinez Gas CC							
beneath the location of the on-site BGT, and submitted for laboratory							
8021, and for total chlorides. The sample returned results below the 'I	it Rule spill con	firmation standar	ds for 112H, Benzen	e, Total B1	EX and	the total	
chlorides, confirming that a release has not occurred at this location. Describe Area Affected and Cleanup Action Taken.*							
No release has been confirmed for this location.							
I hereby certify that the information given above is true and complete	to the best of my	knowledge and u	inderstand that pursi	uant to NM	OCD ru	iles and	
regulations all operators are required to report and/or file certain release	se notifications a	nd perform correc	ctive actions for rele	ases which	may en	danger	
public health or the environment. The acceptance of a C-141 report by							
should their operations have failed to adequately investigate and reme							
or the environment. In addition, NMOCD acceptance of a C-141 reported federal, state, or local laws and/or regulations.	rt does not reliev	e the operator of	responsibility for co	impliance w	ith any	other	
rederal, state, or local laws and or regulations.		OIL CON	SERVATION	DIVISIO	NI		
Signature:		OIL CON	SERVATION .	DIVISIC) I'V		
		,					
Printed Name: James McDaniel	Approved by	Environmental S	pecialist:	·····			
			173				
Title: EHS Supervisor	Approval Dat	e:	Expiration I	Jate:	:		
E-mail Address: James McDaniel@xtoenergy.com	Conditions of	`Approval:		Attached			

Phone: 505-333-3701

^{*} Attach Additional Sheets If Necessary

XTO Energy Inc. Sån Juan Basin Below Grade Tank Closure Report

Lease Name: Martinez Gas COM G #1

API No.: 30-045-12172

Description: Unit A, Section 24, Township 29N, Range 10W, San Juan County

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure requirements of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

1. XTO will close below-grade tanks within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.

Closure Date is October 2, 2008

- 2. XTO will close a below-grade tank that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.

 Closure Date is October 2, 2008
- 3. XTO will close a permitted below-grade tank within 60 days of cessation of the below-grade tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on form C-144.

Required C-144 Form is attached to this document.

4. XTO will remove liquids and sludge from below-grade tanks prior to implementing a closure method and will dispose of the liquids and sludge in a division-approved facility. Approved facilities and waste streams include:

Envirotech Permit No. NM01-0011 and IEI Permit No. NM 01-0010B

Soil contaminated by exempt petroleum hydrocarbons

Produced sand, pit sludge and contaminated bottoms from storage of exempt wastes

Basin Disposal Permit No. NM01-005 Produced water

All liquids and sludge were removed from the tank prior to closure activities.

5. XTO will remove the below-grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.

XTO has removed the below grade tank, and will dispose of it at a division approved facility, or recycle, reclaim or reuse it in a manner that is approved by the division.

6. XTO will remove any on-site equipment associated with a below-grade tank unless the equipment is required for some other purpose.

Equipment will remain on-site for the continued production of oil and gas

*- 17 P . . .

At a minimum 5 point composite sample will be collected along with individual grab samples from any area that is wet, discolored or showing other evidence of a release. Samples will be analyzed for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 50 mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. XTO will notify the division of its results on form C-141.

A five point composite sample was taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Test Method	Limit (mg/Kg)	Results
Benzene	EPA SW-846 8021B or 8260B	0.2	< 0.05 mg/kg
BTEX	EPA SW-846 8021B or 8260B	50	< 0.25 mg/kg
TPH	EPA SW-846 418.1	100	< 20 mg/kg
Chlorides	EPA 300.1	250 or background	110 mg/kg

8. If XTO or the division determines that a release has occurred, XTO will comply with 19.15.3.116 NMAC and 19.15.1.19NMAC as appropriate.

No release has been confirmed at this location

9. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, XTO will backfill the excavation with compacted, non-waste containing, earthen material; construct a division prescribed soil cover; recontour and re-vegetate the site.

The pit cellar was backfilled using compacted, non-waste containing earthen material, with a division prescribed soil cover.

- 10. Notice of Closure operations will be given to the Aztec Division District III office between 72 hours and one week prior to the start of closure activities via email or verbally.

 The notification will include the following:
 - i. Operator's name
 - ii. Well Name and API Number
 - iii. Location by Unit Letter, Section, Township, and Range

Due to a misunderstanding regarding the 'pit rule' in 2008-2009, the proper notifications were not made prior to the beginning of closure activities. This misunderstanding has been corrected, and proper notifications are made currently.

The surface owner shall be notified of XTO's proposal to close the BGT as per the approved closure plan using certified mail, return receipt requested.

Due to a misunderstanding regarding the 'pit rule' in 2008-2009, the proper notifications were not made prior to the beginning of closure activities. This misunderstanding has been corrected, and proper notifications are made currently.

Re-contouring of location will match fit, shape, line, form and texture of the surrounding area. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be placed in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The location will be recontoured to match the above specifications.

12. A minimum of 4 feet of cover shall be achieved and the cover shall include 1 foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The site has been backfilled to match these specifications.

13. XTO will seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will be used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

The site will be reclaimed pursuant to the surface use agreement.

- 14. All closure activities will include proper documentation and be available for review upon request and will be submitted in closure report form to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on form C-144 and incorporate the following:
 - i. Proof of closure notice to division and surface owner; Not made
 - ii. Details on capping and covering, where applicable; per OCD Specifications
 - iii. Inspection reports; attached
 - iv. Confirmation sampling analytical results; attached
 - v. Disposal facility name(s) and permit number(s); see above
 - vi. Soil backfilling and cover installation; per OCD Specifications
 - vii. Re-vegetation application rates and seeding techniques, (or approved alternative to re-vegetation requirements if applicable); NA.
 - viii. Photo documentation of the site reclamation. attached
- 15. This closure report is being submitted after the 60 day deadline required by the 'Pit Rule' due to a misunderstanding of the 'Pit Rule' in 2008-2009



COVER LETTER

Thursday, October 02, 2008

Martin Nee XTO Energy 382 County Road 3100 Aztec, NM 87410

TEL: (505) 333-3100 FAX (505) 333-3280

RE: Martinez Gas Com G#1 Pit Tank Cellar

Dear Martin Nee:

Order No.: 0809369

Hall Environmental Analysis Laboratory, Inc. received 1 sample(s) on 9/18/2008 for the analyses presented in the following report.

These were analyzed according to EPA procedures or equivalent.

Reporting limits are determined by EPA methodology. No determination of compounds below these (denoted by the ND or < sign) has been made.

Please don't hesitate to contact HEAL for any additional information or clarifications.

Sincerely,

Andy Freeman, Business Manager Nancy McDuffie, Laboratory Manager

NM Lab # NM9425 AZ license # AZ0682 OREL.AP Lab # NM100001 Texas Lab# T104704424-08-TX



Hall Environmental Analysis Laboratory, Inc.

Date: 02-Oct-08

CLIENT:

XTO Energy

Client Sample ID: Martinez Gas Com G#1 Pit Tank Ce

Lab Order:

0809369

Collection Date: 9/15/2008 2:30:00 PM

Project:

Martinez Gas Com G#1 Pit Tank Cellar

Date Received: 9/18/2008

Lab ID:

0809369-01

Matrix: SOIL

Analyses	Result	PQL Q	ual Units	DF	Date Analyzed
EPA METHOD 8021B: VOLATILES		· · · · · · · · · · · · · · · · · · ·			Analyst: DAM
Methyl tert-butyl ether (MTBE)	ND	0.20	mg/Kg	1	9/23/2008 7:11:20 PM
Benzene .	ND _s	0.050	mg/Kg	1	9/23/2008 7:11:20 PM
Toluene	ND.	0.050	mg/Kg	1	9/23/2008 7:11:20 PM
Ethylbenzene	ND."	0.050	mg/Kg	1	9/23/2008 7:11:20 PM
Xylenes, Total	ND	0.10	mg/Kg	1	9/23/2008 7:11:20 PM
Surr: 4-Bromofluorobenzene	86.2	66.8-139	%REC	1	9/23/2008 7:11:20 PM
EPA METHOD 300.0: ANIONS					Analyst: SLB
Chloride	110	1.5	mg/Kg	5	9/25/2008 12:20:41 PM
EPA METHOD 418.1: TPH					Analyst: LRW
Petroleum Hydrocarbons, TR	ND	20	mg/Kg	1	9/19/2008

Reporting Limit

Value exceeds Maximum Contaminant Level

E Value above quantitation range

Analyte detected below quantitation limits

Not Detected at the Reporting Limit ND

Spike recovery outside accepted recovery limits

Analyte detected in the associated Method Blank

Н Holding times for preparation or analysis exceeded

Maximum Contaminant Level MCL

QA/QC SUMMARY REPORT

Client:

XTO Energy

Project:

Martinez Gas Com G#1 Pit Tank Cellar

Work Order:

Date: 02-Oct-08

0809369

Analyte.	Result	Units	PQL	%Rec	LowLimit	HighLimit	%RPD RPI	DLimit Qual
Method: EPA Method 300.0: A	ınions			***************				
Sample ID: MB-17146		MBLK			Batch	ID: 17146	Analysis Date:	9/30/2008 8:24:07 PM
Chloride	ND	mg/Kg	0.30					,
Sample ID: LCS-17146		LCS	:.•		Batch	ID: 17146	Analysis Date:	9/30/2008 8:41:32 PM
Chloride	14.70	mg/Kg	0.30	98.0	90	110		<u>i</u>
Method: EPA Method 418.1: T	PH							1
Sample ID: MB-17117	• ••	MBLK	27.50		Batch	ID: 17117	Analysis Date:	9/19/2008
Petroleum Hydrocarbons, TR	ND	mg/Kg	20					•
Sample ID: LCS-17117	,,	LCS			Batch	ID: 17117	Analysis Date:	9/19/2008
Petroleum Hydrocarbons, TR	86.88	mg/Kg	20	86.9	82	114		
Sample ID: LCSD-17117		LCSD			Batch	ID: 17117	Analysis Date:	9/19/2008
Petroleum Hydrocarbons, TR	89.80	mg/Kg	20	89.8	82	114	3.31 2	0
Method: EPA Method 8021B:	Volatiles							
Sample ID: MB-17107		MBLK			Batch	ID: 1710 7	Analysis Date:	9/20/2008 4:51:05 AM
Methyl tert-butyl ether (MTBE)	ND	mg/Kg	0.10					
Benzene	ND	mg/Kg	0.050				•	
Toluene	ND	mg/Kg	0.050					
Ethylbenzene	ND	mg/Kg	0.050					
Xylenes, Total	ND	mg/Kg	0.10				•	1
Sample ID: LCS-17107		LCS			Batch	ID: 17107	Analysis Date:	9/20/2008 5:21:18 AM
Methyl tert-butyl ether (MTBE)	0.8571	mg/Kg	0.10	209	67.9	135		S
Benzene	0.3223	mg/Kg	0.050	115	78.8	132		
Toluene	2.240	mg/Kg	0.050	112	78.9	112		S
Ethylbenzene	0.4642	mg/Kg	0.050	116	69.3	125		•
Xylenes, Total	2.770	mg/Kg	0.10	120	73	128		

Dualifiers	:

E Value above quantitation range

J Analyte detected below quantitation limits

R RPD outside accepted recovery limits

H Holding times for preparation or analysis exceeded

ND Not Detected at the Reporting Limit

S Spike recovery outside accepted recovery limits

Hall Environmental Analysis Laboratory, Inc.

Sample Receipt Checklist

Client Name XTO ENERGY		Date Receive	d:	9/18/2008	
Work Order Number 0809369		Received by	: ARS	45	
Shooklist completed by	0	Sample ID I	abels checked I		
Checklist completed by: Signature		118 () 8		Initials	
Matrix: Carrier	name <u>FedEx</u>				
Shipping container/cooler in good condition?	Yes 🗹	No 🗌	Not Present		
Custody seals intact on shipping container/cooler?	Yes 🗹	No 🗀	Not Present	☐ Not Shipped	
Custody seals intact on sample bottles?	Yes 🗹	No 🗆	N/A		
Chain of custody present?	Yes 🗹	No 🗆			
chain of custody signed when relinquished and received?	Yes 🗹	No 🗀		•	
chain of custody agrees with sample labels?	Yes 😧	No 🗀			
samples in proper container/bottle?	Yes 🗹	No 🗌			
ample containers intact?	Yes 🗹	No 🗌			
ufficient sample volume for indicated test?	Yes 🗹	No 🗀			
Il samples received within holding time?	Yes 🗹	No 🗀			
Vater - VOA vials have zero headspace? No VOA vial	ls submitted 🔽	Yes 🗌	No 🗌		
/ater - Preservation labels on bottle and cap match?	Yes 🗌	No 🗀	N/A 🗹	:	
/ater - pH acceptable upon receipt?	Yes 🗌	No 🗀	N/A 🗹		
ontainer/Temp Blank temperature?	5°	<6° C Acceptable			•
OMMENTS:		If given sufficient	time to cool.		
				The same ways and the same	
lient contacted Date contacted	d:	Pers	on contacted	1	
ontacted by: Regarding:				•	
					
omments:					
					**
Corrective Action	· · · · · · · · · · · · · · · · · · ·				

Chain-of-Custody Record	Turn-Around	Turn-Around Time: M Standard Rush Project Name: MARTINEZ GAS COM G#1 PIT TANK CEUME					_						_					_
Client: XTO ENERGY	M Standard					HALL ENVIRONMENTAL												
THE EXECUSION	Project Nam					ANALYSIS LABORATORY												
Address: 382 POAD 3100						www.hallenvironmental.com												
787 FOAD 2100	Project #:	PIT IAN	IK ('EUAE		1				Albuquerque, NM 87109									
AZTEC NM. 87410				cin s			1. 505-345-3975 Fax 505-345-4107 Analysis Request											
Phone #: 505-333-3207	D.: 144:																	
email or Fax#:	Project Man	ager:		TMB's (8021)	only	ese			<i>'</i>		δ	S						
QA/QC Package: ☐ Standard ☐ Level 4 (Full Validation)	n	MARTIN NEE				3as/Di					,PO4,	2 PCB			O			
☐ Other	Sampler:	Sampler: Kuet On Ice)) B	-	(1)	d 8260)	r PAH)	NO3,NO	des / 808			300.0		.	15
□ EDD (Type)						8015	418	1504						VOA)		1		\ Y or }
Date Time Sample Request ID	Container	Preservative	HEAL NO.	BTEX + MTBE	BTEX + MTBE + TPH (Gas only)	TPH Method 8015B (Gas/Diesel)	TPH (Method 418.1)	EDB (Method 504.1)	EDC (Method 8260)	8310 (PNA or PAH)	Anions (F,CI,NO ₃ ,NO ₂ ,PO ₄ ,SO ₄)	8081 Pesticides / 8082 PCB'	8260B (VOA)	8270 (Semi-VOA)	CHLORIDES			Air Bubbles (Y or N)
9/15 2:30 pm PIT TANK CELLAR	(2) 4 0Z JAR	ON S ICE	00000	X		-	X	п.	- 43	w	1	8	<u> </u>	ω,	χ			+
115 2.50 pm Fit days General	(A) (BZ = 40	3 100		+^							<u> </u>		-		\rightarrow		\vdash	
			 								\vdash	-			\longrightarrow			\dashv
				-														-
GPS N36°42.908 W107	°49.71-7		· .	 								7	-					+
ELEV. 5549	7.78			1						· · ·			·					
ECEV. 5541		<u> </u>		+-													$\neg \uparrow$	
										-					\dashv			
				+	\vdash		\dashv								-			+
		 	-	+-	\vdash					. •		-					. 	
		}													·			
	,	<u> </u>					_	-			·		٠,,				- 	
Date: Time: Relinquished by:	/ 	Flece ved by:		Don			1					لا						
9-17-08 7:30 AM. Lun & Horse El	tw		9:10 9/18/02	′ ລ	narks	¥ .) YES	 ULT	٠ς -	 Toʻ			•		•	٠.		
Date: Time: Relinquished by:		Received by:] k	/ we	_†	10€	KS	rea	ě	XTC) ÉN	E	M	. Os	24)	
				}	<u>Gm</u>		4AN	1PI	<u> 1</u>) :	· .			. 1	<u></u>	**************************************	<u> </u>	



Well Below Tank Inspection Report

RouteName	StopName	Pumper	Foreman WeliName			APIWellNumber	Section	Range	Township		
DEN NM Run 43B	MARTINEZ GAS COM	Bramwell, Chris	MARTIN	EZ GC G	01	3004512172	24	10W	29N		
InspectorName Inspection Date	Inspection Visible Time LinerTears	VisibleTankLeak Overflow	Collection OfSurfaceRun	Visible LayerOil	Visible Leak	Freeboard EstFT	PitLocation	PitType	Notes		
Pat Roark 08/12/2008	13:00 No	No	Yes	Yes	No	2					
BRUCE FRANTZ 09/09/2008	1300:00 No	Yes	Yes	No	Yes	60			•		
BRUCE FRANTZ 10/17/2008	13:00 No	Yes	Yes	. No	Yes	60	Compressor Water Pit	Above Ground			
BRUCE FRANTZ 10/19/2008	14:00 No	Yes	Yes	No	Yes	100	Compressor Water Pit	Above Ground			

XTO Energy Inc. Martinez Gas COM G #1 (30-045-12172) Section 24 (A), Township 29N, Range 10W

Closure Date: October 2, 2008

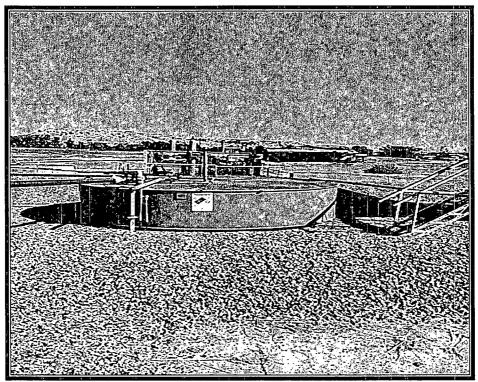


Photo 1: Martinez Gas COM G #1 After Reclamation

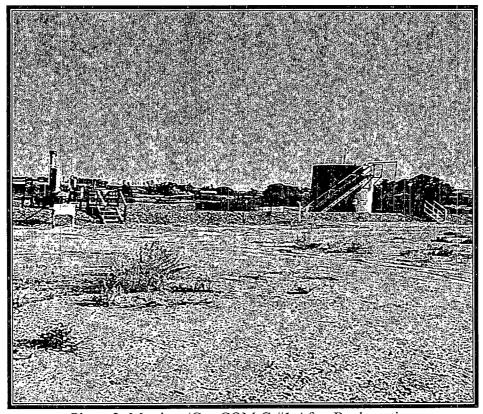


Photo 2: Martinez Gas COM G #1 After Reclamation