District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-144 Revised June 6, 2013

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office. For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Below-Grade Tank, or
19277 Proposed Alternative Method Permit or Closure Plan Application
Type of action: Polouv grade tank registration
Permit of a pit or proposed alternative method
45-31097 Permit of a pit or proposed alternative method Closure of a pit, below-grade tank, or proposed alternative method DIST. 3
☐ Modification to an existing permit/or registration
Closure plan only submitted for an existing permitted or non-permitted pit, below-grade tank,
or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
Operator: XTO Energy Inc OGRID #: 5380
Address: 382 Road 3100 Aztec, NM 87410
Facility or well name: Florance #62F
API Number: 30-045-31097 OCD Permit Number: '1392'
U/L or Qtr/Qtr: F Section 20 Township: 27N Range: 8W County: San Juan
Center of Proposed Design: Latitude 36.56083 Longitude -107.70722 NAD: 1927 \(\bigcirc 1983
Surface Owner: Seederal State Private Tribal Trust or Indian Allotment
Surface Owner: M rederal M State M Private M I float Trust or Indian Allotment
2.
Pit: Subsection F, G or J of 19.15.17.11 NMAC
Temporary: Drilling Workover
Permanent Emergency Cavitation P&A Multi-Well Fluid Management Low Chloride Drilling Fluid yes no
Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other
☐ String-Reinforced
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D
3.
Below-grade tank: Subsection I of 19.15.17.11 NMAC
Volume: 120 bbl Type of fluid: Produced Water
Tank Construction material: Steel
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other
Liner type: Thickness mil
4. Alternative Method:
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.
5.
Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence. school, hospital,
institution or church)

☐ Alternate. Please specify_

Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)				
☐ Screen ☐ Netting ☐ Other ☐ Monthly inspections (If netting or screening is not physically feasible)				
	·			
Signs: Subsection C of 19.15.17.11 NMAC 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers Signed in compliance with 19.15.16.8 NMAC				
Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.				
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accematerial are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	ptable source			
General siting				
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - □ NM Office of the State Engineer - iWATERS database search; □ USGS; □ Data obtained from nearby wells	Yes No			
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells				
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No			
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No			
 Within an unstable area. (Does not apply to below grade tanks) Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No			
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	Yes No			
Below Grade Tanks				
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No			
Vithin 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site □ Yes □				
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)				
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No			
/ithin 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial polication.				
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image				
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No			

	,				
 Within 100 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	Yes No				
Temporary Pit Non-low chloride drilling fluid					
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image					
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				
Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				
Permanent Pit or Multi-Well Fluid Management Pit					
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				
 Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	☐ Yes ☐ No				
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 N Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the doc attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number: or Permit Number:	NMAC 15.17.9 NMAC				
II. Multi Wall Fluid Management Bit Checklist. Subsection B of 10 15 17 0 NMAC					
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the doc attached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number: or Permit Number:	.15.17.9 NMAC				
Tremously Approved Design (unual exp.) of design,					

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the	documents are			
attached. ☐ Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC ☐ Climatological Factors Assessment ☐ Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Quality Control/Quality Assurance Construction and Installation Plan ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC ☐ Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Nuisance or Hazardous Odors, including H₂S, Prevention Plan ☐ Emergency Response Plan ☐ Oil Field Waste Stream Characterization ☐ Monitoring and Inspection Plan ☐ Erosion Control Plan ☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC				
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.				
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well F	luid Management Pit			
Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method				
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be closure plan. Please indicate, by a check mark in the box, that the documents are attached. □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC				
15. Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. F 19.15.17.10 NMAC for guidance.				
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA			
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Yes No NA				
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells NA				
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa ake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site				
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image				
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence to the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site				
Vritten confirmation or verification from the municipality; Written approval obtained from the municipality ☐ Yes ☐ No				
/ithin 300 feet of a wetland. S Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Yes No				
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance				

adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality					
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division					
Within an unstable area.					
 Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	Yes No				
Within a 100-year floodplain FEMA map	Yes No				
16.	l				
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17. Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cann Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	11 NMAC 15.17.11 NMAC				
17. Operator Application Certification:					
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and believes	ief.				
Name (Print): Title:					
Signature: Date:					
e-mail address: Telephone:					
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Approval Date:					
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Approval Date:					
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Approval Date: OCD Permit Number: OCD Permit Number: Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not section of the form until an approved closure plan has been obtained and the closure activities have been completed.	the closure report.				
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Approval Date: OCD Permit Number: OCD Permit Number: Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not	the closure report.				
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Approval Date: OCD Permit Number: OCD Permit Number: Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not section of the form until an approved closure plan has been obtained and the closure activities have been completed.	the closure report.				
18. OCD Approval: Permit Application (including closure plan) Permit Application (including closure plan) Permit Application (including closure plan) Permit Approval Permit Application (including closure plan) Permit Approval Date: OCD Representative Signature:	the closure report. complete this op op systems only) dicate, by a check				

Form C-144 Oil Conservation Division Page 5 of 6

Operator Closure Certification:	
I hereby certify that the information and attachments submitted with this closure report belief. I also certify that the closure complies with all applicable closure requirements:	
Name (Print): James McDaniel	Title: EHS Supervisor
Signature:	Date: 10/10/14
e-mail address: James McDaniel@xtoenergy.com	Telephone: (505) 333-3701

District I · 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Submit 1 Copy to appropriate District Office in

Form C-141

Revised August 8, 2011

Oil Conservation Division Santa Fe, NM 87505

	accordance with 19.15.29 NMAC
1220 South St. Francis Dr.	accordance with 15.15.25 NWAC
Conta Da NIM 07505	

	Release Notification and Corrective Action											
OPERATOR							al Report		Final Report			
Name of Co	ompany: X	TO Energy	Inc.		Conta	ct: Ja	mes McDaniel					
Address: 38	Road 31	00, Aztec, I	New Mex	ico 87410	Telep	hone 1	No.: (505) 333-3	3701				
Facility Nat	me: Florar	rce #62F					e: Gas Well (M		·de)			
Surface Ow	ner: BLM			Mineral Ov	wner				API No	. 30-045-3	1097	
				LOCA	TION OF	REI	LEASE					
Unit Letter	nit Letter Section Township Range Feet from the North/South Line Feet from the Ea					Vest Line	County					
F	20	<u>2</u> 7N	8W	2360	FNL		1923	F	WL	San Juan		
				Latitude: N 36	URE OF 1	<u>rel</u> j	EASE					
Type of Rele		ed Water					Release: Unknow			tecovered:	~	
Source of Re	lease: BGT					e and F nown	lour of Occurrenc	e:	Date and 3/13/2009	Hour of Dis	covery	:
Was Immedi	ate Notice (ES, To	Whom?					-
			Yes _	No Not Req	uired N/A							ļ
By Whom?						and F						
Was a Water	course Reac			1.51	lf Y	ES, Vo	lume Impacting t	he Wate	rcourse.			
			Yes 🛚	No								
If a Watercourse was Impacted, Describe Fully.*												
Describe Cause of Problem and Remedial Action Taken.* The below grade tank was taken out of service at the Florance #62F well site due to upgrades at this well site. A composite sample was collected beneath												
the location of the on-site BGT, and submitted for laboratory analysis for TPH via USEPA Method 418.1, Benzene and BTEX via USEPA Method 8021, and for total chlorides. The sample returned results below the 'Pit Rule' spill confirmation standards for, Benzene, Total BTEX and total chlorides, but												
	above the 100 ppm TPH standard, confirming that a release has occurred at this location.											
		and Cleanup A				100410	····					
		rmed for this								_		
				is true and comple								
				nd/or file certain rel								
				e of a C-141 report investigate and rer								
or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.												
Signature: OIL CONSERVATION DIVISION												
Printed Name: James McDaniel Approved by Environmental Specialist:												
Title: EHS S	upervisor				Approv	val Dat	e:	Expiration Date:				
E-mail Addre	ess: James_	McDaniel@x	ktoenergy.	com	Condit	ions of	Approval:			Attached	П	
Date: TO	10/14	.]		Phone: 505-333-37	701						·J	

^{*} Attach Additional Sheets If Necessary

XTO Energy Inc. San Juan Basin Below Grade Tank Closure Report

Lease Name: Florance #62F API No.: 30-045-31097

Description: Unit F, Section 20, Township 29N, Range 8W, San Juan County

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure requirements of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

1. XTO will close below-grade tanks within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.

Closure Date is March 13, 2009

2. XTO will close a below-grade tank that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.

Closure Date is March 13, 2009

3. XTO will close a permitted below-grade tank within 60 days of cessation of the below-grade tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on form C-144.

Required C-144 Form is attached to this document.

4. XTO will remove liquids and sludge from below-grade tanks prior to implementing a closure method and will dispose of the liquids and sludge in a division-approved facility. Approved facilities and waste streams include:

Envirotech Permit No. NM01-0011 and IEI Permit No. NM 01-0010B

Soil contaminated by exempt petroleum hydrocarbons

Produced sand, pit sludge and contaminated bottoms from storage of exempt

wastes Basin Disposal Permit No. NM01-005

Produced water

All liquids and sludge were removed from the tank prior to closure activities.

5. XTO will remove the below-grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.

XTO has removed the below grade tank, and will dispose of it at a division approved facility, or recycle, reclaim or reuse it in a manner that is approved by the division.

6. XTO will remove any on-site equipment associated with a below-grade tank unless the equipment is required for some other purpose.

Equipment will remain on-site for the continued production of oil and gas

7. XTO will test the soils beneath the below-grade tank to determine whether a release has occurred. At a minimum 5 point composite sample will be collected along with individual grab samples from any area that is wet, discolored or showing other evidence of a release. Samples will be analyzed for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. XTO will notify the division of its results on form C-141.

A five point composite sample was taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Test Method	Limit (mg/Kg)	Results
Benzene	EPA SW-846 8021B or 8260B	0.2	< 0.0009 mg/kg
BTEX	EPA SW-846 8021B or 8260B	50	< 0.0042mg/kg
TPH	EPA SW-846 418.1	100	1,870 mg/kg
Chlorides	EPA 300.1	250 or background	130 mg/kg

8. If XTO or the division determines that a release has occurred, XTO will comply with 19.15.3.116 NMAC and 19.15.1.19NMAC as appropriate.

Due to a TPH result of 1,870 ppm, a release has been confirmed for this location. A C-141 Release Notification and Corrective Action Form will be submitted outlining any remediation activities.

9. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, XTO will backfill the excavation with compacted, non-waste containing, earthen material; construct a division prescribed soil cover; recontour and re-vegetate the site.

The pit cellar was backfilled using compacted, non-waste containing earthen material, with a division prescribed soil cover.

- 10. Notice of Closure operations will be given to the Aztec Division District III office between 72 hours and one week prior to the start of closure activities via email or verbally.

 The notification will include the following:
 - i. Operator's name
 - ii. Well Name and API Number
 - iii. Location by Unit Letter, Section, Township, and Range

Due to a misunderstanding regarding the 'pit rule' in 2008-2009, the proper notifications were not made prior to the beginning of closure activities. This misunderstanding has been corrected, and proper notifications are made currently.

The surface owner shall be notified of XTO's proposal to close the BGT as per the approved closure plan using certified mail, return receipt requested.

Due to a misunderstanding regarding the 'pit rule' in 2008-2009, the proper notifications were not made prior to the beginning of closure activities. This misunderstanding has been corrected, and proper notifications are made currently.

11. Re-contouring of location will match fit, shape, line, form and texture of the surrounding area. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be placed in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The location will be recontoured to match the above specifications.

12. A minimum of 4 feet of cover shall be achieved and the cover shall include 1 foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The site has been backfilled to match these specifications.

13. XTO will seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will be used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

The site will be reclaimed pursuant to the BLM MOU.

- 14. All closure activities will include proper documentation and be available for review upon request and will be submitted in closure report form to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on form C-144 and incorporate the following:
 - i. Proof of closure notice to division and surface owner; Not made
 - ii. Details on capping and covering, where applicable; per OCD Specifications
 - iii. Inspection reports; attached
 - iv. Confirmation sampling analytical results; attached
 - v. Disposal facility name(s) and permit number(s); see above
 - vi. Soil backfilling and cover installation; per OCD Specifications
 - vii. Re-vegetation application rates and seeding techniques, (or approved alternative to re-vegetation requirements if applicable); **NA**.
 - viii. Photo documentation of the site reclamation. attached
- 15. This closure report is being submitted after the 60 day deadline required by the 'Pit Rule' due to a misunderstanding of the 'Pit Rule' in 2008-2009



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	XTO Energy	Project #:	98031-0121
Sample ID:	BGT Cellar	Date Reported:	03-13-09
Laboratory Number:	49276	Date Sampled:	03-06-09
Chain of Custody:	5623	Date Received:	03-10-09
Sample Matrix:	Soil	Date Analyzed:	03-12-09
Preservative:	Cool	Date Extracted:	03-11-09
Condition:	Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)	
Benzene	ND	0.9	
Toluene	ND	1.0	
Ethylbenzene	ND	1.0	
p,m-Xylene	ND	1.2	
o-Xylene	ND	0.9	
Total BTEX	ND		

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery		
	Fluorobenzene	99.0 %		
	1,4-difluorobenzene	99.0 %		
	Bromochlorobenzene	99.0 %		

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Florance #62F BGT Cellar.

Analyst

Review



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	N/A	Project #:	N/A
Sample ID:	03-12-BT QA/QC	Date Reported:	03-13-09
Laboratory Number:	49286	Date Sampled:	N/A
Sample Matrix:	Soil	Date Received:	N/A
Preservative:	N/A	Date Analyzed:	03-12-09
Condition:	N/A	Analysis:	BTEX

Calibration and the Con	MACHET WILL CALLET			L Slanker	V 1 v Detect
senetectious awite (regit)		enemesarisen			Mar estimites
Benzene	5.5071E+004	5.5181E+004	0.2%	ND	0.1
Toluene	5.2032E+004	5.2136E+004	0.2%	ND	0.1
Ethylbenzene	4.7809E+004	4.7905E+004	0.2%	ND	0.1
p,m-Xylene	1.0595E+005	1.0616E+005	0.2%	ND	0.1
o-Xylene	4.6951E+004	4.7045E+004	0.2%	ND	0.1

Truplicates concellus/Kg) and the	Samole Market	jijijeate	e Wolfe	Week purplying	e Date de Linia
Benzene	13.5	14.7	8.9%	0 - 30%	0.9
Toluene	14.6	13.7	6.2%	0 - 30%	1.0
Ethylbenzene	4.7	4.6	2.1%	0 - 30%	1.0
p,m-Xylene	11.2	9.5	15.2%	0 - 30%	1.2
o-Xylene	9.1	8.0	12.1%	0 - 30%	0.9

fre Samplette : Amo	un Spiked ASpik	ed Sample.	ValRecovery.	as Acceptificance
13.5	50.0	59.1	93.1%	39 - 150
14.6	50.0	61.6	95.4%	46148
4.7	50.0	53.7	98.2%	32 - 160
11.2	100	109	98.2%	46 - 148
9.1	50.0	56.8	96.1%	46 - 148
	13.5 14.6 4.7 11.2	13.5 50.0 14.6 50.0 4.7 50.0 11.2 100	13.5 50.0 59.1 14.6 50.0 61.6 4.7 50.0 53.7 11.2 100 109	14.6 50.0 61.6 95.4% 4.7 50.0 53.7 98.2% 11.2 100 109 98.2%

ND - Parameter not detected at the stated detection limit.

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using

Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996.

Comments:

QA/QC for Samples 49267 - 49270, 49276 - 49280, and 49286.

Analyst



EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	XTO Energy	Project #:	98031-0121
Sample ID:	Florance #62F B.G.T. Cellar	Date Reported:	03-13-09
Laboratory Number:	49276	Date Sampled:	03-06-09
Chain of Custody No:	5623	Date Received:	03-10-09
Sample Matrix:	Soil	Date Extracted:	03-11-09
Preservative:	Cool	Date Analyzed:	03-11-09
Condition:	Intact	Analysis Needed:	TPH-418.1

		Det.
3	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

1,870

5.0

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Florance #62F B.G.T. Celiar.

Analyst Mulen

Mister Walter



EPA METHOD 418.1 TOTAL PETROLEUM HYROCARBONS QUALITY ASSURANCE REPORT

Client: Sample ID:	QA/QC QA/QC	Project #: Date Reported:	N/A 03-13-09
Laboratory Number:	03-11-TPH.QA/QC 49276	Date Sampled:	N/A
Sample Matrix:	Freon-113	Date Analyzed:	03-11-09
Preservative:	N/A	Date Extracted:	03-11-09
Condition:	N/A	Analysis Needed:	TPH

Calibration	I-Cal Date	C-Cal Date	I-Cal RF:	C-Cal RF:	% Difference	Accept. Range		
	03-09-09	03-11-09	1,373	1,430	4.2%	+/- 10%		

Blank Conc. (mg/Kg)	Concentration		Detection Lim	tion Limit			
ТРН	ND		16.5				
Duplicate Conc. (mg/Kg)	Sample	Duplicate	% Difference	Accept. Range			
TPH	1 870	2 030	8 5%	+/- 30%			

Spike Conc. (mg/Kg)	Sample	Spike Added	Spike Result	% Recovery	Accept Range
TPH	1,870	2,000	3,510	90.7%	80 - 120%

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

QA/QC for Samples 49276 - 49282, 49286 and 49290.



Chloride

XTO Energy Client: Project #: 98031-0121 Florance #62F B.G.T. Cellar 03-13-09 Sample ID: Date Reported: Lab ID#: 49276 Date Sampled: 03-06-09 Sample Matrix: Soil Date Received: 03-10-09 Preservative: Cool Date Analyzed: 03-12-09 Condition: Intact Chain of Custody: 5623

Parameter Concentration (mg/Kg)

Total Chloride 130

Reference: U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983.

Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: Florance #62F B.G.T. Cellar.

Review

CHAIN OF CUSTODY RECORD

Client:			Project Name / L	ocation							عدا و			# 64 65E									
)			•			<u>-</u> Λ							,	ANAL	YSIS	/ PAR	AMET	ERS					
XTO ENE	Ray		FLORANCE Sampler Name:	-62	F 873	1.1. CE	u	KE		Τ —	1	1	· · · · ·	ı —		1	l	$\overline{}$	ĺ	1			\dashv
Client Address: 382 だらみし	31001		•						15)	BTEX (Method 8021)	VOC (Method 8260)												
AZTEC NM. Client Phone No.:	87410	2		iet					88	8g	8	इह	_		<u>Q</u>					İ		_ [ا پر
		}	Client No.:	.) g	eg.	ğ	Vet	ie		Ĭ	l 	3.1)	핃		- }		8	ntac
505 - 333 - 320 Sample No./	7		98	703	-01	21		·	TPH (Method 8015)	3	[Me	RCRA 8 Metals	Cation / Anion		TCLP with H/P		TPH (418.1)	CHLORIDE		1		Sample Cool	Sample Intact
Sample No./ Identification		Sampl	e lab No	S	ample	No./Volume			리 공	Ĕ	ပ္က	CH/C	atio	윤	片	PAH	푼	물				air	amb
FLORANCE # 625	Date	Time		$\overline{}$	//atrix	ot Containers	HgCL	HCI	<u> </u>	m	>	m m	Ö	Œ	Ĕ	<u>a</u>	F	Ö				Š	Š
B.G.T. CEWAR		12:00	49276	Solid	Sludge Aqueous	2)402 JA				X							X	χ		Į		x	x
die Gent Court	V 8	12.00	1/2/0	Soil	Sludge	E) HOS JA	-		 	^				<u> </u>		 -	- ,	^			一十	-	
				Solid	Aqueous												•						
				Soil	Sludge																		
				Solid	Aqueous				<u> </u>		ļ											-	
				Soil Solid	Sludge Aqueous																		
				Soil	Sludge																		
CPS N36°33.6	39 W	107 4	2.421	Solid	Aqueous	-	<u> </u>		<u> </u>			ļ											
				Soil Solid	Sludge Aqueous																		
				Soil Solid	Sludge Aqueous																		
			·	Soil Solid	Sludge Aqueous																		
				Soil	Sludge				 											1	_		
				Solid	Aqueous		<u> </u>				ļ		., ,										
1.	. 1			Soil Solid	Sludge Aqueous																		ŀ
Relinquished by: (Signa	ture/			<u> </u>	Date	Time	F	lL Recejv	ed by:	(Sign	ature)	l		L	L	I	J	l		Da	te	Tim	ie
Lat # 11	hIM	4)			3-10	1:45		V		Ma										~-/	0/09	121	U
Relinquished by: (Signa	ture)				270	10.10	F	~ Receiv	ed by:	(Sign	थामहो									-	101	(2)	23
. , , ,	•					77	'		(معنشر ر)												
Relinquished by: (Signa	ture)			***************************************			F	Receiv	ed by:	(Sign	ature)							<u></u>					\dashv
							- F		p r	10	~		₻-	Mr	····	P		rs '	το	•	·		
				•	ENVI	KU					_ +						KST			~			
				i									-	-WK	\ \ \/	ハンと	Ω	141	٠١	5			
			5796 U.S	S. High	way 64 •	Farming	iton	, NM	8740)1 •	Tel	505-	632-	0618	5 K-1	m	L#	AM	/ 13 N	0			



Well Below Tank Inspection Report

RouteName	StopName	Pumper	Foreman	WellName		APIWellNumber		Section	Range	Township	
DEN NM Run 41	FLORANCE 062F	Griswold, Brad	Mulnix, John	FLORANCE 62F		3004531097		20	8W	27N	
InspectorName Inspection Date	Inspection Visible Time LinerTears	VisibleTankLeak Overflow	Collection OfSurfaceRun	Visible LayerOil	Visible Leak	Freeboard EstFT	PitLocation	PitType	Notes		
PETER SCHMIDT 07/22/2008	11:33 No	Yes	Yes	Yes	No	2			PRODU	CTION F	PIT
SHAWN ERRETT 08/20/2008	09:30 No	Yes	Yes	Yes	No	3			PRODUC	CTION F	PIT
SHAWN ERRETT 09/29/2008	14:56 No	Yes	Yes	Yes	No	3			PRODUC	CTION F	ΉT
KEN ALLEN 10/15/2008	12:26 No	Yes	Yes	Yes	No	3	Well Water Pit	Below Ground	PRODUC	CTION F	PIΤ
KEN ALLEN 11/20/2008	13:50 No	Yes	Yes	Yes	No	3	Well Water Pit	Below Ground	PRODUC	CTION P	PIT
SE 12/11/2008	11:45 No	Yes	Yes	Yes	No	4	Well Water Pit	Below Ground	PRODUC	CTION F	ΉT
SE 01/08/2009	10:40 No	Yes	Yes	Yes	No	2	Well Water Pit	Below Ground	PRODUC	CTION P	TI
ES 02/26/2009	01:30 No	Yes	Yes	Yes	No	2	Well Water Pit	Below Ground	PRODUC	CTION F	ΊΤ
ES 03/25/2009	11:05 No	Yes	Yes	Yes	No	4	Well Water Pit	Below Ground	PRODUC	CTION F	TI
ES 04/28/2009	11:55 No	No	No	Yes	No	3	Well Water Pit	Above Ground	PRODUC	CTION P	TI
ES 05/20/2009	10:55 N o	No	No	Yes	No	3	Well Water Pit	Above Ground	PRODUC	CTION P	ΉT
ES 06/23/2009	10:20 No	No	No	Yes	No	4	Well Water Pit	Above Ground	PRODUC	CTION P	TIT
VM 07/28/2009	11:17 No	No	No	Yes	No	4	Well Water Pit	Above Ground	PRODUC	CTION P	TI
ES 08/21/2009	11:30 No	No	No	Yes	No	1	Well Water Pit	Above Ground	PRODUC	CTION P	TI
ES 03/27/2010	11:00 No	No	No	Yes	No	2	Well Water Pit	Above Ground	PRODUC	CTION P	riΤ
ES 04/22/2010	11:00 No	No	No	Yes	No	3	Well Water Pit	Above Ground	PRODUC	CTION P	TI
ES 05/13/2010	11:00 No	No	No	Yes	No	2	Well Water Pit	Above Ground	PRODUC	CTION P	TI
ES 06/07/2010	11;00 No	No	No	Yes	No	2	Well Water Pit	Above Ground	PRODUC	CTION P	riΤ
ES 07/14/2010	11:00 No	No	No	Yes	No	5	Well Water Pit	Above Ground	PRODUC	CTION P	TI
ES 08/13/2010	11:00 No	No	No	Yes	No	5	Well Water Pit	Above Ground	PRODUC	CTION P	TI
ES 09/14/2010	11:00 No	No	No	Yes	No	2	Well Water Pit	Above Ground	PRODUC	CTION P	ΊΤ
ES 10/14/2010	11:00 No	No	No	Yes	No	4	Well Water Pit	Above Ground	PRODUC	CTION P	ΊΤ
ES 11/15/2010	11:00 N o	No	No	Yes	No	4	Well Water Pit	Above Ground	PRODUC	CTION P	Τi
ES 12/20/2010	11:00 No	No	No	Yes	No	2	Well Water Pit	Above Ground	PRODUC	CTION P	ΊΤ
ES 01/12/2011	11:00 No	No	No	Yes	No	3	Well Water Pit	Above Ground	PRODUC	CTION P	ΊΤ
ES 02/09/2011	11:00 No	No	No	Yes	No	3	Well Water Pit	Above Ground	PRODUC	CTION P	IT.
ES 03/17/2011	11:00 No	No	No	Yes	No	3	Well Water Pit	Above Ground	PRODUC	CTION P	IT
ES 04/19/2011	11:00 No	No	No	Yes	No	4	Well Water Pit	Above Ground	PRODUC	CTION P	IT
ES 05/05/2011	11:00 No	No	No	Yes	No	3	Well Water Pit	Above Ground	PRODUC	CTION P	IT.

XTO Energy Inc. Florance #62F (30-045-31097) Section 20 (F), Township 27N, Range 8W Closure Date: March 13, 2009

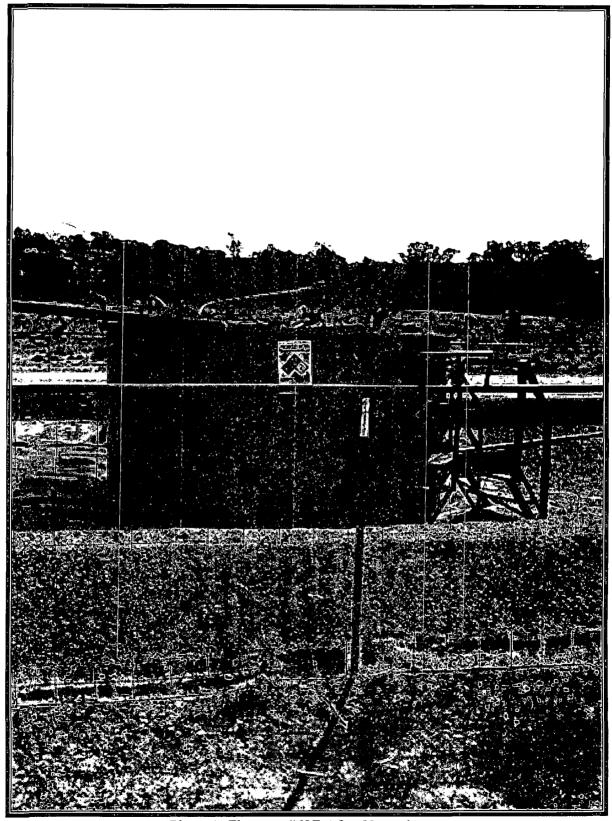


Photo 1: Florance #62F After Upgrade

XTO Energy Inc. Florance #62F (30-045-31097) Section 20 (F), Township 27N, Range 8W

Closure Date: March 13, 2009



Photo 2: Florance #62F After Upgrade