



AUG 06 2015

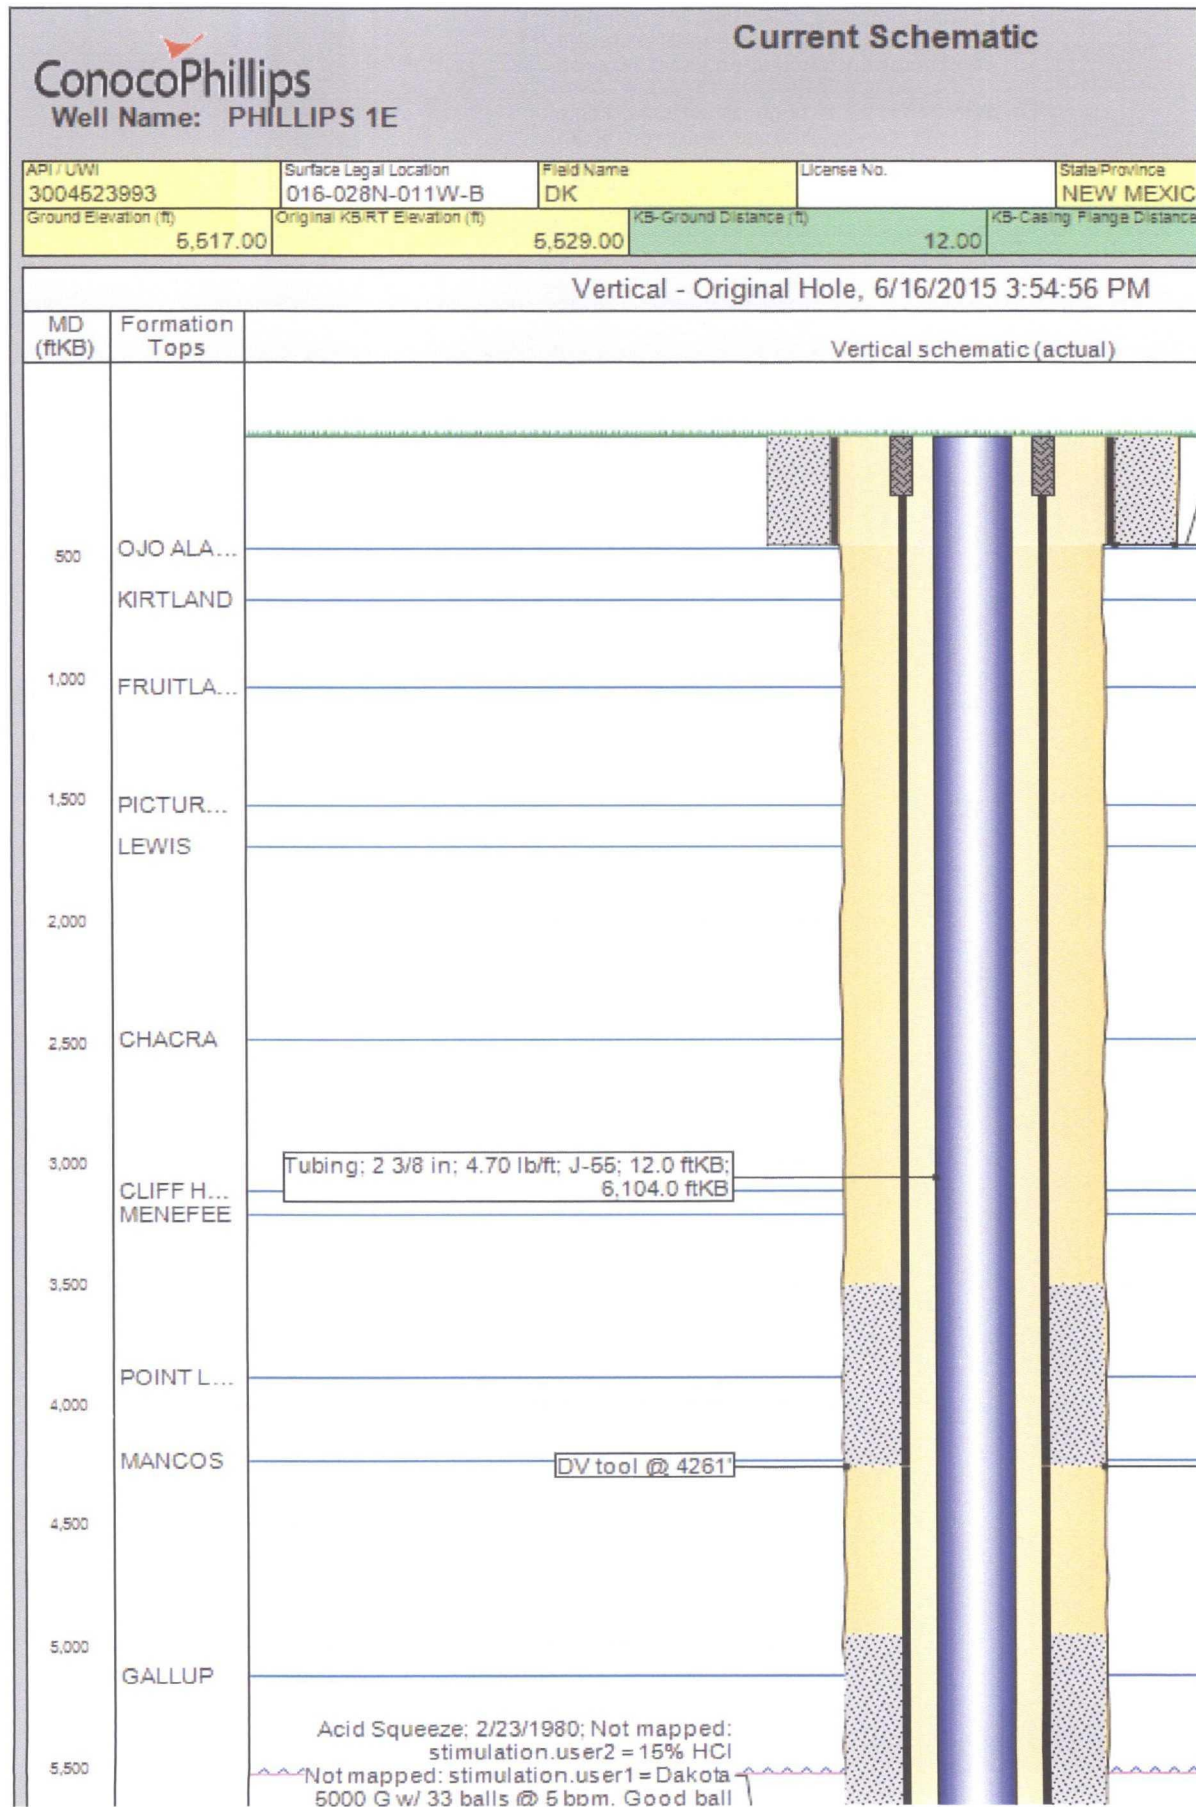

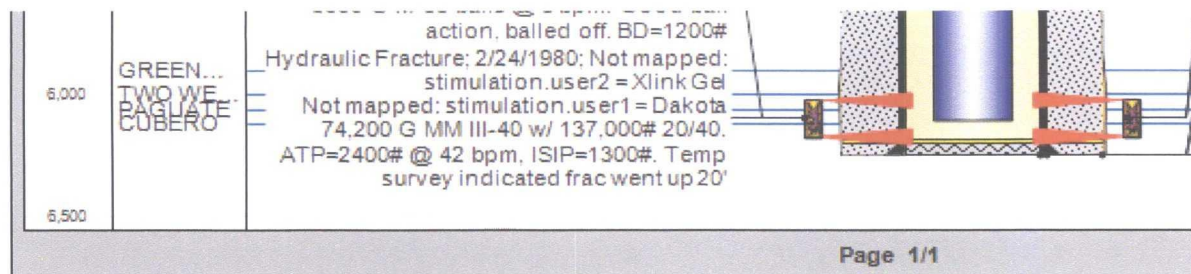

O	Well Configuration Type Vertical
i (ft) 5,629.00	KB-Tubing Hanger Distance (ft) 5,629.00

1; Surface; 8 5/8 in; 8.097 in; 12.0 ftKB;
453.0 ftKB

Surface Casing Cement; 12.0-453.0;
1/16/1980; Cmt'd w/285 sx Class B. Cmt
circ'd.

Production Casing Cement; 3,500.0-
4,261.0; 1/27/1980; Cmt'd w/450 sxs 65/35
POZ, good circthroughout.

PERF - DAKOTA; 6,020.0-6,166.0;
1/20/1997
PERF - DAKOTA; 6,021.0-6,174.0;
2/22/1980

CEMENT PLUG: 6,200.0-6,247.0;
2/21/1980; Fill @ 6170', 1/18/97.
2; Production1; 4 1/2 in; 4,000 in; 12.0 ftKB;
6,247.0 ftKB
Production Casing Cement: 4,950.0-
6,247.0; 1/27/1980; 1st stage cmt'd w/175
sxs Class B. Good mud returns with
cementing.

Report Printed: 6/16/2015