

submitted in lieu of Form 3160-5

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Sundry Notices and Reports on Wells

RECEIVED

MAY 27 PM 12: 03

070 Farmington, NM

1. Type of Well
Gas

5. Lease Number
NM-89783
6. If Indian, All. or
Tribe Name

2. Name of Operator
JM Huber

7. Unit Agreement Name

3. Address & Phone No. of Operator
1050 17th Street, Denver, CO 80265 303-825-7900

8. Well Name & Number
Chicosa 35 #1

Location of Well, Footage, Sec., T, R, M

660' FNL and 660' FEL, Sec. 35, T-31-N, R-4-W,

9. API Well No.
30-039-26422
10. Field and Pool
Basin Fruitland Coal

11. County & State
Rio Arriba County, NM

12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OTHER DATA

Type of Submission

☒ Notice of Intent

☐ Subsequent Report

☐ Final Abandonment

Type of Action

☒ Abandonment

☐ Recompletion

☐ Plugging Back

☐ Casing Repair

☐ Altering Casing

☐ Other -

☐ Change of Plans

☐ New Construction

☐ Non-Routine Fracturing

☐ Water Shut off

☐ Conversion to Injection

13. Describe Proposed or Completed Operations

JM Huber plans to plug and abandon this well per the following procedure.

1. Prepare blow pit. MOL and RU daylight pulling unit. Conduct safety meeting for all personnel on location. NU relief line and blow down well; kill with water as necessary. Pick up on rods. Re-seat pump and pressure test tubing to 1000 psi. POH and LD rods and pump. ND wellhead and NU BOP. Test BOP. TOH and tally 3765' of 2-3/8" tubing. Round trip 7" casing scraper or wireline gauge ring to 3700'.
2. Plug #1 (Fruitland Coal open hole interval, 3678' - 3628'): Set a 7" CIBP or CR at 3678'. Pressure test casing to 500#. If casing does not test, then spot or tag subsequent plugs as appropriate. Mix 20 sxs cement and spot above CIBP. PUH with tubing to 3330'.
3. Plug #2 (Kirtland and Ojo Alamo tops, 3330' - 2990'): Mix 76 sxs and spot a balanced plug inside the 7" to cover the Kirtland and Ojo Alamo tops. PUH with tubing to 1950'.
4. Plug #3 (Nacimiento top, 1950' - 1850'): Mix 29 sxs and spot a balanced plug inside the 7" to cover the Nacimiento top. PUH with tubing to 333'.
5. Plug #4 (9-5/8" shoe and surface, 333' - Surface): Mix 75 sxs and spot a balanced plug inside the 7" to cover the 9-5/8" casing shoe and circulate good cement out casing valve. POH and LD tubing.
6. ND BOP and cut off casing below surface. Install P&A marker with cement to comply with regulations. RD, move off location, cut off anchors and restore location.

14. I hereby certify that the foregoing is true and correct.

Signed Thomas M. Mason Title 5/20/03 Date 5/13/03

(This space for Federal or State Office use)

APPROVED BY Original Signed: Stephen Mason Title _____
CONDITION OF APPROVAL, if any:

Date MAY 29 2003

NMOC

Chicosa 35 #1 Proposed P&A

Basin Fruitland Coal

NE, Section 35, T-31-N, R-4-W, Rio Arriba County, NM

API # 30-039-26422

Today's Date: 5/13/03

Spud: 7/22/00

Completed: 9/7/00

Elevation: 7005' GL

Nacimiento @ 1900'

Ojo Alamo @ 3040'

Kirtland @ 3280'

Fruitland @ 3728'

12-1/4" hole

8-3/4" Hole

6-1/4" Hole

TD 3862'

9-5/8" 36# J-55 Casing set @ 283'
Cement with 150 sxs (176 cf)
Cement circulated to surface

Plug #4: 333' – Surface
Cement with 75 sxs

Plug #3: 1950' – 1850'
Cement with 29 sxs


Plug #2: 3330' – 2990'
Cement with 76 sxs

Plug #1: 3678' – 3628'
Cement with 20 sxs

Cmt Retainer @ 3678'

7" 20#, J-55 Casing set @ 3728'
Cement with 540 sxs (1009 cf)
Cement circulated to surface

Fruitland Coal Open Hole:
3728' – 3862'

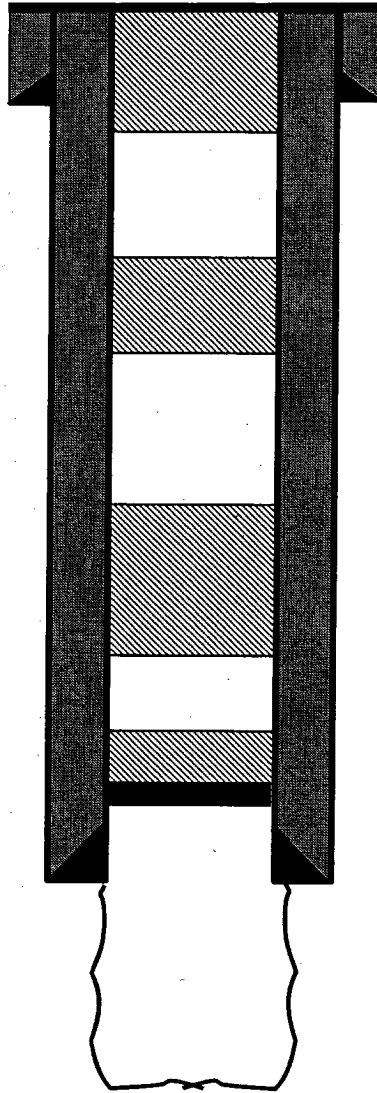

Chicosa 35 #1

Current

Basin Fruitland Coal

NE, Section 35, T-31-N, R-4-W, Rio Arriba County, NM

API # 30-039-26422

Today's Date: 5/13/03

Spud: 7/22/00

Completed: 9/7/00

Elevation: 7005' GL

Nacimiento @ 1900'

Ojo Alamo @ 3040'

Kirtland @ 3280'

Fruitland @ 3728'

12-1/4" hole

8-3/4" Hole

6-1/4" Hole

9-5/8" 36# J-55 Casing set @ 283'
Cement with 150 sxs (176 cf)
Cement circulated to surface

Well History

10/02: 2-3/8" tubing with rods and pump run in well to 3765'.

2-3/8" Tubing @ 3765'
(rods and pump)

7", 20#, J-55 Casing set @ 3728'
Cement with 540 sxs (1009 cf)
Cement circulated to surface

Fruitland Coal Open Hole:
3728' - 3862'

TD 3862'