District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division

1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-144 Revised June 6, 2013

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.

For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Below-Grade Tank, or
1420 6 Proposed Alternative Method Permit or Closure Plan Application
Type of action: Below grade tank registration Permit of a pit or proposed alternative method Closure of a pit, below-grade tank, or proposed alternative method MAR 1 5 2016 Closure plan only submitted for an existing permitted or non-permitted pit, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the
environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
Operator: BP America Production Company OGRID #: 778
Address: 200 Energy Court, Farmington, NM 87401
Facility or well name: Gallegos Canyon Unit 233E
API Number: 3004526210 OCD Permit Number:
U/L or Qtr/Qtr J Section 27 Township 28N Range 12W County: San Juan
Center of Proposed Design: Latitude 36.63136 Longitude -108.09604 NAD: □1927 ☑ 1983 Surface Owner: ☐ Federal □ State □ Private ☑ Tribal Trust or Indian Allotment
Pit: Subsection F, G or J of 19.15.17.11 NMAC Temporary: Drilling Workover Permanent Emergency Cavitation P&A Multi-Well Fluid Management Low Chloride Drilling Fluid yes no Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other String-Reinforced Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D
3.
☑ Below-grade tank: Subsection I of 19.15.17.11 NMAC TANK A Volume: 95 bbl Type of fluid: Produced water
Tank Construction material: Steel
☐ Secondary containment with leak detection ☐ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other <u>Double walled/double bottom; no visible sidewalls</u>
Liner type: Thicknessmil
4. Alternative Method:



Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)	
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church)	hospital,
Four foot height, four strands of barbed wire evenly spaced between one and four feet	
Alternate. Please specify	7
6. Notified Subsection F of 10.15.17.11 NIMAC (Applies to perpendicular vite and perpendicular top taylor)	V-1
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other	
☐ Monthly inspections (If netting or screening is not physically feasible)	
7.	
Signs: Subsection C of 19.15.17.11 NMAC	
☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers ☐ Signed in compliance with 19.15.16.8 NMAC	
Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.	
Please check a box if one or more of the following is requested, if not leave blank: Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
9. Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptance are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	ptable source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area. (Does not apply to below grade tanks) - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	Yes No
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

Form C-144 Oil Conservation Division Page 2 of 6

Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial	Yes No
application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 Natural Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the docattached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	NMAC
11. Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC	
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the document of the instructions: Each of the following items must be attached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	.15.17.9 NMAC
- Territoria de Porte	

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC	dominanto ano
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization	documents are
 ☐ Monitoring and Inspection Plan ☐ Erosion Control Plan ☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC 	
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well F Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method	luid Management Pit
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
s. Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. In 19.15.17.10 NMAC for guidance.	
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa ake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	Yes No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	

adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area.	
 Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No
Within a 100-year floodplain FEMA map	☐ Yes ☐ No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17. Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cann Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	.11 NMAC .15.17.11 NMAC
Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and believe the complete to the best of my knowledge and believe the complete to the best of my knowledge and believe the complete to the best of my knowledge and believe the complete to the best of my knowledge and believe the complete to the best of my knowledge and believe the complete to the best of my knowledge and believe the complete to the best of my knowledge and believe the complete to the best of my knowledge and believe the complete to the best of my knowledge and believe the complete to the best of my knowledge and believe the complete to the best of my knowledge and believe the complete to the best of my knowledge and believe the complete to the best of my knowledge and believe the complete to the best of my knowledge and believe the complete to the best of my knowledge and believe the complete to the best of my knowledge and believe the complete to the best of my knowledge and believe the complete to the best of my knowledge and believe the complete the complete to the best of my knowledge and believe the complete the	
Signature: Date:	50 PF
e-mail address:Telephone:	
OCD Approval: Permit Application (including closure plan) Closure Plan (only). OCD Conditions (see attachment) OCD Representative Signature: Approval Date: 031 Title: OCD Permit Number:	24/2016
Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not section of the form until an approved closure plan has been obtained and the closure activities have been completed.	
☐ Closure Completion Date: 1/15/2016	
20. Closure Method: West Francisco and Bernaud Closure Method Alternative Closure Method West Personal (Closed le	oop systems only)
 Waste Excavation and Removal ☐ On-Site Closure Method ☐ Alternative Closure Method ☐ Waste Removal (Closed-log ☐ If different from approved plan, please explain. 	

		th this closure report is true, accurate and complete to the best of my knowledge and losure requirements and conditions specified in the approved closure plan.
bellet. Talso cer		
Name (Print):	Steve Moskal	Title: Field Environmental Coordinator
Signature:	Steer Wim	Date: March 9, 2016
1	steven.moskal@bp.com	Telephone: (505) 326-9497

BP AMERICA PRODUCTION COMPANY

SAN JUAN BASIN, NORTHWEST NEW MEXICO

BELOW-GRADE TANK CLOSURE PLAN

Gallegos Canyon Unit #233E API No. 3004526210 Unit Letter J, Section 27, T28N, R12W

This plan will address the standard protocols and procedures for closure of below-grade tanks (BGTs) on BP America Production Company (BP) well sites. As stipulated in Paragraph A of 19.15.17.13 NMAC, BP shall close a BGT within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the New Mexico Oil Conservation Division (NMOCD) requires because of imminent danger to fresh water, public health, safety or the environment. If deviations from this plan are necessary, any specific changes will be included on form C-144 and approved by the NMOCD. BP shall close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofit with a BGT that complies with the BP NMOCD approved BGT design attached to the BP Design and Construction Plan. BP shall close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, if not previously retrofitted to comply with the BP NMOCD approve BGT Design attached to the BP Design and Construction Plan, prior to any sale or change in operator pursuant to 19.15.9.9 NMAC. BP shall close the permitted BGT within 60 days of cessation of the BGTs operation or as required by the transitional provisions of Subsection B, D, or E of 19.15.17.17 NMAC.

General Closure Plan

- BP shall notify the surface owner by certified mail that it plans to close a BGT.
 Evidence of mailing of the notice to the address of the surface owner shown in the county tax records demonstrates compliance with this requirement.
 Notice is attached.
- 2. BP shall notify the division District III office verbally or by other means at least 72 hours, but not more than one (1) week, prior to any closure operation. The notice shall include the operator's name, and the location to be closed by unit letter, section, township and range. If the BGT closure is associated with a particular well, then the notice shall also include the well's name, number and API number.

Notice was provided. NMOCD was on site during the removal of the BGT.

- 3. BP shall remove liquids and sludge from the BGT prior to implementing a closure method and dispose of the liquids and sludge in a NMOCD's division-approved facility. The facilities to be used are:
 - a. BP Crouch Mesa Landfarm, Permit NM-02-003 (Solids)
 - b. JFJ Landfarm, Permit NM-01-010(B) (Solids and Sludge)
 - c. Basin Disposal, Permit NM-01-0005 (Liquids)
 - d. Envirotech Inc Soil Remediation Facility, Permit NM-01-0011 (Solids and Sludge)
 - e. BP Operated E.E. Elliott SWD #1, API 30-045-27799 (Liquids)

- f. BP Operated 13 GCU SWD #1, API 30-045-28601 (Liquids)
- g. BP Operated GCU 259 SWD, API 30-045-20006 (Liquids)
- h. BP Operated GCU 306 SWD, API 30-045-24286 (Liquids)
- i. BP Operated GCU 307 SWD, API 30-045-24248 (Liquids)
- j. BP Operated GCU 328 SWD, API 30-045-24735 (Liquids)
- k. BP Operated Pritchard SWD #1, API 30-045-28351 (Liquids)

All liquids and sludge in the BGT were removed and sent to one of the above NMOCD approved facilities for disposal.

4. BP shall remove the BGT and dispose of it in a NMOCD approved facility or recycle, reuse, or reclaim it in a manner that the NMOCD approves. If a liner is present and must be disposed of it will be cleaned by scraping any soils or other attached materials on the liner to a de minimus amount and disposed at a permitted solid waste facility, pursuant to Subparagraph (m) of Paragraph (1) of Subsection C of 19.15.35.8 NMAC. Documentation as to the final disposition of the removed BGT will be provided in the final closure report.

The BGT was transported for recycling.

5. BP shall remove any on-site equipment associated with a BGT unless the equipment is required for well production.

All equipment associated with the BGT has been removed.

6. BP shall test the soils beneath the BGT to determine whether a release has occurred. BP shall collect at a minimum: a five (5) point composite sample and individual grab samples from any area that is wet, discolored or showing other evidence of a release and analyze for BTEX, TPH and chlorides. The testing methods for those constituents are as follows;

Constituents	Testing Method 95 bbl BGT	Release Verification (mg/Kg)	Sample results
Benzene	US EPA Method SW-846 8021B or 8260B	0.2	< 0.039
Total BTEX	US EPA Method SW-846 8021B or 8260B	50	< 0.078
TPH	US EPA Method SW-846 418.1 or 8015 extended	100	<49
Chlorides	US EPA Method 300.0 or 4500B	250 or background	<30

Notes: mg/Kg = milligram per kilogram, BTEX = benzene, toluene, ethylbenzene, and total xylenes, TPH = total petroleum hydrocarbons. Other EPA methods that the division approves may be applied to all constituents listed. Chloride closure standards will be determined by which ever concentration level is greatest.

Soil under the BGT was sampled for TPH, BTEX and chloride. BTEX, TPH and chloride concentrations were below the stated limits. The field report and laboratory reports are attached.

BP shall notify the division District III office of its results on form C-141.
 C-141 is attached.

- If it is determined that a release has occurred, then BP will comply with 19.15.30 NMAC and 19.15.29 NMAC, as appropriate.
 Sampling results indicate no significant release has occurred.
- 9. If the sampling demonstrates that a release has not occurred or that any release does not exceed the concentrations specified above, then BP shall backfill the excavation, with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover, re-contour and re-vegetate the location. The location will be reclaimed if it is not with in the active process area

Sampling results determine no significant release has occurred. Area was backfilled with clean, earthen material.

10. BP shall reclaim the BGT location and all areas associated with the BGT including associated access roads to a safe and stable condition that blends with the surrounding undisturbed area. BP shall substantially restore the impacted surface area to the condition that existed prior to oil and gas operations by placement of the soil cover as provided in Subsection H of 19.15.17.13 NMAC, re-contour the location and associated areas to a contour that approximates the original contour and blends with the surrounding topography and re-vegetate according to Subsection I of 19.15.17.13 NMAC.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned.

11. The soil cover for closures where the BGT has been removed or remediated to the NMOCD's satisfaction shall consist of the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater. The soil cover will be constructed to the site's existing grade and all practicable efforts will be made to prevent ponding of water and erosion of the cover material.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned.

12. BP shall seed the disturbed area the first growing season after closure of the BGT. Seeding will be accomplished by drilling on the contour whenever practical or by other division-approved methods. Vegetative cover will be, at a minimum, 70% of the native perennial vegetative cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation), consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintenance of that cover through two successive growing seasons. During the two growing seasons that prove viability, there shall be no artificial irrigation of the vegetation.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned.

13. BP shall seed, plant and re-seed pursuant to Paragraph (3) of Subsection I of 19.15.17.13 NMAC, until the location successfully achieves the required vegetative cover.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned.

14. Pursuant to Paragraph (5) of Subsection I of 19.15.17.13 NMAC, BP shall notify the NMOCD when it has seeded or planted and when it successfully achieves revegetation.

BP will notify NMOCD when re-vegetation is successful.

- 15. Within 60 days of closure completion, BP shall submit a closure report on NMOCD's form C-144, and will include the following;
 - a. proof of closure notification (surface owner and NMOCD)
 - b. sampling analytical reports; information required by 19.15.17 NMAC;
 - c. disposal facility name and permit number
 - d. details on back-filling, capping, covering, and where applicable re-vegetation application rates and seeding techniques and
 - e. site reclamation, photo documentation.

 Closure report on C-144 form is included including photos of reclamation completion.
- 16. BP shall certify that all information in the report and attachments is accurate, truthful, and compliant with all applicable closure requirements and conditions specified in the approved closure plan.

Certification section of C-144 has been completed.

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Revised August 8, 2011 abmit 1 Copy to appropriate District Office in

Form C-141

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Submit 1 Copy to appropriate District Office in accordance with 19.15.29 NMAC.

			Rel	ease Notifi	catio	n and C	orrective A	ction	
						OPERA	TOR	☐ Init	al Report
Name of C	ompany: B	P				Contact: St	eve Moskal		
Address: 20	00 Energy	Court, Farm	ington, N	M 87401		Telephone	No.: 505-326-94	197	
Facility Na	me: Galleg	gos Canyon I	Jnit 2331	3		Facility Typ	e: Natural gas	well	
Surface Ov	vner: Feder	ral		Mineral (Owner:	Federal		API N	o. 3004526210
				LOCA	ATIO	N OF RE	LEASE		
Unit Letter J	Section 27	Township 28N	Range 12W	Feet from the 1,850	_	h/South Line	Feet from the 1,850	East/West Line East	County: San Juan
			La	atitude 36.63	3136	Longit	ude108.09	0604	
				NAT	TURE	OF REL	EASE		
Type of Rele	ease: none	7,542	fee Tale			Volume of	Release: unknov		Recovered: N/A
Source of Re	elease: belov	w grade tank -	- 95 bbl			Date and I	Hour of Occurrence	ce: Date and	Hour of Discovery: none
Was Immed	iate Notice (Yes 🗵	No □ Not R	equired	If YES, To	Whom?		
By Whom?		17.24 15.71				Date and I	Hour		es the state of
Was a Water	rcourse Read		Yes 🗵	No		If YES, V	olume Impacting	the Watercourse.	
If a Waterco	urse was Im	pacted, Descr	ibe Fully.	*					
				n Taken.* Sampli ld reports and lab				ne during removal	Soil analysis resulted for
Describe Are	ea Affected	and Cleanup	Action Tal	ken.* No action n	ecessar	y. Final labora	tory analysis sup	ported closure of the	ne BGT location.
regulations a public health should their or the enviro	all operators or the envi operations h onment. In a	are required to ronment. The nave failed to	o report a acceptana adequately OCD accep	nd/or file certain in ce of a C-141 report investigate and in	release ort by the remedia	notifications a ne NMOCD m te contaminat	nd perform correct arked as "Final R on that pose a thr	ctive actions for re- deport" does not re- reat to ground water	suant to NMOCD rules and eases which may endanger ieve the operator of liability r, surface water, human health compliance with any other
Signature:	2000	m					OIL CON	SERVATION	DIVISION
Printed Nam		oskal				Approved by	Environmental S	pecialist:	
Title: Field I	Environmen	tal Coordinate	or			Approval Da	te:	Expiration	Date:
E-mail Addr	ess: steven.i	moskal@bp.co	om			Conditions o	f Approval:		Attached

Phone: 505-326-9497

Date: March 9, 2016

^{*} Attach Additional Sheets If Necessary

CLIENT: BP	BLAGG ENGINEERING, INC. P.O. BOX 87, BLOOMFIELD, NM 87 (505) 632-1199	7413	API #: 3004526 TANK ID (if applicble): A	W1=1 -
FIELD REPORT:	(circle one): BGT CONFIRMATION / RELEASE INVESTIGATION / OTHER:	:	PAGE#: _1_ o	f1
SITE INFORMATION QUAD/UNIT: J SEC: 27 TWP: 1/4-1/4/FOOTAGE: 1,850'S / 1,8	28N RNG: 12W PM: NM CNTY: SJ STOTE NW/SE LEASE TYPE: FEDERAL/ STATE / FEE	/ INDIAN	DATE FINISHED: ENVIRONMENTAL	15/16
REFERENCE POINT 1) 95 BGT (DW/DB) 2) 3) 4)	PROD. FORMATION: DK/GP CONTRACTOR: MBF - J. POW	108.09647 DISTANCE/BEA DISTANCE/BEA		JV 5,778' N53E
2) SAMPLE ID:	CHAIN OF CUSTODY RECORD(S) # OR LAB USED: HALL (95) SAMPLE DATE: 01/15/16 SAMPLETIME: 0910 LAB AN SAMPLE DATE: SAMPLETIME: LAB AN SAMPLE DATE: SAMPLETIME: LAB AN SAMPLE DATE: SAMPLETIME: LAB AN	ALYSIS:	5B/8021B/300.0 (CI)	OVM READING (ppm)
SOIL COLOR: DARK YELLOW COHESION (ALL OTHERS): NON COHESIVE SLIGHTLY CONSISTENCY (NON COHESIVE SOILS): LC MOISTURE: DRY SLIGHTLY MOIST MOIST / W SAMPLE TYPE: GRAB (COMPOSITE) # DISCOLORATION/STAINING OBSERVED: YES NO SITE OBSERVATION	COHESIVE / COHESIVE / HIGHLY COHESIVE DENSITY (COHESIVE CLAYS & SILTS) DOSE FIRM DENSE / VERY DENSE HIGH ODOR DETECTED: YES NO EXPLANATION - DESCRIPTION - DESCRIPTION - DESCRIPTION - DENSITY (COHESIVE CLAYS & SILTS) DENSITY (COHESIVE CLAYS & SILTS) DENSITY (COHESIVE CLAYS & SILTS) ANY AREAS DISPLAYING WETNESS: YES NO EXPLANATION - DENSITY (COHESIVE CLAYS & SILTS)	SHTLY PLASTIC / CO S SOFT / FIRM / ANATION -	STIFF / VERY STIFF / HARD	ILY PLASTIC
SOIL IMPACT DIMENSION ESTIMATION: DEPTH TO GROUNDWATER: <50' N		***	TIMATION (Cubic Yards) :	NA
SITE SKETCH	PROD. TANK BGT Located : off on site PLOT PLAN circle: a	attached OVM	CALIB. READ. = NA ppr	RF=0.52 m
	FENCE X X X X PBGTL T.B. ~ 6' B.G.	RI VI P.	EF #: P - 267 ID: VHIXONEVB2 J #: ermit date(s): 06/08 CD Appr. date(s): 11/25	5/15
NOTES: BGT = BELOW-GRADE TANK; E.D. = EXCAVATIO	TO WH.	S.P.D.		N N
	OW-GRADE TANK LOCATION; SPD = SAMPLE POINT DESIGNATION; R.W. = RETAINING WALL; NEWALL; DW-DOUBLE WALL; SB-SINGLE BOTTOM; DB-DOUBLE BOTTOM. ERY DATE: 03/15/2015. ONSITE: 01/15/16	IA-NOT M	Magnetic declination: 10	°E

Analytical Report

Lab Order 1601569

Date Reported: 1/19/2016

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Blagg Engineering

Client Sample ID: 5PC-TB @ 5' (95)

GCU #233E Project:

Collection Date: 1/15/2016 9:10:00 AM

Lab ID: 1601569-001

Matrix: MEOH (SOIL)

Received Date: 1/16/2016 8:00:00 AM

Analyses	Result	RL	Qual	Units	DF	Date Analyzed	Batch
EPA METHOD 300.0: ANIONS						Analyst	SRM
Chloride	ND	30		mg/Kg	20	1/18/2016 11:01:23 AM	23267
EPA METHOD 8015M/D: DIESEL RANG	E ORGANIC	S				Analyst:	KJH
Diesel Range Organics (DRO)	ND	9.7		mg/Kg	1	1/18/2016 10:08:05 AM	23255
Motor Oil Range Organics (MRO)	ND	49		mg/Kg	1	1/18/2016 10:08:05 AM	23255
Surr: DNOP	84.6	70-130		%REC	1	1/18/2016 10:08:05 AM	23255
EPA METHOD 8015D: GASOLINE RAN	GE					Analyst:	NSB
Gasoline Range Organics (GRO)	ND	3.9		mg/Kg	1	1/18/2016 9:43:51 AM	23236
Surr: BFB	0.88	66.2-112		%REC	1	1/18/2016 9:43:51 AM	23236
EPA METHOD 8021B: VOLATILES						Analyst:	NSB
Benzene	ND	0.039		mg/Kg	1	1/18/2016 9:43:51 AM	23236
Toluene	ND	0.039		mg/Kg	1	1/18/2016 9:43:51 AM	23236
Ethylbenzene	ND	0.039		mg/Kg	1	1/18/2016 9:43:51 AM	23236
Xylenes, Total	ND	0.078		mg/Kg	1	1/18/2016 9:43:51 AM	23236
Surr: 4-Bromofluorobenzene	104	80-120		%REC	1	1/18/2016 9:43:51 AM	23236

Refer to the QC Summary report and sample login checklist for flagged QC data and preservation information.

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- Analyte detected in the associated Method Blank
- E Value above quantitation range
- Analyte detected below quantitation limits Page 1 of 5
- Sample pH Not In Range
- RL Reporting Detection Limit

CI	hain-c	of-Cus	tody Record	Turn-Around	Time:	SAME	-			н	AL	L	EN	VI	RC	NI	ME	NT	AL	
lient:	BLAG	G ENGR.	/ BP AMERICA	Standard Project Name	Rush _	DAY				A	N/	AL		S	LA	ВО	RA	ТО		
1ailing A	ddress:	P.O. BO	X 87		GCU # 233	BE		49	01 H				Albud)		
	The second	BLOOM	FIELD, NM 87413	Project #:		Mar La Viel)5-34						410				
hone #:	MET HE	(505) 63	2-1199				4 11					Ar	nalys	s Re	eque	st				
mail or I	Fax#:			Project Mana	ger:		19						13	7			300.1)			
A/QC Pa			Level 4 (Full Validation)		NELSON VE	ELEZ	(8021B)	(kluo si	/ MRO)			(S)	DO. 50	/ 8082 PCB's			water - 30		e	
ccredita	tion:			Sampler:	NELSON VE	THE RESERVE OF THE PARTY OF THE	8	1 (Ga	/ DRO	F	7	OSIA	S.	808			-		dme	_
NELA		□ Other		On Ice:	CONTRACTOR OF THE PROPERTY OF THE PARTY OF T	□ No	1	TP.	101	418	504	827	s d	100		OA)	300.0		te s	or N
EDD (Type)			Sample Temp	erature. + (<u>)</u>	1	BE +	1 (GF	hod	hod	Oor	etal	icid	JA C	j-jc	1 1	ala	posi	S (7
Date	Time	Matrix	Sample Request ID	Container Type and #	Preservative Type	HEAL NO.	BTEX + NAT	BTEX + MTBE + TPH (Gas only)	TPH 8015B (GRO	TPH (Method 418.1)	EDB (Method 504.1)	PAH (8310 or 8270SIMS)	RCRA 8 Metals Anions (F CI NO. NO. PO. SO.)	8081 Pesticides	8260B (VOA)	8270 (Semi-VOA)	Chloride (soll	Grab sample	5 pt. composite sample	r Bu
1/15/16	0910	SOIL	5PC-TB@ ≤ '(95)	4 oz 1	Cool	-001	٧		٧								٧		٧	_
							F													
											-	+	+	+	+			_	-	-
												+		+	-			+		
						line in the second								T						
											-	-	+	+	1					
	no.			8				28			1			+				+	+	
	E01384	0.664		By I mat 4			1													
								17/1												
																1				
ate: 1/15/16	Time:	Relinquishe	le Va	Received by:	i Worls	Date Time	ВІ		REC	FLY To			Court	Eart	nings	on N	IM 97	101		
ate:	Time: 1704	Relinguishe	Wat Walls	Received by:	alle	Date Of Time 110				#:		ergy -267			Payke			ONEVB	2	

Hall Environmental Analysis Laboratory, Inc.

WO#: 1601569

19-Jan-16

Client:

Blagg Engineering

Project:

GCU #233E

Sample ID MB-23267

SampType: mblk

TestCode: EPA Method 300.0: Anions

Client ID:

PBS

Batch ID: 23267

PQL

RunNo: 31522

Prep Date: 1/18/2016

Analysis Date: 1/18/2016

Result

SeqNo: 964790

Units: mg/Kg

HighLimit

%RPD **RPDLimit**

Qual

Analyte Chloride

ND 1.5

Sample ID LCS-23267

SampType: Ics

TestCode: EPA Method 300.0: Anions

Client ID: LCSS

Batch ID: 23267

RunNo: 31522

SeqNo: 964791

Units: mg/Kg

Prep Date: 1/18/2016

Analysis Date: 1/18/2016

SPK value SPK Ref Val %REC

HighLimit

RPDLimit

Qual

Analyte

0

95.4

110

14

15.00

SPK value SPK Ref Val %REC LowLimit

Chloride

1.5

Qualifiers:

D

Value exceeds Maximum Contaminant Level.

Sample Diluted Due to Matrix H Holding times for preparation or analysis exceeded ND Not Detected at the Reporting Limit

R RPD outside accepted recovery limits

% Recovery outside of range due to dilution or matrix

Analyte detected in the associated Method Blank

Value above quantitation range

Reporting Detection Limit

Analyte detected below quantitation limits

Sample pH Not In Range

Page 2 of 5

Hall Environmental Analysis Laboratory, Inc.

WO#: 1601569

19-Jan-16

Client:

Blagg Engineering

Project:

GCU #233E

Sample ID MB-23255 SampType: MBLK Client ID: PBS Batch ID: 23255				TestCode: EPA Method 8015M/D: Diesel Range Organics								
				R	RunNo: 31488							
Prep Date: 1/18/2016	Analysis D	ate: 1/	18/2016	S	SeqNo: 9	63650	Units: mg/K	g/Kg				
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual		
Diesel Range Organics (DRO)	ND	10										
Motor Oil Range Organics (MRO)	ND	50										
Surr: DNOP	8.8		10.00		87.8	70	130					

Sample ID LCS-23255	SampType: LCS			TestCode: EPA Method 8015M/D: Diesel Range Organics							
Client ID: LCSS	Batch ID: 23255			RunNo: 31488							
Prep Date: 1/18/2016	Analysis Date: 1/18/2016		SeqNo: 963694			Units: mg/Kg					
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual	
Diesel Range Organics (DRO)	39	10	50.00	0	79.0	65.8	136				
Surr: DNOP	4.2		5.000		83.1	70	130				

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- B Analyte detected in the associated Method Blank
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH Not In Range
- RL Reporting Detection Limit

Page 3 of 5

Hall Environmental Analysis Laboratory, Inc.

WO#: 1601569

19-Jan-16

Client:

Blagg Engineering

Sample ID MB-23236	SampType: MBLK								
Client ID: PBS	Batch ID: 23236								
Prep Date: 1/15/2016	Analysis Date: 1/18/2016	SegNo: 964172	Units: mg/Kg						
Frep Date. 1/19/2016	Analysis Date. 1/10/2016	Seq140. 304172	Onits. Ing/Kg						
Analyte	Result PQL SPK value	SPK Ref Val %REC LowLimit	HighLimit %RPD	RPDLimit Qual					
Gasoline Range Organics (GRO)	ND 5.0								
Surr: BFB	870 1000	87.0 66.2	112						
Sample ID LCS-23236	SampType: LCS TestCode: EPA Method 8015D: Gasoline Range								
Client ID: LCSS	Batch ID: 23236	RunNo: 31503							
Prep Date: 1/15/2016	Analysis Date: 1/18/2016	SeqNo: 964173	Units: mg/Kg						
Analyte	Result PQL SPK value	SPK Ref Val %REC LowLimit	HighLimit %RPD	RPDLimit Qual					
Gasoline Range Organics (GRO)	26 5.0 25.00	0 103 79.6	122						
Surr: BFB	930 1000	93.1 66.2	112						
Sample ID MB-23235	SampType: MBLK	TestCode: EPA Method	8015D: Gasoline Range	•					
Client ID: PBS	Batch ID: 23235	RunNo: 31513							
Prep Date: 1/15/2016	Analysis Date: 1/18/2016	SegNo: 964347	Units: %REC						
Analyte		SPK Ref Val %REC LowLimit	HighLimit %RPD	RPDLimit Qual					
Surr: BFB	920 1000	92.1 66.2	112						
Sample ID LCS-23235	SampType: LCS	TestCode: EPA Method 8015D: Gasoline Range							
Client ID: LCSS	Batch ID: 23235	RunNo: 31513							
Prep Date: 1/15/2016	Analysis Date: 1/18/2016	SeqNo: 964348	Units: %REC						
Analyte	Result PQL SPK value	SPK Ref Val %REC LowLimit	HighLimit %RPD	RPDLimit Qual					

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- % Recovery outside of range due to dilution or matrix
- Analyte detected in the associated Method Blank
- E Value above quantitation range
- Analyte detected below quantitation limits
- Sample pH Not In Range
- Reporting Detection Limit

Page 4 of 5

Hall Environmental Analysis Laboratory, Inc.

WO#: 1601569

19-Jan-16

Client:

Blagg Engineering

Sample ID MB-23236	SampType: MBLK			TestCode: EPA Method 8021B: Volatiles						
Client ID: PBS	Batch ID: 23236		RunNo: 31503							
Prep Date: 1/15/2016	Analysis Date: 1/18/2016			SeqNo: 964250			Units: mg/Kg			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	ND	0.050			- 54					
Toluene	ND	0.050								
Ethylbenzene	ND	0.050								
(ylenes, Total	ND	0.10								
Surr: 4-Bromofluorobenzene	1.0	4	1.000		102	80	120			
Sample ID LCS-23236	SampType: LCS			Tes	die.					
Client ID: LCSS	Batch ID: 23236			F	RunNo: 3	1503				
Prep Date: 1/15/2016	Analysis Date: 1/18/2016			SeqNo: 964254			Units: mg/Kg			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	0.94	0.050	1.000	0	94.3	80	120		No.	
Coluene	0.99	0.050	1.000	0	99.0	80	120			
Ethylbenzene	1.1	0.050	1.000	0	106	80	120			
(ylenes, Total	3.2	0.10	3.000	0	107	80	120			
Surr: 4-Bromofluorobenzene	1.1		1.000	10 10 15	114	80	120	200	Jeen	
Sample ID MB-23235	SampType: MBLK		TestCode: EPA Method 8021B: Volatiles							
Client ID: PBS	Batch ID: 23235			RunNo: 31513						
Prep Date: 1/15/2016	Analysis Date: 1/18/2016			SeqNo: 964430			Units: %RE	С		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Surr: 4-Bromofluorobenzene	1.1		1.000		113	80	120			
Sample ID LCS-23235	SampType: LCS			TestCode: EPA Method 8021B: Volatiles						
Client ID: LCSS	Batch ID: 23235			RunNo: 31513						
Prep Date: 1/15/2016	Analysis Date: 1/18/2016			SeqNo: 964431 Units: %REC						
Analyte	Result	PQL	CDV value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- Not Detected at the Reporting Limit ND
- R RPD outside accepted recovery limits
- % Recovery outside of range due to dilution or matrix
- Analyte detected in the associated Method Blank
- E Value above quantitation range
- Analyte detected below quantitation limits
- Sample pH Not In Range
- Reporting Detection Limit

Page 5 of 5





Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87109 TEL: 505-345-3975 FAX: 505-345-4107

Website: www.hallenvironmental.com

Sample Log-In Check List

BLAGG Work Order Number: 1601569 RcptNo: 1 Client Name: Received by/date: Logged By: Ashley G 1/16/2016 8:00:00 AM Ashley Gallegos Completed By: 1/16/2016 8:36:12 AM Reviewed By: Chain of Custody Not Present No 🗌 Yes __ 1. Custody seals intact on sample bottles? No 🗌 Not Present Yes 2. Is Chain of Custody complete? 3. How was the sample delivered? Courier Log In No 🗌 NA [4. Was an attempt made to cool the samples? NA 🗌 No 🗌 5. Were all samples received at a temperature of >0° C to 6.0°C Yes No 🗌 6. Sample(s) in proper container(s)? No 🗌 7. Sufficient sample volume for indicated test(s)? Yes No 🗌 8. Are samples (except VOA and ONG) properly preserved? Yes No M NA 🗌 9. Was preservative added to bottles? No VOA Vials Yes [No 🗌 10.VOA vials have zero headspace? No 🖈 Yes 11. Were any sample containers received broken? # of preserved bottles checked No 🗌 for pH: 12. Does paperwork match bottle labels? Yes (<2 or >12 unless noted) (Note discrepancies on chain of custody) Adjusted? No 🗌 13. Are matrices correctly identified on Chain of Custody? No 🗌 14. Is it clear what analyses were requested? Yes Checked by No 🗌 15. Were all holding times able to be met? Yes 🖈 (If no, notify customer for authorization.) Special Handling (if applicable) NA Yes No 🗌 16. Was client notified of all discrepancies with this order? Person Notified: Date | By Whom: eMail Phone Fax In Person Via: Regarding: Client Instructions: 17. Additional remarks: 18. Cooler Information Cooler No Temp °C Condition | Seal Intact | Seal No Signed By 1.0 Good Yes

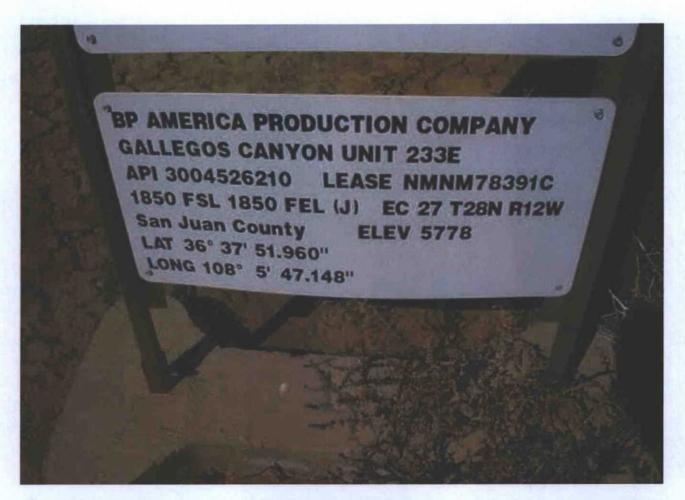

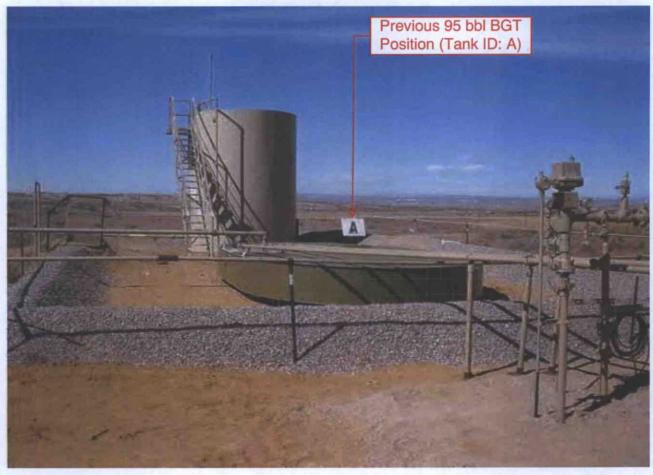

Moskal, Steven

From:

Railsback, Farrah (CH2M HILL)

Sent:

Wednesday, December 30, 2015 2:00 PM

To:

Smith, Cory, EMNRD (Cory.Smith@state.nm.us)

Cc:

Moskal, Steven; 'blagg_njv@yahoo.com'; jeffcblagg@aol.com

Subject:

BP Pit Close Notification - GALLEGOS CANYON UNIT 233E

BP America Production Company

200 Energy Court Farmington, NM 87401

Phone: (505) 326-9200

SENT VIA E-MAIL TO: CORY.SMITH@STATE.NM.US

December 30, 2015

New Mexico Oil Conservation Division 1000 Rio Brazos Road Aztec, New Mexico 87410

The second secon

GALLEGOS CANYON UNIT 233E API 30-045-26210 (J) Section 27 – T28N – R12W San Juan County, New Mexico

Notice of Proposed Below-Grade Tank (BGT) Closure

Dear Mr. Cory Smith:

In regards to the captioned subject and requirements of the NMOCD pit rule, this letter is notification that BP is planning to close a 95 bbl BGT that will no longer be operational at this well site. We anticipate this work to start on or around January 6, 2016.

Should you have any questions, please feel free to contact BP at our Farmington office.

Sincerely,

RE:

Steven Moskal BP Field Environmental Coordinator

(505) 326-9497

bp



BP America Production Company 200 Energy Court Farmington, NM 87401 Phone: (505) 326-9200

December 29, 2015

Bureau of Land Management Acting Supervisor of Environmental Protection 6251 College Suite A Farmington, NM 87402

VIA CERTIFIED MAIL - RETURN RECEIPT REQUESTED

Re: Notification of plans to close/remove a below grade tank

Well Name: GALLEGOS CANYON UNIT 233E

API#: 3004526210

To Whom It May Concern,

As part of the NM "Pit Rule": 19.15.17.13 Closure Requirements, Paragraph J. BP America Production Company (BP) is required to notify the surface owner of BP's plans to close/remove a below grade tank. BP wishes to inform you of our plans to close/remove the below grade tank on its well pad located on your surface. BP plans to commence this work on or about January 4, 2016. If there aren't any unforeseen problems, the work should be completed within 10 working days.

As a point of clarification, BP will be closing the below grade tank and either operating without one or replacing it with an above ground tank, the well site will continue to operate.

Unless you have questions about this notice, there is no need to respond to this letter. If you do have any questions or concerns, please contact me at (505)-326-9214.

Sincerely,

Charlie Davis

BP America Production Company