

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-045-29226
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Burnham Gas Com A
8. Well Number 1
9. OGRID Number 000778
10. Pool name or Wildcat West Kutz Pictured Cliffs

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other

2. Name of Operator
BP America Production Company

3. Address of Operator
**737 North Eldridge Pkwy, 12.181A
Houston, TX 77079**

4. Well Location
 Unit Letter **F**: **1450** feet from the **North** line and **1520** feet from the **West** line
 Section **12** Township **29N** Range **13W** NMPM County **San Juan**

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
5355'

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input checked="" type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>			
CLOSED-LOOP SYSTEM <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Please see the attached P&A operations performed on the subject well March 2017.

OIL CONS. DIV DIST

APR 17 2017

Spud Date: Rig Release Date:

Approved for plugging of wellbore only.
 Liability under bond is retained pending
 Receipt of C-103 (Subsequent Report of Well
 Plugging) which may be found @ OCD web
 page under forms
www.emnrd.state.us/ocd

I hereby certify that the information above is true and complete to the best of my knowledge.

SIGNATURE *Toya Colvin* TITLE Regulatory Analyst DATE 4/12/2017

Type or print name Toya Colvin E-mail address: Toya.Colvin@bp.com PHONE: 281-892-5369

For State Use Only

Deputy Oil & Gas Inspector,
 District #3

APPROVED BY: *Bob Rell* TITLE AV DATE 4/21/17

Conditions of Approval (if any):

4

Burnham Gas Com A #1

Final P&A

West Kutz Pictured Cliffs Ext.
 1450' FNL, 1520' FWL, Section 12, T-29-N, R-13-W
 San Juan County, NM, API #30-045-29226

Spud: 12/9/95
 Completed: 1/17/96
 Elevation: 5355' GI

8.75" hole

Kirtland @ 452'

Fruitland @ 1012'

Pictured Cliffs @ 1288'

6.25" hole



TD 1581'
 PBSD 1446'

Plug #3: 93' - 0'
 Class B cement, 16 sxs, 18.8 cf, 15.6 ppg
 Tag TOC in annulus at 35'.
 Top off annulus and casing with 10 sxs, 11.8 cf, Class B, 15.6 ppg. WOC. Tagged annulus at 10'. Top off again with 1 sack, 1.18 cf Class B.

7" , 23# Casing set @ 258'
 Cement with 60 sxs, circulated

Perforate @ 80' - 3 holes
 Unable to inject at 800 psi

TOC 80' (CBL 2017)

Plug #2: 508' - 100'
 Class B cement, 32 sxs, 37.76 cf, 15.6 ppg
 Calculated TOC: 100'

Plug #1: 1234' - 905'
 Class B cement, 25 sxs, 29.5 cf, 15.6 ppg
 Calculated TOC: 905'

Set CR @ 1234'

Pictured Cliffs Perforations:
 1284' - 1308'

CIBP @ 1446' (1996)

4.5", 10.5# Casing set @ 1578'
 Cement with 150 sxs

squeeze holes. Attempt to PT BH. Pump ½ bbl and pressured up to 400 PSI; no bleed off. NMOCD approved inside plug.

Wash up equipment. ND BOP. Dig out WH and RD rig. Held JSEA. Cut off WH with air saw and tag TOC in 4.5 casing 8' and found annulus down 35'. Attempt to RIH with 1" poly pipe; pipe bending. Top off casings with 10 sxs (11.8 cf) 15-6 PPG Class B cement. NMOCD required WOC and tag TOC in annulus. WOC overnight and tag in AM. Set P&A marker in morning if tag approved by NMOCD. Rode rig and equipment to Burnham Gas Com B 1. Travel back to yard.

03/28/2017

Traveled to Burnham Gas Com A1. Tagged top of cement in annulus at 10 feet. Top off casing with 1 sx Class B cement (1.18 cf). MOL.
Keeper

03/30/2017

Drive to location. JSEA. Check TOC. Found cement at surface in casing and annulus. John Durham, NMOCD, was on location and approved to set P&A marker. Monitor well. Write Hot Work Permit and weld on P&A marker. Drive back to yard.


Burnham Gas Com A #1

Final P&A

West Kutz Pictured Cliffs Ext.
 1450' FNL, 1520' FWL, Section 12, T-29-N, R-13-W
 San Juan County, NM, API #30-045-29226

Spud: 12/9/95
 Completed: 1/17/96
 Elevation: 5355' GI

8.75" hole

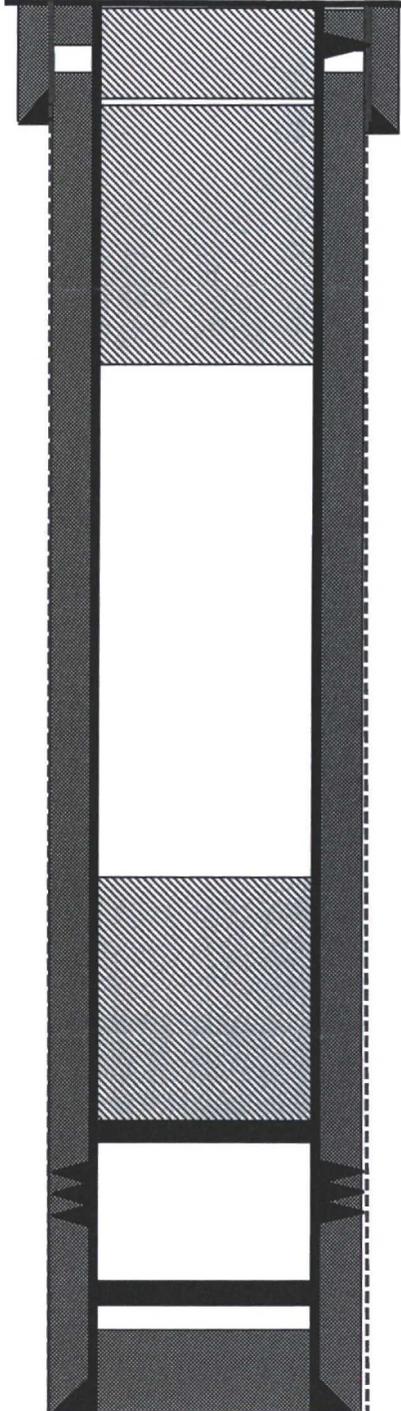

7" , 23# Casing set @ 258'
 Cement with 60 sxs, circulated

Perforate @ 80'- 3 holes
 Unable to inject at 800 psi

TOC 80' (CBL 2017)

Plug #3: 93' - 0'
 Class B cement, 16 sxs, 18.8 cf, 15.6 ppg
 Tag TOC in annulus at 35'.
 Top off annulus and casing with 10 sxs, 11.8 cf, Class B, 15.6 ppg. WOC. Tagged annulus at 10'. Top off again with 1 sack, 1.18 cf Class B.

Plug #2: 508' - 100'
 Class B cement, 32 sxs, 37.76 cf, 15.6 ppg
 Calculated TOC: 100'

Plug #1: 1234' - 905'
 Class B cement, 25 sxs, 29.5 cf, 15.6 ppg
 Calculated TOC: 905'

Set CR @ 1234'

Pictured Cliffs Perforations:
 1284' - 1308'

CIBP @ 1446' (1996)

4.5", 10.5# Casing set @ 1578'
 Cement with 150 sxs

Kirtland @ 452'

Fruitland @ 1012'

Pictured Cliffs @ 1288'

6.25" hole

TD 1581'
 PBTB 1446'