

API 30-045-23045

SMYERS COM LS 001A-MV

Current Wellbore



COMMENTS

EQUIPMENT DESCRIPTION

FIELD	Farmington		
WELL	SMYERS COM LS 001A-MV		
COUNTY			
API No.	300452304500		
RKB ELEVATION		SEC:	2
GL ELEVATION	5,997	TOWN:	32N
RKB-GL		RANGE:	11W
Lat: 36.92931		Long: -107.96369	

DIRECTIONAL DATA

MAX ANGLE		THRU	
KOP		TYPE	

PRODUCTION DETAIL

	Tubing	CASING
SIZE	2 3/8	
WEIGHT		
GRADE		
DEPTH	5,358	
THREAD		
I.D.		
DRIFT		
BURST		
COLLAPSE		
CAPACITY		
# JOINTS		

PRODUCTION ASSEMBLY DETAIL

#	O. D.	I. D.	LENGTH	Description
	IN	IN	FT	
1				
2				
3				
4				
5				
6				

CASING DETAIL

#	SIZE	WGHT	GRADE	THREAD	DEPTH
A	9 5/8	36			222
B	7	20			3,100
C	4 1/2				5,415
D					

PRESSURE DATA

BOTTOM HOLE PRESSURE	
Calculated using HASP + (0.1 * Top Perf)	
HIGHEST ANTICIPATED PRESSURE	
SITP from offset MC 5-90 + 500 psi Safety Factor	
MAXIMUM ALLOWABLE SURFACE PRESS	
Rating of valves	
BOTTOM HOLE TEMPERATURE	
From PLT	

Prepared by: Michael Morgan

Date: 8-Aug-2017

PBTD:	5,398	MD	TVD
TD	5,415	MD	TVD


Spud: 10/3/1978 Frac: 11/27/1978 Tbg: Workovers:

Formation	Top
Cliff House	4230
Point Lookout	4956

OIL CONS. DIV DIST. 3
AUG 09 2017

PERFORATIONS:

MesaVerde
4237' - 5364'

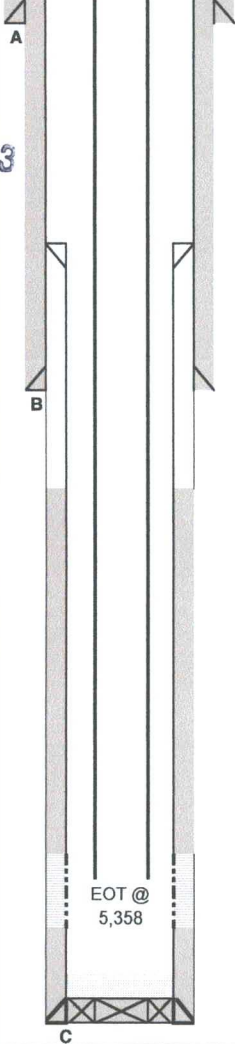

TOL: 2922'

133000# 20/40 snd