

District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Avenue, Artesia, NM 88210  
District III  
1000 Rio Brazos Road, Aztec, NM 87410

State of New Mexico  
Energy Minerals and Natural Resources

Form C-144  
June 1, 2004

Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

For drilling and production facilities, submit to appropriate NMOCD District Office.  
For downstream facilities, submit to Santa Fe office

District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

**Pit or Below-Grade Tank Registration or Closure**

Is pit or below-grade tank covered by a "general plan"? Yes  No

Type of action: Registration of a pit or below-grade tank  Closure of a pit or below-grade tank


Operator: BP AMERICA PROD. CO. Telephone: (505)-326-9200 e-mail address: \_\_\_\_\_  
 Address: 200 ENERGY COURT, FARMINGTON, NM 87410  
 Facility or well name: McCULLEY LS #5M API #: 30-045- 26544 U/L or Qtr/Qtr D Sec 24 T 28N R 9W  
 County: SAN JUAN Latitude 36.65130 Longitude 107.74466 NAD: 1927  1983  Surface Owner Federal  State  Private  Indian

Pit	Below-grade tank	
Type: Drilling <input type="checkbox"/> Production <input type="checkbox"/> Disposal <input checked="" type="checkbox"/> <u>ABANDON</u> Workover <input type="checkbox"/> Emergency <input type="checkbox"/> Lined <input type="checkbox"/> Unlined <input checked="" type="checkbox"/> Liner type: Synthetic <input type="checkbox"/> Thickness _____ mil Clay <input type="checkbox"/> Pit Volume _____ bbl	Volume: _____ bbl Type of fluid: _____ Construction material: <u>N/A</u> Double-walled, with leak detection? Yes <input type="checkbox"/> If not, explain why not.	
Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)	Less than 50 feet 50 feet or more, but less than 100 feet 100 feet or more	(20 points) (10 points) <u>0</u> ( 0 points)
Wellhead protection area: (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)	Yes No	(20 points) ( 0 points) <u>0</u>
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)	Less than 200 feet 200 feet or more, but less than 1000 feet 1000 feet or more	(20 points) (10 points) <u>0</u> ( 0 points)
<b>Ranking Score (Total Points)</b>		<u>0</u>

If this is a pit closure: (1) attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location: (check the onsite box if you are burying in place) onsite  offsite  If offsite, name of facility \_\_\_\_\_. (3) Attach a general description of remedial action taken including remediation start date and end date. (4) Groundwater encountered: No  Yes  If yes, show depth below ground surface \_\_\_\_\_ ft. and attach sample results. (5)

Attach soil sample results and a diagram of sample locations and excavations.

Additional Comments: PIT LOCATED APPROXIMATELY 51 FT. N45E FROM WELL HEAD  
PIT EXCAVATION: WIDTH N/A ft., LENGTH N/A ft., DEPTH N/A ft.  
 PIT REMEDIATION: CLOSE AS IS: , LANDFARM: , COMPOST: , STOCKPILE: , OTHER  (explain)  
 Cubic yards: N/A  
**BEDROCK BOTTOM**



I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines , a general permit , or an alternative OCD-approved plan .

Date: 11/30/05

Printed Name/Title Jeff Blagg - P.E. # 11607 Signature [Signature]

Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.

Approval: DEPUTY OIL & GAS INSPECTOR, DIST. 3  
 Printed Name/Title \_\_\_\_\_ Signature [Signature] Date: FEB 28 2006

CLIENT: <u>BP</u>	<b>BLAGG ENGINEERING, INC.</b> P.O. BOX 87, BLOOMFIELD, NM 87413 (505) 632-1199	LOCATION NO: <u>B711</u>
		COCR NO: <u>14597</u>

**FIELD REPORT: PIT CLOSURE VERIFICATION**

PAGE No: 1 of 1

LOCATION: NAME: McCULLER LS WELL#: SM TYPE: ABANDON  
 QUAD/UNIT: D SEC: 24 TWP: 28N RNG: 9W PM: NM CNTY: SJ ST: NM  
 QTR/FOOTAGE: 1285 FNL x 1260 FWL <sup>NW/NE</sup> CONTRACTOR: PXS (POLLANDER)

DATE STARTED: 11-29-05  
 DATE FINISHED: 11-29-05  
 ENVIRONMENTAL SPECIALIST: JCB

EXCAVATION APPROX. NA FT. x NA FT. x NA FT. DEEP. CUBIC YARDAGE: 0

DISPOSAL FACILITY: NA REMEDIATION METHOD: CLOSE AS IS

LAND USE: RANGE - BLM LEASE: NM 004208 FORMATION: MV

FIELD NOTES & REMARKS: PIT LOCATED APPROXIMATELY 51 FT. N45E FROM WELLHEAD.

DEPTH TO GROUNDWATER: >100 NEAREST WATER SOURCE: >1000 NEAREST SURFACE WATER: >1000  
 NMOCD RANKING SCORE: 0 NMOCD TPH CLOSURE STD: 5000 PPM

SOIL AND EXCAVATION DESCRIPTION:

OVM CALIB. READ. = 52.0 ppm  
 OVM CALIB. GAS = 100 ppm RF = 0.52  
 TIME: 0930 am/pm DATE: 11/29

SOIL TYPE: SAND / SILTY SAND / SILT / SILTY CLAY / CLAY / GRAVEL / OTHER BEDROCK @ G.L.

SOIL COLOR: \_\_\_\_\_

COHESION (ALL OTHERS): NON COHESIVE / SLIGHTLY COHESIVE / COHESIVE / HIGHLY COHESIVE

CONSISTENCY (NON COHESIVE SOILS): LOOSE / FIRM / DENSE / VERY DENSE

PLASTICITY (CLAYS): NON PLASTIC / SLIGHTLY PLASTIC / COHESIVE / MEDIUM PLASTIC / HIGHLY PLASTIC

DENSITY (COHESIVE CLAYS & SILTS): SOFT / FIRM / STIFF / VERY STIFF / HARD

MOISTURE DRY / SLIGHTLY MOIST / MOIST / WET / SATURATED / SUPER SATURATED

DISCOLORATION/STAINING OBSERVED: YES NO EXPLANATION - \_\_\_\_\_

HC ODOR DETECTED: YES NO EXPLANATION - \_\_\_\_\_

SAMPLE TYPE: GRAB / COMPOSITE # OF PTS. 5

ADDITIONAL COMMENTS: BEDROCK BOTTOM 6x6x1 Eastern A excavated into Bedrock Sandstone, use Backhoe to Dig into Pit x Sample.

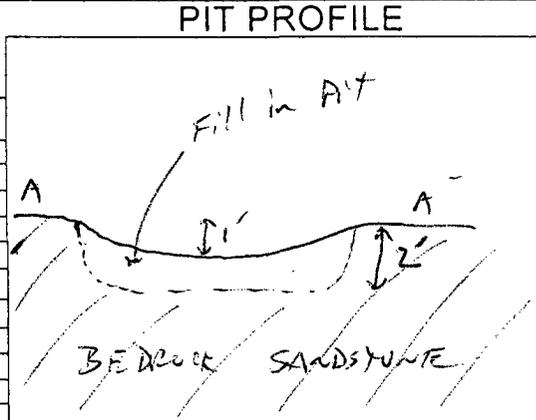
FIELD 418.1 CALCULATIONS

SAMP. TIME	SAMP. ID	LAB NO.	WEIGHT (g)	mL FREON	DILUTION	READING	CALC. (ppm)



**OVM READING**

SAMPLE ID	FIELD HEADSPACE (ppm)
1 @	
2 @	
3 @	
4 @	
5 @	
5-point composite @ 2'	3.2



**LAB SAMPLES**

SAMPLE ID	ANALYSIS	TIME
5-point	TPH	0750
	BTEX	1050
	CL-	
	<u>PASSED</u>	

P.D. = PIT DEPRESSION; B.G. = BELOW GRADE; B = BELOW T.H. = TEST HOLE; - = APPROX.; T.B. = TANK BOTTOM

TRAVEL NOTES: CALLOUT: \_\_\_\_\_ ONSITE: 11/29/05

# ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

## EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons


Client:	Blagg / BP	Project #:	94034-010
Sample ID:	5-Point Composite @ 2'	Date Reported:	11-30-05
Laboratory Number:	35285	Date Sampled:	11-29-05
Chain of Custody No:	14597	Date Received:	11-29-05
Sample Matrix:	Soil	Date Extracted:	11-30-05
Preservative:	Cool	Date Analyzed:	11-30-05
Condition:	Cool and Intact	Analysis Requested:	8015 TPH


Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	97.6	0.2
Diesel Range (C10 - C28)	462	0.1
Total Petroleum Hydrocarbons	560	0.2

ND - Parameter not detected at the stated detection limit.

References: Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: **McCulley LS 5M Abandon Pit.**

  
Analyst

  
Review

# ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

## EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	Blagg / BP	Project #:	94034-010
Sample ID:	5-Point Composite @ 2'	Date Reported:	11-30-05
Laboratory Number:	35285	Date Sampled:	11-29-05
Chain of Custody:	14597	Date Received:	11-29-05
Sample Matrix:	Soil	Date Analyzed:	11-30-05
Preservative:	Cool	Date Extracted:	11-30-05
Condition:	Cool & Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)
Benzene	40.4	1.8
Toluene	324	1.7
Ethylbenzene	155	1.5
p,m-Xylene	1,470	2.2
o-Xylene	468	1.0
<b>Total BTEX</b>	<b>2,460</b>	

ND - Parameter not detected at the stated detection limit.


Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	97.0 %
	1,4-difluorobenzene	97.0 %
	Bromochlorobenzene	97.0 %

References: Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: McCulley LS 5M Abandon Pit.

  
Analyst

  
Review

# ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

Chloride

Client:	Blagg / BP	Project #:	94034-010
Sample ID:	5-Point Composite @ 2'	Date Reported:	11-30-05
Lab ID#:	35285	Date Sampled:	11-29-05
Sample Matrix:	Soil	Date Received:	11-29-05
Preservative:	Cool	Date Analyzed:	11-30-05
Condition:	Cool and Intact	Chain of Custody:	14597

Parameter


Concentration (mg/Kg)


Total Chloride

28.9

Reference: Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: McCulley LS 5M Abandon Pit.

  
Analyst

  
Review

District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Avenue, Artesia, NM 88210  
District III  
1000 Rio Brazos Road, Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy Minerals and Natural Resources

Form C-144  
June 1, 2004

Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

For drilling and production facilities, submit to appropriate NMOCD District Office.  
For downstream facilities, submit to Santa Fe office

**Pit or Below-Grade Tank Registration or Closure**

Is pit or below-grade tank covered by a "general plan"? Yes  No


Type of action: Registration of a pit or below-grade tank  Closure of a pit or below-grade tank

Operator: BP AMERICA PROD. CO. Telephone: (505)-326-9200 e-mail address: \_\_\_\_\_  
Address: 200 ENERGY COURT, FARMINGTON, NM 87410  
Facility or well name: McCULLEY LS #5M API #: 30-045-26544 U/L or Qtr/Qtr D Sec 24 T 28N R 9W  
County: SAN JUAN Latitude 36.65130 Longitude 107.74466 NAD: 1927  1983  Surface Owner Federal  State  Private  Indian

Pit	Below-grade tank	
Type: Drilling <input type="checkbox"/> Production <input type="checkbox"/> Disposal <input checked="" type="checkbox"/> <u>BLOW</u> Workover <input type="checkbox"/> Emergency <input type="checkbox"/> Lined <input type="checkbox"/> Unlined <input checked="" type="checkbox"/> Liner type: Synthetic <input type="checkbox"/> Thickness _____ mil Clay <input type="checkbox"/> Pit Volume _____ bbl	Volume: _____ bbl Type of fluid: _____ Construction material: <u>MA</u> Double-walled, with leak detection? Yes <input type="checkbox"/> If not, explain why not.	
Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)	Less than 50 feet	(20 points)
	50 feet or more, but less than 100 feet	(10 points) <b>0</b>
	100 feet or more	( 0 points)
Wellhead protection area: (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)	Yes	(20 points)
	No	( 0 points) <b>0</b>
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)	Less than 200 feet	(20 points)
	200 feet or more, but less than 1000 feet	(10 points) <b>0</b>
	1000 feet or more	( 0 points)
<b>Ranking Score (Total Points)</b>		<b>0</b>

If this is a pit closure: (1) attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location: (check the onsite box if you are burying in place) onsite  offsite  If offsite, name of facility BP CROUCH MESA LF. (3) Attach a general description of remedial action taken including remediation start date and end date. (4) Groundwater encountered: No  Yes  If yes, show depth below ground surface \_\_\_\_\_ ft. and attach sample results. (5) Attach soil sample results and a diagram of sample locations and excavations.

Additional Comments: PIT LOCATED APPROXIMATELY 129 FT. S81E FROM WELL HEAD.  
PIT EXCAVATION: WIDTH 10 ft., LENGTH 10 ft., DEPTH 7 ft.  
PIT REMEDIATION: CLOSE AS IS: , LANDFARM: , COMPOST: , STOCKPILE: , OTHER  EXCAVATE  
Cubic yards: 20  
**BEDROCK BOTTOM**



I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines , a general permit , or an alternative OCD-approved plan .

Date: 11/30/05

Printed Name/Title Jeff Blagg - P.E. # 11607 Signature [Signature]

Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.

Approval: DEPUTY OIL & GAS INSPECTOR, DIST. 8 Signature [Signature] Date: FEB 28 2006

CLIENT: <u>BP</u>	<b>BLAGG ENGINEERING, INC.</b> P.O. BOX 87, BLOOMFIELD, NM 87413 (505) 632-1199	LOCATION NO: <u>81711</u>
		COCR NO: <u>14597</u>

### FIELD REPORT: PIT CLOSURE VERIFICATION

PAGE No: 1 of 1

LOCATION: NAME: <u>McCULLY LS</u> WELL#: <u>SM</u> TYPE: <u>BLOW</u>	DATE STARTED: <u>11-29-05</u>
QUAD/UNIT: <u>D SEC: 24 TWP: 28N RNG: 9W PM: NM CNTY: SJ ST: NM</u>	DATE FINISHED: <u>11-29-05</u>
QTR/FOOTAGE: <u>1285 FNL x 1260 FWL NW/NE</u> CONTRACTOR: <u>PXS (PUNANDER)</u>	ENVIRONMENTAL SPECIALIST: <u>JCB</u>

EXCAVATION APPROX. 10 FT. x 10 FT. x 7 FT. DEEP. CUBIC YARDAGE: 20 ±

DISPOSAL FACILITY: BP CROCKER MESA L.F. REMEDIATION METHOD: EXCAVATE

LAND USE: RANGE - BLM LEASE: NM 004208 FORMATION: MV

FIELD NOTES & REMARKS: PIT LOCATED APPROXIMATELY 129 FT. S 81 E FROM WELLHEAD.

DEPTH TO GROUNDWATER: >100 NEAREST WATER SOURCE: >1000 NEAREST SURFACE WATER: >1000

NMOC D RANKING SCORE: 0 NMOC D TPH CLOSURE STD: 5000 PPM

#### SOIL AND EXCAVATION DESCRIPTION:

OVM CALIB. READ. = 52.0 ppm  
 OVM CALIB. GAS = 100 ppm RF = 0.52  
 TIME: 0930 am/pm DATE: 11/29

SOIL TYPE: SAND / SILTY SAND / SILT / SILTY CLAY / CLAY / GRAVEL / OTHER Bedrock sandstone @ 7'

SOIL COLOR: \_\_\_\_\_

COHESION (ALL OTHERS): NON COHESIVE / SLIGHTLY COHESIVE / COHESIVE / HIGHLY COHESIVE

CONSISTENCY (NON COHESIVE SOILS): LOOSE / FIRM / DENSE / VERY DENSE

PLASTICITY (CLAYS): NON PLASTIC / SLIGHTLY PLASTIC / COHESIVE / MEDIUM PLASTIC / HIGHLY PLASTIC

DENSITY (COHESIVE CLAYS & SILTS): SOFT / FIRM / STIFF / VERY STIFF / HARD

MOISTURE: DRY / SLIGHTLY MOIST / MOIST / WET / SATURATED / SUPER SATURATED

DISCOLORATION/STAINING OBSERVED: YES / NO EXPLANATION - GRAY/BLACK TO SANDSTONE @ 7'

HC ODOR DETECTED: YES / NO EXPLANATION - Strong

SAMPLE TYPE: GRAB / COMPOSITE # OF PTS. 5

ADDITIONAL COMMENTS: 9' x 9' x 2' EARTHEN PIT EXCAVATED DOWN TO BEDROCK SANDSTONE, USE BACKHOE. (Bedrock @ 7')

BEDROCK BOTTOM

**CLOSED**

#### FIELD 418.1 CALCULATIONS

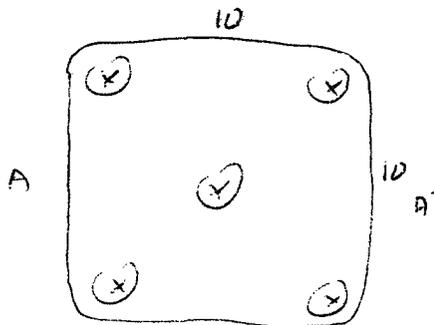
SAMP. TIME	SAMP. ID	LAB NO.	WEIGHT (g)	mL FREON	DILUTION	READING	CALC. (ppm)

#### SCALE

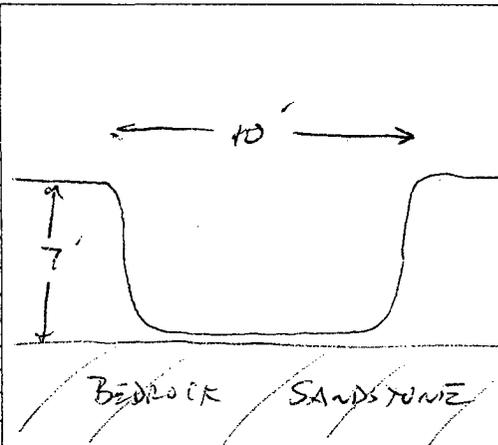


0 FT  
N

#### PIT PERIMETER



#### PIT PROFILE



#### OVM READING

SAMPLE ID	FIELD HEADSPACE (ppm)
1 @	
2 @	
3 @	
4 @	
5 @	
5-Point Composite @ 7'	161

#### LAB SAMPLES

SAMPLE ID	ANALYSIS	TIME
5-Point	TPH	1135
	BTEX	
	CL-	
	<u>PASSED</u>	

P.D. = PIT DEPRESSION; B.G. = BELOW GRADE; B = BELOW T.H. = TEST HOLE; ~ = APPROX.; T.B. = TANK BOTTOM

TRAVEL NOTES: CALLOUT: \_\_\_\_\_ ONSITE: 11/29/05

# ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

## EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client:	Blagg / BP	Project #:	94034-010
Sample ID:	5-Point Composite @ 7'	Date Reported:	11-30-05
Laboratory Number:	35287	Date Sampled:	11-29-05
Chain of Custody No:	14597	Date Received:	11-29-05
Sample Matrix:	Soil	Date Extracted:	11-30-05
Preservative:	Cool	Date Analyzed:	11-30-05
Condition:	Cool and Intact	Analysis Requested:	8015 TPH


Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	1,440	0.2
Diesel Range (C10 - C28)	1,250	0.1
Total Petroleum Hydrocarbons	2,690	0.2

ND - Parameter not detected at the stated detection limit.

References: Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: **McCulley LS 5M Blow Pit.**

  
Analyst

  
Review

# ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

## EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	Blagg / BP	Project #:	94034-010
Sample ID:	5-Point Composite @ 7'	Date Reported:	11-30-05
Laboratory Number:	35287	Date Sampled:	11-29-05
Chain of Custody:	14597	Date Received:	11-29-05
Sample Matrix:	Soil	Date Analyzed:	11-30-05
Preservative:	Cool	Date Extracted:	11-30-05
Condition:	Cool & Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)
Benzene	342	1.8
Toluene	2,990	1.7
Ethylbenzene	1,440	1.5
p,m-Xylene	9,080	2.2
o-Xylene	2,770	1.0
<b>Total BTEX</b>	<b>16,620</b>	

ND - Parameter not detected at the stated detection limit.


Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	98.0 %
	1,4-difluorobenzene	98.0 %
	Bromochlorobenzene	98.0 %

References: Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: McCulley LS 5M Blow Pit.

  
Analyst

  
Review

# ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW


Chloride


Client:	Blagg / BP	Project #:	94034-010
Sample ID:	5-Point Composite @ 7'	Date Reported:	11-30-05
Lab ID#:	35287	Date Sampled:	11-29-05
Sample Matrix:	Soil	Date Received:	11-29-05
Preservative:	Cool	Date Analyzed:	11-30-05
Condition:	Cool and Intact	Chain of Custody:	14597

Parameter	Concentration (mg/Kg)
Total Chloride	67.4

Reference: Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: McCulley LS 5M Blow Pit.

  
Analyst

  
Review

District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Avenue, Artesia, NM 88210  
District III  
1000 Rio Brazos Road, Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy Minerals and Natural Resources

Form C-144  
June 1, 2004

Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

For drilling and production facilities, submit to appropriate NMOCD District Office.  
For downstream facilities, submit to Santa Fe office

**Pit or Below-Grade Tank Registration or Closure**

Is pit or below-grade tank covered by a "general plan"? Yes  No


Type of action: Registration of a pit or below-grade tank  Closure of a pit or below-grade tank

Operator: BP AMERICA PROD. CO. Telephone: (505)-326-9200 e-mail address: \_\_\_\_\_  
Address: 200 ENERGY COURT. FARMINGTON. NM 87410  
Facility or well name: McCULLEY LS #5M API #: 30-045- 26544 U/L or Qtr/Qtr D Sec 24 T 28N R 9W  
County: SAN JUAN Latitude 36.65130 Longitude 107.74466 NAD: 1927  1983  Surface Owner Federal  State  Private  Indian

<b>Pit</b> Type: Drilling <input type="checkbox"/> Production <input type="checkbox"/> Disposal <input checked="" type="checkbox"/> <u>DEHYDRATOR</u> Workover <input type="checkbox"/> Emergency <input type="checkbox"/> Lined <input type="checkbox"/> Unlined <input checked="" type="checkbox"/> Liner type: Synthetic <input type="checkbox"/> Thickness _____ mil Clay <input type="checkbox"/> Pit Volume _____ bbl	<b>Below-grade tank</b> Volume: _____ bbl Type of fluid: _____ Construction material: <u>N/A</u> Double-walled, with leak detection? Yes <input type="checkbox"/> If not, explain why not. _____	
	Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)	Less than 50 feet (20 points) 50 feet or more, but less than 100 feet (10 points) 100 feet or more ( 0 points)
Wellhead protection area: (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)	Yes (20 points) No ( 0 points)	<b>0</b>
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)	Less than 200 feet (20 points) 200 feet or more, but less than 1000 feet (10 points) 1000 feet or more ( 0 points)	<b>0</b>
<b>Ranking Score (Total Points)</b>		<b>0</b>

If this is a pit closure: (1) attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location: (check the onsite box if you are burying in place) onsite  offsite  If offsite, name of facility \_\_\_\_\_. (3) Attach a general description of remedial action taken including remediation start date and end date. (4) Groundwater encountered: No  Yes  If yes, show depth below ground surface \_\_\_\_\_ ft. and attach sample results. (5) Attach soil sample results and a diagram of sample locations and excavations.

Additional Comments: PIT LOCATED APPROXIMATELY 93 FT. N41W FROM WELL HEAD.  
PIT EXCAVATION: WIDTH N/A ft., LENGTH N/A ft., DEPTH N/A ft.  
 PIT REMEDIATION: CLOSE AS IS: , LANDFARM: , COMPOST: , STOCKPILE: , OTHER  (explain)  
 Cubic yards: N/A  
**BEDROCK BOTTOM**



I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines , a general permit , or an alternative OCD-approved plan .

Date: 11/30/05

Printed Name/Title Jeff Blagg - P.E. # 11607 Signature \_\_\_\_\_

Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.

Approval: \_\_\_\_\_  
 Printed Name/Title DEPUTY OIL & GAS INSPECTOR, DIST. 03 Signature \_\_\_\_\_ Date: FEB 28 2006

CLIENT: <u>BP</u>	<b>BLAGG ENGINEERING, INC.</b> P.O. BOX 87, BLOOMFIELD, NM 87413 (505) 632-1199	LOCATION NO: <u>B1711</u>
		COCR NO: <u>14597</u>

### FIELD REPORT: PIT CLOSURE VERIFICATION

PAGE No: 1 of 1

LOCATION: NAME: McCULLY LS WELL#: SM TYPE: DEHY  
 QUAD/UNIT: D SEC: 24 TWP: 28N RNG: 9W PM: NM CNTY: SJ ST: NM  
 QTR/FOOTAGE: 1285 FNL x 1260 FWL NW(NW) CONTRACTOR: PXS (PUNDRER)

DATE STARTED: 11-29-05  
 DATE FINISHED: 11-29-05  
 ENVIRONMENTAL SPECIALIST: JCB

EXCAVATION APPROX. NA FT. x NA FT. x NA FT. DEEP. CUBIC YARDAGE: 0  
 DISPOSAL FACILITY: NA REMEDIATION METHOD: CLOSE AS IS  
 LAND USE: RANGE - BLM LEASE: NM 004208 FORMATION: MV

FIELD NOTES & REMARKS: PIT LOCATED APPROXIMATELY 93 FT. N41W FROM WELLHEAD.  
 DEPTH TO GROUNDWATER: >100 NEAREST WATER SOURCE: >1000 NEAREST SURFACE WATER: >1000  
 NMOCD RANKING SCORE: 0 NMOCD TPH CLOSURE STD: 5000 PPM

### SOIL AND EXCAVATION DESCRIPTION:

OVM CALIB. READ. = 52.0 ppm  
 OVM CALIB. GAS = 100 ppm RF = 0.52  
 TIME: 0930 am/pm DATE: 11/29

SOIL TYPE: SAND / SILTY SAND / SILT / SILTY CLAY / CLAY / GRAVEL (OTHER) BEDROCK SANDSTONE  
 SOIL COLOR: YELLOW/TAN  
 COHESION (ALL OTHERS): NON COHESIVE / SLIGHTLY COHESIVE / COHESIVE / HIGHLY COHESIVE  
 CONSISTENCY (NON COHESIVE SOILS): LOOSE / FIRM / DENSE / VERY DENSE  
 PLASTICITY (CLAYS): NON PLASTIC / SLIGHTLY PLASTIC / COHESIVE / MEDIUM PLASTIC / HIGHLY PLASTIC  
 DENSITY (COHESIVE CLAYS & SILTS): SOFT / FIRM / STIFF / VERY STIFF / HARD  
 MOISTURE: DRY / SLIGHTLY MOIST / MOIST / WET / SATURATED / SUPER SATURATED  
 DISCOLORATION/STAINING OBSERVED: YES / (NO) EXPLANATION -  
 HC ODOR DETECTED: YES / (NO) EXPLANATION -  
 SAMPLE TYPE: GRAB / COMPOSITE # OF PTS. 5  
 ADDITIONAL COMMENTS: 27 x 12 x 3 Earth Pit Excavated into Bedrock Sandstone. Use Backhoe to Collect Samples.  
BEDROCK BOTTOM

**CLOSED**

### FIELD 418.1 CALCULATIONS

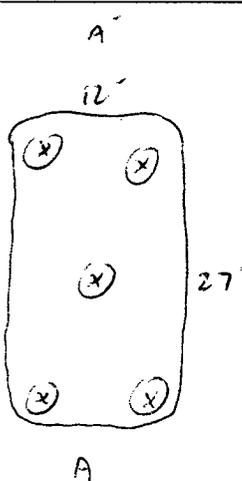
SAMP. TIME	SAMP. ID	LAB NO.	WEIGHT (g)	mL FREON	DILUTION	READING	CALC. (ppm)

### SCALE



0 FT

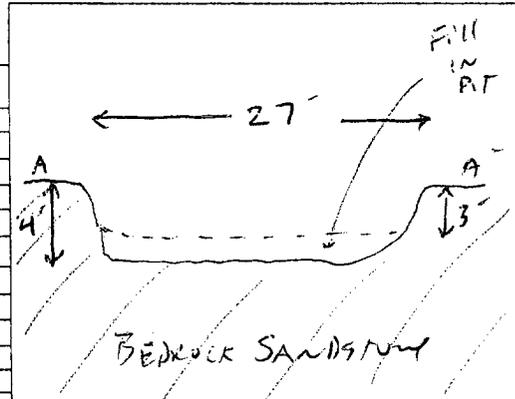
### PIT PERIMETER



### OVM READING

SAMPLE ID	FIELD HEADSPACE (ppm)
1 @	
2 @	
3 @	
4 @	
5 @	
5-Point	7.1
Composite @ 4'	

### PIT PROFILE



### LAB SAMPLES

SAMPLE ID	ANALYSIS	TIME
5-Point	TPH	1045
	BTEX	
	CL-	

P.D. = PIT DEPRESSION; B.G. = BELOW GRADE; B = BELOW T.H. = TEST HOLE; - = APPROX.; T.B. = TANK BOTTOM

TRAVEL NOTES: CALLOUT: \_\_\_\_\_ ONSITE: 11-29-05

# ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

## EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons


Client:	Blagg / BP	Project #:	94034-010
Sample ID:	5-Point Composite @ 4'	Date Reported:	11-30-05
Laboratory Number:	35284	Date Sampled:	11-29-05
Chain of Custody No:	14597	Date Received:	11-29-05
Sample Matrix:	Soil	Date Extracted:	11-30-05
Preservative:	Cool	Date Analyzed:	11-30-05
Condition:	Cool and Intact	Analysis Requested:	8015 TPH


Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	18.7	0.2
Diesel Range (C10 - C28)	9.6	0.1
Total Petroleum Hydrocarbons	28.3	0.2

ND - Parameter not detected at the stated detection limit.

References: Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: **McCulley LS 5M Dehy Pit.**

  
Analyst

  
Review

# ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

## EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	Blagg / BP	Project #:	94034-010
Sample ID:	5-Point Composite @ 4'	Date Reported:	11-30-05
Laboratory Number:	35284	Date Sampled:	11-29-05
Chain of Custody:	14597	Date Received:	11-29-05
Sample Matrix:	Soil	Date Analyzed:	11-30-05
Preservative:	Cool	Date Extracted:	11-30-05
Condition:	Cool & Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)
Benzene	5.2	1.8
Toluene	21.3	1.7
Ethylbenzene	54.1	1.5
p,m-Xylene	678	2.2
o-Xylene	166	1.0
<b>Total BTEX</b>	<b>925</b>	


ND - Parameter not detected at the stated detection limit.


Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	99.0 %
	1,4-difluorobenzene	99.0 %
	Bromochlorobenzene	99.0 %

References: Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: McCulley LS 5M Dehy Pit.

  
Analyst

  
Review

# ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

Chloride

Client:	Blagg / BP	Project #:	94034-010
Sample ID:	5-Point Composite @ 4'	Date Reported:	11-30-05
Lab ID#:	35284	Date Sampled:	11-29-05
Sample Matrix:	Soil	Date Received:	11-29-05
Preservative:	Cool	Date Analyzed:	11-30-05
Condition:	Cool and Intact	Chain of Custody:	14597

Parameter


Concentration (mg/Kg)


Total Chloride

23.7

Reference: Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: McCulley LS 5M Dehy Pit.

  
Analyst

  
Review

District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Avenue, Artesia, NM 88210  
District III  
1000 Rio Brazos Road, Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy Minerals and Natural Resources

Form C-144  
June 1, 2004

Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

For drilling and production facilities, submit to appropriate NMOCD District Office.  
For downstream facilities, submit to Santa Fe office

**Pit or Below-Grade Tank Registration or Closure**

Is pit or below-grade tank covered by a "general plan"? Yes  No

Type of action: Registration of a pit or below-grade tank  Closure of a pit or below-grade tank


Operator: BP AMERICA PROD. CO. Telephone: (505)-326-9200 e-mail address: \_\_\_\_\_  
Address: 200 ENERGY COURT. FARMINGTON. NM 87410  
Facility or well name: McCULLEY LS #5M API #: 30-045- 26544 U/L or Qtr/Qtr D Sec 24 T 28N R 9W  
County: SAN JUAN Latitude 36.65130 Longitude 107.74466 NAD: 1927  1983  Surface Owner Federal  State  Private  Indian

<u>Pit</u>	<u>Below-grade tank</u>	
Type: Drilling <input type="checkbox"/> Production <input type="checkbox"/> Disposal <input checked="" type="checkbox"/> <u>SEPARATOR</u> Workover <input type="checkbox"/> Emergency <input type="checkbox"/> Lined <input type="checkbox"/> Unlined <input checked="" type="checkbox"/> Liner type: Synthetic <input type="checkbox"/> Thickness _____ mil Clay <input type="checkbox"/> Pit Volume _____ bbl	Volume: _____ bbl Type of fluid: _____ Construction material: <u>N/A</u> Double-walled, with leak detection? Yes <input type="checkbox"/> If not, explain why not.	
Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)	Less than 50 feet	(20 points)
	50 feet or more, but less than 100 feet	(10 points) <b>0</b>
	100 feet or more	( 0 points)
Wellhead protection area: (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)	Yes	(20 points)
	No	( 0 points) <b>0</b>
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)	Less than 200 feet	(20 points)
	200 feet or more, but less than 1000 feet	(10 points) <b>0</b>
	1000 feet or more	( 0 points)
<b>Ranking Score (Total Points)</b>		<b>0</b>

If this is a pit closure: (1) attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location: (check the onsite box if you are burying in place) onsite  offsite  If offsite, name of facility BP CROUCH MESA LF. (3) Attach a general description of remedial action taken including remediation start date and end date. (4) Groundwater encountered: No  Yes  If yes, show depth below ground surface \_\_\_\_\_ ft. and attach sample results. (5)

Attach soil sample results and a diagram of sample locations and excavations.

Additional Comments: PIT LOCATED APPROXIMATELY 90 FT. S41E FROM WELL HEAD.  
PIT EXCAVATION: WIDTH 20 ft., LENGTH 20 ft., DEPTH 8 ft.  
PIT REMEDIATION: CLOSE AS IS: , LANDFARM: , COMPOST: , STOCKPILE: , OTHER  EXCAVATE  
Cubic yards: 70  
BEDROCK BOTTOM



I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines , a general permit , or an alternative OCD-approved plan .

Date: 11/30/05

Printed Name/Title Jeff Blagg - P.E. # 11607 Signature \_\_\_\_\_

Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.

Approval: \_\_\_\_\_  
Printed Name/Title DEPUTY OIL & GAS INSPECTOR, DIST. #3 Signature \_\_\_\_\_ Date: FEB 28 2006

CLIENT: <u>BP</u>	<b>BLAGG ENGINEERING, INC.</b> P.O. BOX 87, BLOOMFIELD, NM 87413 (505) 632-1199	LOCATION NO: <u>81711</u>
		COCR NO: <u>14597</u>

### FIELD REPORT: PIT CLOSURE VERIFICATION

PAGE No: 1 of 1

LOCATION: NAME: McCULLY LS WELL#: SM TYPE: SEP  
 QUAD/UNIT: D SEC: 24 TWP: 28N RNG: 9W PM: NM CNTY: SJ ST: NM  
 QTR/FOOTAGE: 1285 FNL x 1260 FWL <sup>NW/4</sup> CONTRACTOR: PXS (PAXANDER)

DATE STARTED: 11-29-05  
 DATE FINISHED: 11-29-05  
 ENVIRONMENTAL SPECIALIST: JCB

EXCAVATION APPROX. 20 FT. x 20 FT. x 8 FT. DEEP. CUBIC YARDAGE: 70 ±  
 DISPOSAL FACILITY: BP CROUCH MESA L.F. REMEDIATION METHOD: EXCAVATE  
 LAND USE: RANGE - BLM LEASE: NM 004208 FORMATION: MV

FIELD NOTES & REMARKS: PIT LOCATED APPROXIMATELY 90 FT. S41E FROM WELLHEAD.  
 DEPTH TO GROUNDWATER: >100 NEAREST WATER SOURCE: >1000 NEAREST SURFACE WATER: >1000  
 NMOCD RANKING SCORE: 0 NMOCD TPH CLOSURE STD: 5000 PPM

#### SOIL AND EXCAVATION DESCRIPTION:

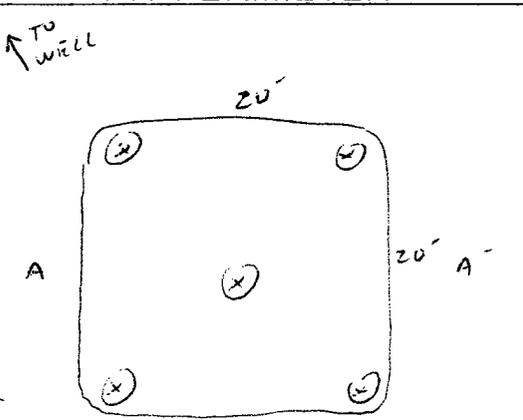
OVM CALIB. READ. = 52.0 ppm  
 OVM CALIB. GAS = 100 ppm RF = 0.52  
 TIME: 0930 am/pm DATE: 11/29

SOIL TYPE: SAND / SILTY SAND / SILT / SILTY CLAY / CLAY / GRAVEL / OTHER BEDROCK SANDSTONE @ 8'  
 SOIL COLOR: \_\_\_\_\_  
 COHESION (ALL OTHERS): NON COHESIVE / SLIGHTLY COHESIVE / COHESIVE / HIGHLY COHESIVE  
 CONSISTENCY (NON COHESIVE SOILS): LOOSE / FIRM / DENSE / VERY DENSE  
 PLASTICITY (CLAYS): NON PLASTIC / SLIGHTLY PLASTIC / COHESIVE / MEDIUM PLASTIC / HIGHLY PLASTIC  
 DENSITY (COHESIVE CLAYS & SILTS): SOFT / FIRM / STIFF / VERY STIFF / HARD CLOSED  
 MOISTURE: DRY / SLIGHTLY MOIST / MOIST / WET / SATURATED / SUPER SATURATED  
 DISCOLORATION/STAINING OBSERVED: YES NO EXPLANATION - Gray/Black in Removed Soils  
 HC ODOR DETECTED: YES NO EXPLANATION - Strong  
 SAMPLE TYPE: GRAB COMPOSITE # OF PTS. 5 18 x 18 x 4' - Eastern Pit. Use Backhoe to Remove  
 ADDITIONAL COMMENTS: Gray/Black soils to Bedrock Sandstone @ 8'  
BEDROCK BOTTOM

#### FIELD 418.1 CALCULATIONS

SCALE	SAMP. TIME	SAMP. ID	LAB NO.	WEIGHT (g)	mL FREON	DILUTION	READING	CALC. (ppm)
0 FT								

#### PIT PERIMETER



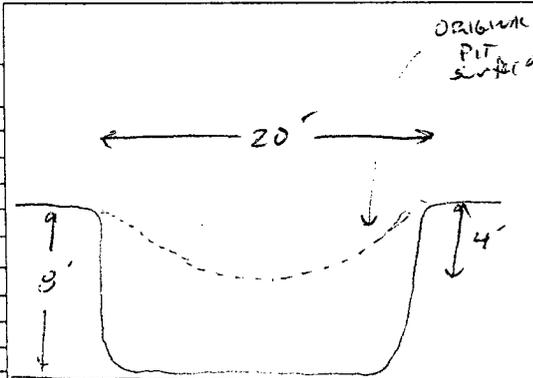
#### OVM READING

SAMPLE ID	FIELD HEADSPACE (ppm)
1 @	
2 @	
3 @	
4 @	
5 @	
5-Point	211
Composite @ 8'	

#### LAB SAMPLES

SAMPLE ID	ANALYSIS	TIME
5-Point	TOT	1115
	BTEX	
	CL-	
	<u>PASSED</u>	

#### PIT PROFILE



P.D. = PIT DEPRESSION; B.G. = BELOW GRADE; B = BELOW T.H. = TEST HOLE; - = APPROX.; T.B. = TANK BOTTOM

TRAVEL NOTES: CALLOUT: \_\_\_\_\_ ONSITE: 11/29/05

# ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

## EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client:	Blagg / BP	Project #:	94034-010
Sample ID:	5-Point Composite @ 8'	Date Reported:	11-30-05
Laboratory Number:	35286	Date Sampled:	11-29-05
Chain of Custody No:	14597	Date Received:	11-29-05
Sample Matrix:	Soil	Date Extracted:	11-30-05
Preservative:	Cool	Date Analyzed:	11-30-05
Condition:	Cool and Intact	Analysis Requested:	8015 TPH


Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	68.9	0.2
Diesel Range (C10 - C28)	143	0.1
Total Petroleum Hydrocarbons	212	0.2

ND - Parameter not detected at the stated detection limit.

References: Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: **McCulley LS 5M Sep. Pit.**

  
Analyst

  
Review

# ENVIROTECH LABS

PRactical SOLUTIONS FOR A BETTER TOMORROW

## EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	Blagg / BP	Project #:	94034-010
Sample ID:	5-Point Composite @ 8'	Date Reported:	11-30-05
Laboratory Number:	35286	Date Sampled:	11-29-05
Chain of Custody:	14597	Date Received:	11-29-05
Sample Matrix:	Soil	Date Analyzed:	11-30-05
Preservative:	Cool	Date Extracted:	11-30-05
Condition:	Cool & Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)
Benzene	20.2	1.8
Toluene	52.8	1.7
Ethylbenzene	293	1.5
p,m-Xylene	1,890	2.2
o-Xylene	596	1.0
<b>Total BTEX</b>	<b>2,850</b>	


ND - Parameter not detected at the stated detection limit.


Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	98.0 %
	1,4-difluorobenzene	98.0 %
	Bromochlorobenzene	98.0 %

References: Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: McCulley LS 5M Sep. Pit.

  
Analyst

  
Review

# ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

Chloride

Client:	Blagg / BP	Project #:	94034-010
Sample ID:	5-Point Composite @ 8'	Date Reported:	11-30-05
Lab ID#:	35286	Date Sampled:	11-29-05
Sample Matrix:	Soil	Date Received:	11-29-05
Preservative:	Cool	Date Analyzed:	11-30-05
Condition:	Cool and Intact	Chain of Custody:	14597

Parameter


Concentration (mg/Kg)


Total Chloride

31.9

Reference: Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: McCulley LS 5M Sep. Pit.

  
Analyst

  
Review