



UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

5. Lease Serial No. NMNM 53926
6. If Indian, Allottee or Tribe Name
7. If Unit or CA Agreement, Name and No. Federal 20-6-7
8. Lease Name and Well No. 1
9. API Well No. 30-031-21094
10. Field and Pool, or Exploratory Basin Fruitland Coal
11. Sec., T., R., M., or Blk. and Survey or Area B Section 7, 20N, 6W
12. County or Parish McKinley
13. State NM

1a. Type of Work: ☒ DRILL ☐ REENTER		
1b. Type of Well: ☐ Oil Well ☒ Gas Well ☐ Other ☒ Single Zone ☐ Multiple Zone		
2. Name of Operator SG Interests I, LTD c/o NIKA Energy Operating		
3a. Address P.O. Box 2677 Durango, CO 81302	3b. Phone No. (include area code) (970) 259-2701	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface 990' FNL & 1650' FEL At proposed prod. zone		
14. Distance in miles and direction from nearest town or post office* approximately 17 miles southeast of Counselor, New Mexico		
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 990'	16. No. of Acres in lease 1,565.560	17. Spacing Unit dedicated to this well N/2 321.08 AC
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. See attached map	19. Proposed Depth 650'	20. BLM/BIA Bond No. on file NM 1935
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 6,691 GR	22. Approximate date work will start* as soon as permitted	23. Estimated duration 1 month

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|--|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature 	Name (Printed/Typed) William Schwab III	Date 6/28/06
Title President NIKA Energy Operating/ Agent for SG Interests I, LTD		
Approved by (Signature) 	Name (Printed/Typed) AFM	Date 8/2/06
Title PFO		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

SG Interests I, LTD. proposes to drill a well to develop the Basin Fruitland Coal formation at the above described location in accordance with the attached drilling and surface use plans.

The surface is under jurisdiction of the Bureau of Land Management, Farmington Field Office.

This location has been archaeologically surveyed by Aztec Archaeological Consultants. Copies of their report have been submitted directly to the BLM.



NMOC

This action is subject to technical and procedural review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4

DRILLING OPERATIONS AUTHORIZED ARE SUBJECT TO COMPLIANCE WITH ATTACHED "GENERAL REQUIREMENTS".

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1680 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised June 10, 2003
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-031-21094	Pool Code 71629	Pool Name Basin Fruitland Coal
Property Code 35913	Property Name FEDERAL 20-6-7	Well Number 1
OGRID No. 20572	Operator Name SQ INTERESTS I, LTD.	Elevation 6691'

10 Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	7	20N	6W		990	NORTH	1650	EAST	MCKINLEY

11 Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

Dedicated Acres 321.08	Joint or Infill	Consolidation Code	Order No.
----------------------------------	-----------------	--------------------	-----------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

16 (20.22 ch.) LOT 1	(20.00 ch.) WEST LAT. 35.98387° N LONG. 107.51062° W	40.00 ch. 1650'	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief. Signature: <i>William E. Mahinke II</i> Printed Name: William E. Mahinke II Title and E-mail Address: Agent for SQ Interests Date: 11/10/05
80.0 ch. LOT 2		80.0 ch.	
NORTH LOT 3		80.0 ch. W	
LOT 4	WEST 80.42 ch.		
18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Date of Survey: October 30, 2005 Signature and Seal of Professional Surveyor: <i>William E. Mahinke II</i> WILLIAM E. MAHINKE II Certificate Number: 8466			

Submit 3 Copies To Appropriate District Office

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
May 27, 2004

WELL API NO. 30-031-21094

5. Indicate Type of Lease
STATE ☐ FEE ☐ FED ☒

6. State Oil & Gas Lease No.
Federal NM 53926

7. Lease Name or Unit Agreement Name

Federal 20-6-7

8. Well Number #1

9. OGRID Number

10. Pool name or Wildcat
Fruitland Coal

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other

2. Name of Operator SG Interests I, Ltd

3. Address of Operator
C/O Nika Energy Operating, PO Box 2677, Durango, CO, 81303

4. Well Location

Unit Letter B: 990 feet from the North line and 1650 feet from the East line

Section 7 Township 20N Range 6W NMPM County McKinley

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

Pit or Below-grade Tank Application ☒ or Closure ☐

Pit type Drilling Depth to Groundwater > 100 ft. Distance from nearest fresh water well > 1,000 ft. Distance from nearest surface water > 800 ft.

Pit Liner Thickness: 12 mil Below-Grade Tank: Volume 1000 bbls; Construction Material Synthetic

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐

OTHER: Pit Application ☒

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Drilling Pit application for New Well.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed of closed according to NMOCD guidelines ☒, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE

TITLE

DATE

Type or print name William Schwab III

E-mail address: tripp@nikaenergy.com

Telephone No. 970-259-2701

For State Use Only

APPROVED BY:

TITLE

DEPUTY OIL & GAS INSPECTOR, DIST. #


DATE

Conditions of Approval (if any):

SG INTERESTS I, LTD.

FEDERAL 20-6-7 #1


990' FNL, 1650' FEL SECTION 7, T20N, R6W, NMPM
McKINLEY COUNTY, N.M.

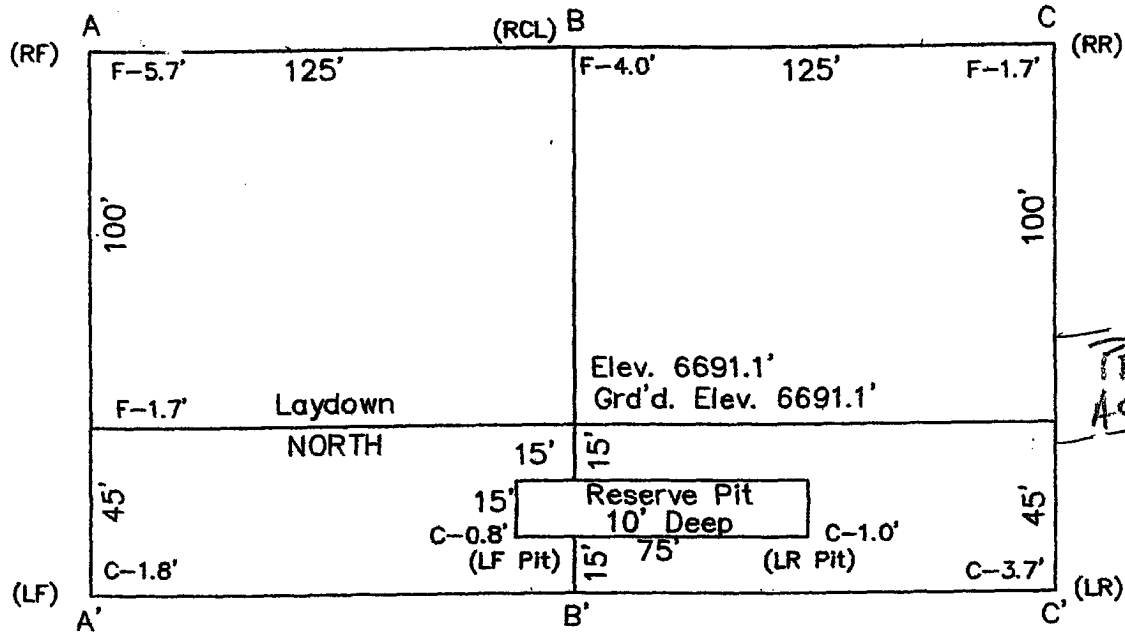


Scale: 1"=50'




A-A' Vert.: 1"=20' Horiz.: 1"=50' C/L

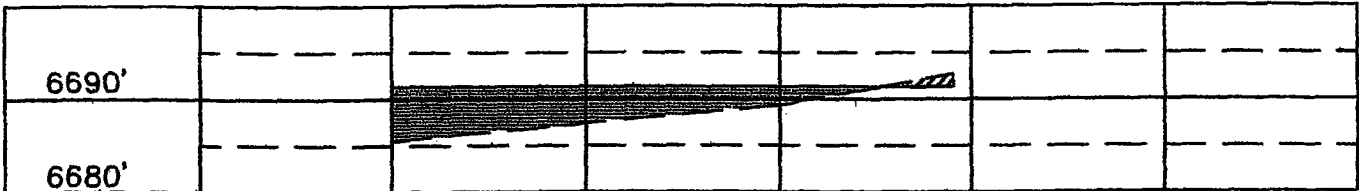

B-B'

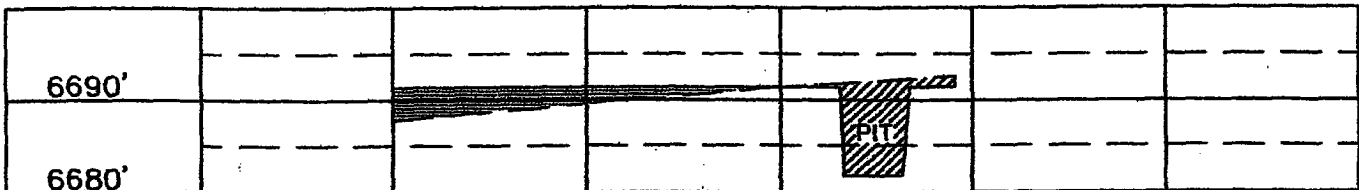

C-C'

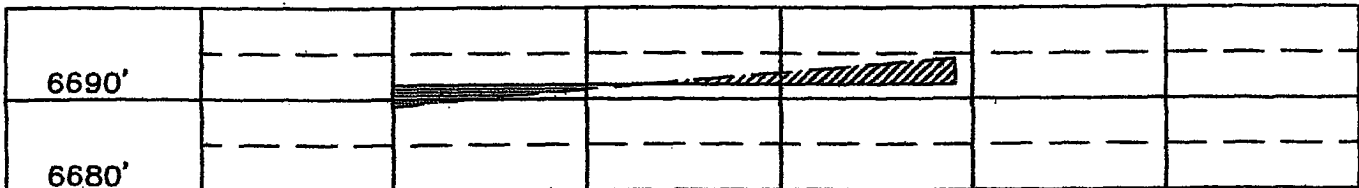

SG Interests I, Ltd.
(Agent: Nika Energy Operating, LLC)
PO Box 2677
Durango, CO 81302
(970) 259-2701

Federal 20-6-7 #1
NWNE Sec 7-20N-R6W
990' FNL & 1650' FEL
McKinley County, New Mexico

EIGHT POINT DRILLING PROGRAM

1. Estimated Formation Tops:

Ojo Alamo	surface
Kirtland	100'
Fruitland	275'
PC	500'
Total Depth	650'

2. Estimated Depth of Anticipated Minerals:

Fruitland (Gas)	475'
-----------------	------

3. Minimum Specifications for Pressure Control Equipment:

BOP equipment and accessories will meet or exceed BLM requirements outlined in 43 CFR Part 3160.

A 2000 psig double ram hydraulic BOP will be used (see attached diagram). Accessories to the BOP will meet BLM requirements for a 2000 psig system. The accumulator system capacity will be sufficient to close all BOPE with a 50% safety factor. Fill line, kill line and line to choke manifold will be 2". BOP's will be function tested every 24 hours and will be recorded on IADC log.

Surface casing will be tested to 1500 psig for 30 minutes.

Eight Point Drilling Program - Federal 20-6-7 #1

Page 2

Accessories to BOPE will include upper and lower Kelly cocks with handles, stabbing valve to fit drill pipe on floor at all times, string float at bit, 2000 psig choke manifold with 2" adjustable and 2" positive chokes, and pressure gauge.

4. Casing and Cementing Program:

<u>Hole Size</u>	<u>Interval</u>	<u>Csg Size</u>	<u>Wt, Grd, Jt</u>
12-1/4"	0-150'	7" 8 5/8"	20#, J-55, STC
7-7/8"	0-650'	4-1/2"	10.5#, J-55, STC

Surface Casing will be cemented with 140 sx (165 cu ft) class B w/2% CaCl and 1/4#/sx of celloflake (Yield = 1.18 cuft/sx, Weight = 15.6 #/gal). Cement volumes include excess to circulate cement to surface. A guide shoe, insert float and three (3) centralizers will be used. WOC time is 8 hours. The casing will be pressure tested to 1500 psig.

Production Casing will be cemented with ^{P10}80 sx ²²⁴(94 cu ft) class B w/2% CaCl and 1/4#/sx celloflake (Yield = 1.18 cuft/sx, Weight = 15.6 #/gal). Cement volume includes excess to circulate cement to surface. In the event cement is not circulated a temperature survey will be run to determine the actual cement top. Cementing equipment will include a guide shoe, float collar and 7 centralizers. Class G or H cement may be used depending on availability of Class B. ^{per Tripp Schwab 7/31/04}

5. Mud Program:

A native water based mud system (FW) will be used initially followed by a low-solids, non-dispersed gel system (LSND) as needed to condition the hole for logs. Adequate amounts of lost circulation and weighting material will be on location if needed as well as sorbitive agents to handle potential spills of fuel or lubricants.

<u>Depth</u>	<u>Type</u>	<u>Wt (ppg)</u>	<u>Vis (sec)</u>	<u>Wtr loss</u>
0-150'	FW	± 8.5	30-33	NC
150'-TD	FW & LSND	± 8.7-9.1	30-50	8-10 cc

6. Testing, Coring and Logging Program:

No DST's or cores are planned. Openhole logs if run will include GR, Induction, Density and Caliper Logs. The GR-Density logs will be run from TD to the top of the Fruitland formation. GR-Induction-Caliper logs will be run from TD to the bottom of the surface casing.

7. Anticipated Abnormal Pressures and Temperatures:

No abnormal pressures or temperatures are expected in this well. Maximum anticipated Fruitland reservoir pressure is 300 psig with a normal temperature gradient.

8. Operations:

Anticipated spud date is July 2006 or as soon as permits are received and work can be scheduled. Estimated drilling time is 4 - 5 days. The Fruitland will be completed as a cased hole completion, perforated and hydraulically fracture stimulated. Completion operations are expected to take 5 - 7 days and will commence as soon after completion of drilling operations and scheduling allow.

NIKA ENERGY OPERATING, LLC
SG INTERESTS I, LTD.

WELL NAME: Federal 20-6-7 #1

FIELD NAME: Basin Fruitland Coal

LOCATION: Sec 7-T20N-R6W
UL B; 990' FNL & 1650' FEL
McKinley County, New Mexico

PROPOSED TD: 650'

DRILLING SKELETON:

<u>Interval</u>	<u>Hole Size</u>	<u>Casing Size</u>	<u>Depth</u>
Surface	12-1/4"	8-5/8"	150'
Production	7-7/8"	4-1/2"	650'

MUD PROGRAM:

<u>Interval</u>	<u>Mud Type</u>	<u>Mud Weight</u>	<u>Funnel Viscosity</u>	<u>Water Loss</u>
0 - 150'	Native	8.5 - 9.1	30 - 50	N/C
150' - TD	Native/LSND	8.5 - 9.1	30 - 50	8 - 10

CORE PROGRAM: None

ELECTRICAL LOGGING PROGRAM: Openhole logs will include a GR/Caliper and a DIL/Formation Density log from TD to the surface casing shoe

Fruitland Drilling Program - Federal 20-6-7 #1

Page 2

CASING AND CEMENTING PROGRAM:

<u>Interval</u>	<u>Size, Wt, Grade, Thread</u>	<u>Depth</u>	<u>Cement</u>
Surface	8-5/8", ^{24#} 20#, J-55, ST&C	150'	140 sx Class B w/2% CaCl + 1/4#/sx celloflake
Production	4-1/2", 10.5#, J-55, ST&C	TD	80 sx Class B. Both slurries to contain 1/4#/sx celloflake.

WELLHEAD: 3000# Independent Style

BLOWOUT PREVENTION EQUIPMENT REQUIREMENTS:

<u>Description</u>	<u>Rating</u>
Double Ram Type Preventer	2000 psi
Rotating Head	2000 psi

BOPE testing will be done by third party testers in accordance with Onshore Order No. 2. The test must be performed and recorded using a test pump, calibrated test gauges and properly calibrated strip or chart recorder. The test gauges and recorders must be of the proper range and resolution commensurate with the authorized test pressure. The test must be recorded in the driller's log and will include a low pressure test requirement of 250 psig held for 5 minutes and a high pressure test requirement held for 10 minutes. Casing pressure tests must be held for 30 minutes with no more than 10 percent pressure drop during the test.

Fruitland Drilling Program - Federal 20-6-7 #1

Page 3

GEOLOGIC PROGNOSIS:

Elevations: GL ~ 6691', KB ~ 6696'

Formation Tops:

<u>Formation</u>	<u>Depth</u>
Ojo Alamo	surface
Kirtland	100'
Fruitland	275'
Coal Top	475'
PC	500'
Total Depth	650'

Note: TD will be 150' below the lowest coal. The company man will be on location once coals are penetrated until TD to monitor drilling breaks and to insure that 150' of rathole is drilled. When the hole is logged, if a coal zone is indicated within 150' of bottom, additional hole is to be drilled to provide 150' of rathole. Log of offset well(s) (Federal 20-6-4 #4, Federal 20-6-3 #3) are enclosed for correlation.

MUD PROGRAM:

A fresh water native mud (using lime, benex & gel additions) will be used to drill the surface hole. The 7-7/8" hole should be drilled with native mud and a LSND mud as necessary for hole stability just before the top of the Fruitland formation is encountered.

At the top of the Fruitland formation mud weights should be sufficient to control pressures; viscosity should be in the 30 - 50 sec range with a water loss of 8 - 10 cc, as needed.

The Fruitland Coals are expected to be under-pressured to normal-pressured and may encounter lost circulation. LCM should be stored on location and used as needed in the event of lost circulation. Barite should also be on location in the event an over-pressured zone is encountered and a kick is taken.

CASING AND CEMENTING PROCEDURE:

Note: Notify BLM 24 hours prior to spud and testing of BOP's and cementing. 505-599-8907. Note the new (June 1, 2005) Federal (BLM) requirements for the testing and test recording of the Blow-out Preventer Equipment. A copy is attached to the approved APD.

Surface Casing:

1. Drill to a minimum of 150' to accommodate tallied 8-5/8" casing plus 3'. Casing tally to be taken on location.
2. Use a landing joint of 8-5/8" casing to set casing at ground level. Guide shoe on casing should be not more than 2 feet off bottom. Casing head flange to be set at ground level.
3. Displace hole with casing volume of fresh water ahead of cement.
4. Pump Class B cement with 2% CaCl at 5-7 barrel per minute.
5. Drop top plug and displace with fresh water when preflush returns are observed at the surface. Do not over-displace.
6. If plug does not bump, hold pressure for a minimum of three hours.
 - a. Wait on cement a minimum of 8 hours or until surface samples are hard *, whichever is longer before nipping up the BOP. Install test plug in casing head and pressure test stack to 2000 psig for 30 minutes.
 1. * Note: The BLM requirement is a minimum of 250 psi @ 60degrees F compressive strength before BOP may be nipped up.
 2. Notes: Use a standard 8-5/8" guide shoe, a 8-5/8" insert float, 3 centralizers and 1 stop ring. Set insert on top of first joint. Bakerlok shoe, float collar and bottom two joints of casing.

Production Casing:

1. Roll casing off truck with thread protectors in place.
2. Visually inspect, rabbit, number, and tally casing on racks. Remove thread protectors and clean threads. Use quick release protectors while running casing. Do not move or roll casing without thread protectors in place.
3. Change out pipe rams to accommodate 4-1/2" casing.
4. Bakerlok 4-1/2" float shoe to bottom of first joint of casing.
5. Bakerlok 4-1/2" differential float collar to top of first joint of casing. Bakerlok second joint of casing into top of float collar. Run "marker joint" 100' above top coal as per openhole logs.
6. Casing should be made up to proper torque (1320 ft-lb for 10.5# or 1540 ft-lb for 11.6#) using an API thread compound.
7. Casing should be run no faster than 2 feet per second (20 seconds per 40 foot joint). At the first indication of mud loss, the running time should be doubled to 40 seconds per joint (1 foot per second).
8. Break circulation at 250 feet and 550 feet and circulate a minimum of 15 minutes. Make sure that the hole is not flowing. Adjust mud properties as necessary. Circulate the last joint of casing to TD. Kick pumps in slowly to minimize surge pressures.
9. Turbolizing centralizers should be run on each of the first 7 joints. A stop-ring should be used to hold the first centralizer in place. Place the remaining centralizers on collars.
10. After casing is landed at TD, circulate hole until mud properties measured at the flowline are within the ranges given in the "Mud Program" of this drilling prognosis.
11. Rig up rotational cementing head and return lines. Chixson should be long enough to allow 25'-30' reciprocation.
12. Pump 10 barrels of fresh water. Pump 20 barrel chemical wash. Pump cement slurry. Wash lines.
13. Drop top plug and displace with water. Do not over-displace. Pipe should be rotated at 10-20 RPM or reciprocated at least 20 feet every two to three minutes throughout displacement.
14. Bump plug with 500 psi over final displacement pressure. Hold pressure for 5 minutes. If plug does not bump, hold initial shut down pressure on casing for 5 minutes. Then check to see that float is holding (flow back into cement pump tank).

Production Casing cont.

15. Set slips, cut off casing and nipple down BOP. A thread protector or some other appropriate obstruction should be placed on the top of the casing stub to prevent loss of material downhole.

Cement Slurry Designs and Notes

<u>Slurry</u>	<u>Cement & Additives</u>	<u>Water Requirements</u>	<u>Weight</u>	<u>Yield</u>
Production	Class B + 1/4#/sx celloflake	5.2 gals/sx	15.6 ppg	1.18 cu.ft/sk

Figure slurry volume as follows: Calculate slurry using caliper volume + 50% excess. Cement volume shown in this prognosis is based on hole and casing size and surface/long string annular volumes plus percentage excess shown above.

NOTES:

1. Pump rates should be a minimum of 4 BPM through displacement.
2. Slurry weights should be measured using a mud balance at least every 10 minutes during mixing.
3. At least two samples of the tail should be caught and monitored at room temperature for thickening time.
4. Run Temperature Log if cement does not circulate.

Blow Out Preventer (BOP) Exhibit #1

2-M SYSTEM

