

37- 30-039-07895
432- 30-039-24225

3476

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit B Sec. 10 Twp 30 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #37, #432

cps 2060w

Elevation 6317' Completion Date 12/12/88 Total Depth 500' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 290'

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 445', 435', 428', 420', 413', 350', 342', 335', 325', 315'

Depths vent pipes placed: 500'

Vent pipe perforations: 260'

Remarks: gb #2

RECEIVED
MAY 31 1991

OIL CON. DIV
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING CATHODIC PROTECTION CONSTRUCTION REPORT DAILY LOG

Comp 8-13-88

Drilling Log (Attach Hereto) ☐

Completion Date 12/12/88

CPS #	Well Name, Line or Plant:	Work Order #	Static:	Ins. Union Check
2060W	30-6 #432	3143A	.60V 600' S	☒ Good ☐ Bad
	30-6 #37 (224W)	69760		
Location:	Anode Size:	Anode Type:	Size Bit:	
B-10-30-6	2" X 60"	DURION	6 3/4"	
Depth Drilled	Depth Logged	Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used
500'	500'			
Anode Depth				
# 1 445	# 2 435	# 3 428	# 4 420	# 5 413
# 6 350	# 7 342	# 8 335	# 9 325	# 10 315
Anode Output (Amps)				
# 1 2.0	# 2 2.8	# 3 3.2	# 4 2.6	# 5 2.2
# 6 2.5	# 7 2.5	# 8 2.8	# 9 2.8	# 10 2.5
Anode Depth				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance			No. 8 C.P. Cable Used	No. 2 C.P. Cable Used
Volts 11.9	Amps 11.0	Ohms 1.08		

Remarks: WATER AT 290, STATIC WATER NEXT AM. AT 250. WATER SAMPLE FROZE. INSTALLED 500' of 1" P.U.C. VENT pipe, PERFORATED 260'.

~~Request stack loop to be hooked back up~~
We will pull the old pole & set a new one mtr 4551043.

G.B. 4074.00

275-3-13-00990-0

Rectifier Size:	40V	16A	669.00
Add'l Depth	0		
Depth Credit:	0		
Extra Cable:	802.24	192.48 ✓	
Ditch & 1 Cable:	387.70	270.90 ✓	
25' Meter Pole:	1	307.00 ✓	
20' Meter Pole:	0		
10' Stub Pole:	0		


All Construction Completed

(Signature)

GROUND BED LAYOUT SKETCH

1 Jct. BOX

225.00V
5738.38
TAX 286.92
TOTAL \$ 6025.30

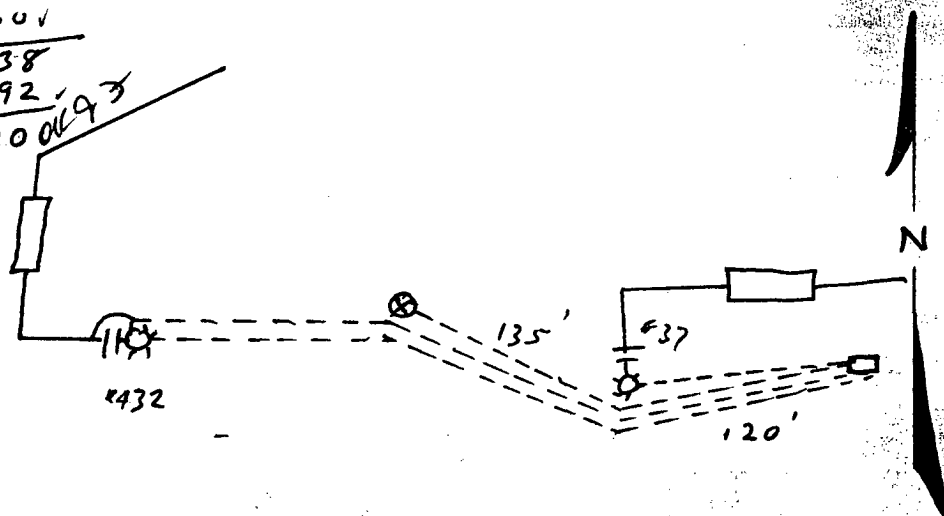

DRILLING CO.

Drill No. 10

DRILLER'S WELL LOG

S. P. No. ST 30-6 432 Date _____

Client _____ Prospect _____

County _____ State _____

If hole is a redrill or if moved from original staked position show distance and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	10	Shale
10	90	Shale
90	130	Limestone
130	140	Shale
140	180	Limestone
180	200	Shale
200	500	Limestone

Mud _____ Bran _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: Water 290'

Driller [Signature]