

30-645-13112

4654

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit K Sec. 29 Twp 30 Rng 9

Name of Well/Wells or Pipeline Serviced MANSFIELD #7

cps 62w

Elevation 6027' Completion Date 10/24/69 Total Depth 280' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 100'

RECEIVED

MAY 31 1991

Depths gas encountered: N/A

OIL CON. DIV
DIST. 3

Type & amount of coke breeze used: 3960 lbs.

Depths anodes placed: 235', 229', 223', 217', 211', 205', 190', 184'

Depths vent pipes placed: 229' 3/4" HOSE

Vent pipe perforations: 229'

Remarks: gb #2 USED PLASTIC MOULDS TO POUR ANODE CAPS. POURED EPOXY OVER SHRINK

SIFFEVES.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

5" #78744-256'
5 1/8" #203-24'

Drilling Log (Attach Hereto). ☐

Completion Date 10/24/69


Well Name <u>TRANS FIELD #7</u>		Location <u>SN 29-30-9</u>		CPS No. <u>62 W</u>	
Type & Size Bit Used <u>7 7/8" #89475-245'</u>		Type & Size Bit Used <u>7 7/8" #29381-35'</u>		Work Order No. <u>134-54225-50-20</u>	
Anode Hole Depth <u>280'</u>	Total Drilling Rig Time <u>28 1/2 hr.</u>	Total Lbs. Coke Used <u>3960</u>	Lost Circulation Mat'l Used <u>0</u>	No. Sacks Mud Used <u>2</u>	
Anode Depth					
#1 <u>235'</u>	#2 <u>229'</u>	#3 <u>223'</u>	#4 <u>217'</u>	#5 <u>211'</u>	#6 <u>205'</u>
#7 <u>190'</u>	#8 <u>184'</u>	#9	#10		
Anode Output (Amps)					
#1 <u>9.6</u>	#2 <u>9.4</u>	#3 <u>8.3</u>	#4 <u>8.3</u>	#5 <u>8.3</u>	#6 <u>8.1</u>
#7 <u>6.8</u>	#8 <u>7.6</u>	#9	#10		
Anode Depth					
#11	#12	#13	#14	#15	#16
#17	#18	#19	#20		
Anode Output (Amps)					
#11	#12	#13	#14	#15	#16
#17	#18	#19	#20		
Total Circuit Resistance		No. 8 C.P. Cable Used		No. 2 C.P. Cable Used	
Volts <u>11</u>	Amps <u>23</u>	Ohms <u>.48</u>	<u>1904'</u>	<u>C</u>	

Remarks: 3/4" VENT HOSE ON #2 ANODE PERFORATED TO THE TOP OF HOE
USED 25 LB BARRA FCS
USED PLASTIC MOCULDS TO PERFORATE ANODE CAPS.
POURED EPOXY OVER SHRINK SLEEVES

All Construction Completed

JE. Mott
(Signature)

GROUND BED LAYOUT SKETCH

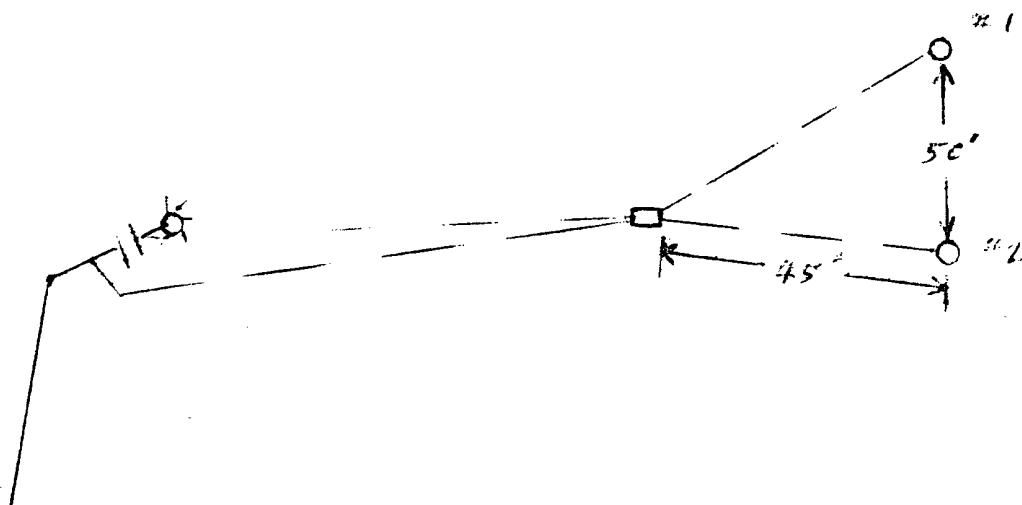

317# 2003 5/9 " 24"

19

EVENING

NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.
BIT NO.	NO. DC	SIZE	LENG.	BIT NO.	NO. DC
SERIAL NO.	STANDS	SERIAL NO.	STANDS	SERIAL NO.	STANDS
SIZE	SINGLES	SIZE	SINGLES	SIZE	SINGLES
TYPE	DOWN ON KELLY	TYPE	DOWN ON KELLY	TYPE	DOWN ON KELLY
MAKE	TOTAL DEPTH	MAKE	TOTAL DEPTH	MAKE	TOTAL DEPTH

[illegible]

REMARKS -

5⁰⁰-1057 One at 135' - Type sticky w h.c. - packed on top
11-12-68 at 135' - both 1-p 5' ph.

best fits

10-23-65 - Kirtland Field
Chgo. to L.A.
8:45 - Chgo. to L.A.
7:15 - Chgo. to L.A.
Chgo. to L.A.
Chgo. to L.A.

Year	Age	Sex	Weight (kg)	Length (cm)	Condition
1951	1	M	1.50	40.0	Good
1952	2	F	1.50	40.0	Good
1953	3	M	1.50	40.0	Good
1954	4	F	1.50	40.0	Good
1955	5	M	1.50	40.0	Good
1956	6	F	1.50	40.0	Good
1957	7	M	1.50	40.0	Good
1958	8	F	1.50	40.0	Good
1959	9	M	1.50	40.0	Good
1960	10	F	1.50	40.0	Good
1961	11	M	1.50	40.0	Good
1962	12	F	1.50	40.0	Good
1963	13	M	1.50	40.0	Good
1964	14	F	1.50	40.0	Good
1965	15	M	1.50	40.0	Good
1966	16	F	1.50	40.0	Good
1967	17	M	1.50	40.0	Good
1968	18	F	1.50	40.0	Good
1969	19	M	1.50	40.0	Good
1970	20	F	1.50	40.0	Good
1971	21	M	1.50	40.0	Good
1972	22	F	1.50	40.0	Good
1973	23	M	1.50	40.0	Good
1974	24	F	1.50	40.0	Good
1975	25	M	1.50	40.0	Good
1976	26	F	1.50	40.0	Good
1977	27	M	1.50	40.0	Good
1978	28	F	1.50	40.0	Good
1979	29	M	1.50	40.0	Good
1980	30	F	1.50	40.0	Good
1981	31	M	1.50	40.0	Good
1982	32	F	1.50	40.0	Good
1983	33	M	1.50	40.0	Good
1984	34	F	1.50	40.0	Good
1985	35	M	1.50	40.0	Good
1986	36	F	1.50	40.0	Good
1987	37	M	1.50	40.0	Good
1988	38	F	1.50	40.0	Good
1989	39	M	1.50	40.0	Good
1990	40	F	1.50	40.0	Good
1991	41	M	1.50	40.0	Good
1992	42	F	1.50	40.0	Good
1993	43	M	1.50	40.0	Good
1994	44	F	1.50	40.0	Good
1995	45	M	1.50	40.0	Good
1996	46	F	1.50	40.0	Good
1997	47	M	1.50	40.0	Good
1998	48	F	1.50	40.0	Good
1999	49	M	1.50	40.0	Good
2000	50	F	1.50	40.0	Good

20-27-67 - 203-98074 - Mr. & Mrs. Wenz 14 Nov 67
both doors closed

Used water from Can.!

Company Supervisor

16. *Staph.*