

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS

NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

#1E - 30-039-25200

#61 ~~30~~ - 30-039-06923

#265 - 30-039-24700

3276

Operator: UNOCAL - Bloomfield, NM Location: Unit G Sec. 30 Twp. 27N Rng. 6W

Name of Well/Wells or Pipeline Serviced: RINCON UNIT WELLS: 265 FC; 1E MV; 61 PC

Elevation: 6598 GR Completion Date: 10/18/95 Total Depth: 300' Land Type* F

Casing, Sizes, Types & Depths: NONE

If Casing is cemented, show amounts & types used: NONE

If Cement or Bentonite Plugs have been placed, show depths & amounts used: NONE

Depths & thickness of water zones with description of water when possible:

WET SANDSTONE AT 140'

Fresh, Clear, Salty, Sulfur, Etc.: NONE

Depths gas encountered: NONE

Type & amount of coke breeze used: 2500 LBS., SWB METALURGICAL PETROLEUM COKE

Depths anodes placed: 145' 155' 165' 175' 185' 195' 205' 215' 275' 285'

Depths vent pipes placed: 0' - 300', 1" PVC

Vent pipe perforations: 1/8" PERFORATIONS FROM 100' TO 300'

Remarks: SECOND GROUND BED INSTALLED ON THIS LOCATION.



If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analysis & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee

If Federal or Indian, add Lease Number.

RECEIVED
FEB - 5 1996

OIL CON. DIV.
DIST. 3

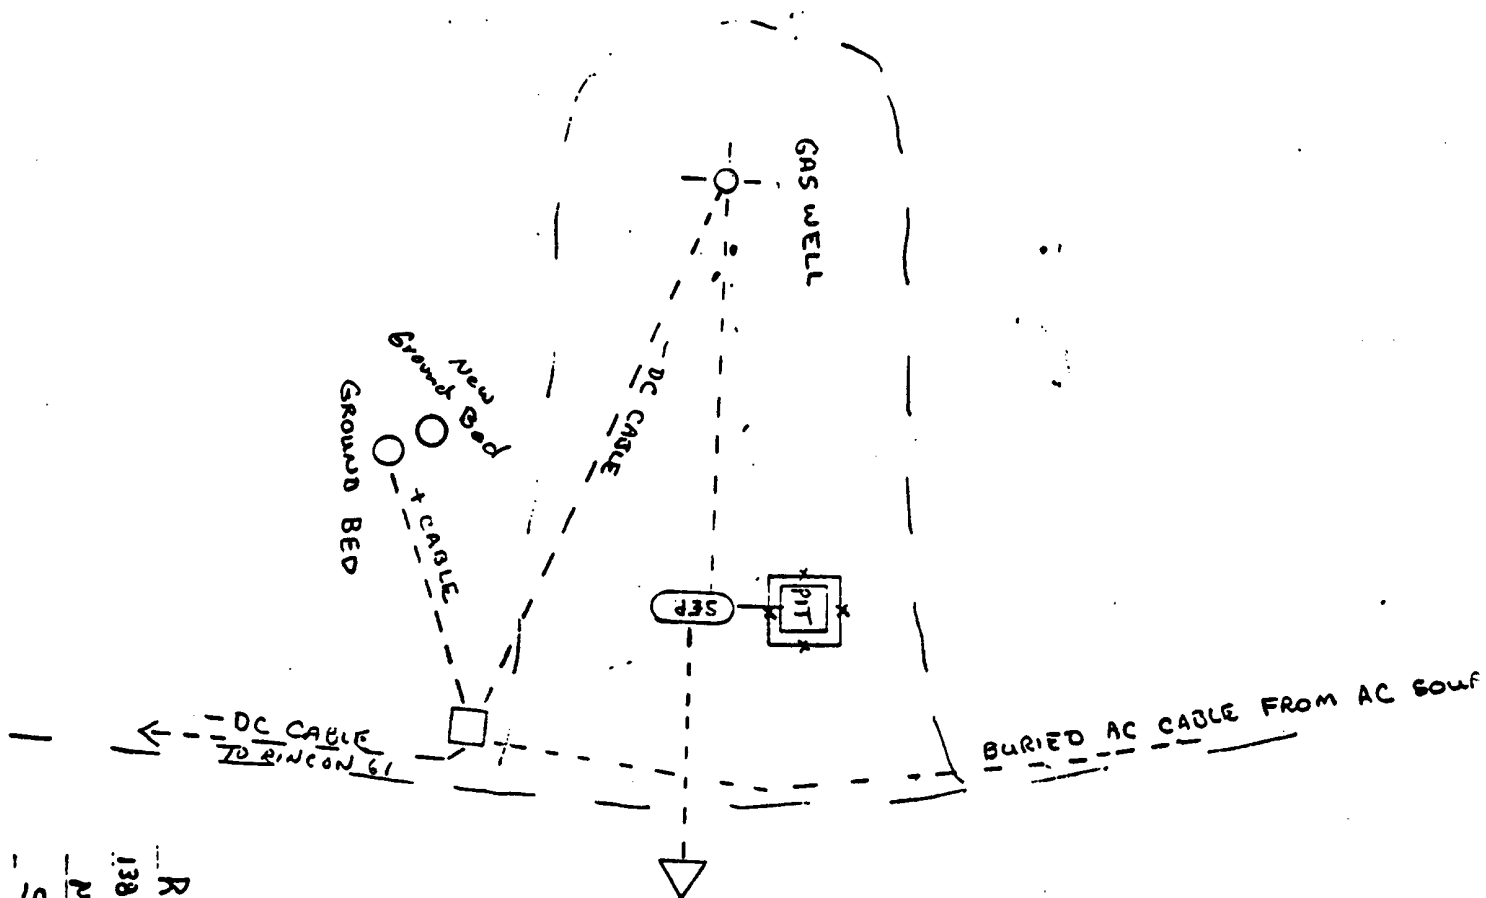

RINCON UNIT 265 FC

1380' IN 1812' FEL SEC 30 T27N R6W

METER NO. 92644

SF-079364

UNOCAL

COMPANY: Unocal DATE: 10-18-95
 WELL: Rincon Unit # 265, 61, 1E PIPELINE:
 LOCATION: 14 14 SEC. 28-27-7 STATE: N. M.
 GROUND BED: DEPTH: 300' DIAMETER: 6 3/4" BACKFILL: Metallinica ANODES TYPE: Durachlor

DEPTH FT.	DRILLERS LOG	ANODE LOG			ANODE DEPTH	REMARKS
		Logged	Coked	R		
20	Shale					
30	Shale					
40	Sand Stone					
50	Sand Stone					
60	Sand Stone					
70	Sand Stone					
80	Shale					
90	Shale					
100	Sand Stone					
110	Sand Stone					
120	Shale					
130	Shale					
140	Sand Stone	3	1.1		145'	Wet
150	Sand Stone	5	2.4		155'	
160	Shale	1.4	2.7		165'	
170	Shale	1.1	2.4		175'	
180	Shale	1.2	2.4		185'	
190	Sandy Shale	.9	2.2		195'	
200	Sandy Shale	.8	1.9		205'	
210	Sandy Shale	.6	1.2		215'	
220	Sand Stone	.3				
230	Sand Stone	.2				
240	Sand Stone	.2				
250	Sand Stone	.2				
260	Sand Stone	.2				
270	Sand Stone	3	1.4		275'	
280	Sandy Shale	.8	1.4		285'	
290	Sand Stone	.6				
300	Sand Stone	.5				
310						
320						
330						
340						
350						

NOTES:

POWER SOURCE: Battery VOLTS: 9.53
 INDICATE WATER ZONE DEPTHS Wet Sand Stone 140'
 CASING RUN: YES / ☒ NO TYPE: _____ DEPTH: _____ CEMENTED: YES / ☒ NO
 ISOLATION PLUGS SET: YES / ☒ NO IF SO, WHERE: _____
 TOTAL AMPS 6.2 RESISTANCE: 1.537

CON UNIT

