

290-30-039-24752
26-30-039-06802
200-30-039-20705-Plugged.

5605

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator UNOCAL Oil & Gas Division Location: Unit M Sec. 33 Twp 27 Rng 7

Name of Well/Wells or Pipeline Serviced Rincon Unit 290 FC, 200 CH & 26 PC

Elevation 6689' Completion Date 10/02/91 Total Depth 300' Land Type* F

Casing, Sizes, Types & Depths NONE

If Casing is cemented, show amounts & types used NONE

If Cement or Bentonite Plugs have been placed, show depths & amounts used NONE

Depths & thickness of water zones with description of water when possible: Fresh, Clear,
Salty, Sulphur, Etc. No Water Zones

Depths gas encountered: NONE


Type & amount of coke breeze used: Metallurgical Coke = 2000 lbs.

Depths anodes placed: 97, 103, 109, 115, 175, 181, 187, 193, 199 & 205

Depths vent pipes placed: 0 to 300'

Vent pipe perforations: From 80' to 300' depth = 1/8" 0 holes

Remarks: First ground bed installed at this location

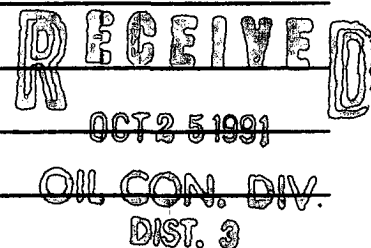

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

CITY:

WELL NAME:

Bineon

#290

LOCATION:

DATE:

10-2-91

TOTAL VOLUME:

12.64

TOTAL AREA:

8.9

OHMS RESISTANCE:

1.42

												ANODE HEADLINE			
DEEP	LOO	ANODE	DEEP	LOO	ANODE	DEEP	LOO	ANODE	DEEP	LOO	ANODE	NO.	DEPTH	NO	WITH
ANODE	ANODE	NO.	ANODE	ANODE	NO.	ANODE	ANODE	NO.	ANODE	ANODE	NO.			COKE	COKE
5			105	.9	5	305			545			1	205	.5	1.8
10			190	1.2	4	310			550			2	199	1.0	2.6
15			195	1.5	3	315			555			3	193	1.5	3.0
20			200	1.0	2	300			560			4	187	1.0	2.8
25			205	.6	1	305			565			5	181	.7	2.5
30			210	.2		390			570			6	175	.5	2.1
35			215	.1		395			575			7	175	.5	1.7
40			220	.1		400			580			8	169	1.5	4.1
45			225	.2		405			585			9	163	1.7	4.8
50			230	.1		410			590			10	97	1.5	1.6
55			235	.2		415			595						
60	.2		240	.2		420			600						
65	.1		245	.1		425			605						
70	.1		250	.2		430			610						
75	.3		255	.2		435			615						
80	.6		260	.2		440			620						
85	.9		265	.3		445			625						
90	1.2		270	.2		450			630						
95	1.5	10	275	.2		455			635						
100	1.7	9	280	.1		460			640						
105	1.5	8	285	.2		465			645						
110	1.0	7	290	.1		470			650						
115	.6		295	.1		475			655						
120	.5		300	.1		480			660						
125	.4		305			485			665						
130	.2		310			490			670						
135	.3		315			495			675						
140	.3		320			500			680						
145	.2		325			505			685						
150	.3		330			510			690						
155	.2		335			515			695						
160	.2		340			520			700						
165	.1		345			525			705						
170	.2		350			530			710						
175	.5		355			535			715						
180	.7	6	360			540			720						

REMARKS:

TIME		ACTIVITY
FROM	TO	
0	15	Sand/clay
15	40	Loose shale
40	50	Brown sand
50	80	Grey shale
50	100	grey sandstone w/ blue streaks
100	120	grey shale
120	190	hard grey (shiny) sandstone
190	200	grey hard shale
200	300	grey (hard) sandstone.

BIT RECORD		
SIZE & MAKE	SERIAL NO.	FOOTAGE
1 - 6	Special Blades	
CIRCULATION MATERIAL		
QUAN.	UNIT	MATERIAL

NO. OF LOADS OF WATER 1 SOURCE Longway Camp