

3271

**DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO**

API 30-039-06780 (32) (Submit 3 copies to OCD Aztec Office)

30-039-22646 (223A)

30-039-27007 (186)

Operator: UNOCAL - Bloomfield, NM Location: Unit P Sec. 33 Twp. 27N Rng. 7W

Name of Well/Wells or Pipeline Serviced: RINCON UNIT WELLS: 72 PC; 223A MV/CH; 186 DK

Elevation: 6743 DF Completion Date: 10/26/95 Total Depth: 300' Land Type* F

Casing, Sizes, Types & Depths: NONE

If Casing is cemented, show amounts & types used: NONE

If Cement or Bentonite Plugs have been placed, show depths & amounts used: NONE

Depths & thickness of water zones with description of water when possible: NONE

Fresh, Clear, Salty, Sulfur, Etc.: NONE

Depths gas encountered: NONE

Type & amount of coke breeze used: 2500 LBS., SWB METALURGICAL PETROLEUM COKE

Depths anodes placed: 140' 150' 160' 170' 180' 190' 200' 210' 230' 240' 275' 285'

Depths vent pipes placed: 0' - 300', 1" PVC


Vent pipe perforations: 1/8" PERFORATIONS FROM 100' TO 300'

Remarks: SECOND GROUND BED INSTALLED ON THIS LOCATION.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analysis & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee
If Federal or Indian, add Lease Number.

RECEIVED
FEB - 5 1996
OIL CON. DIV.
DIST. 2

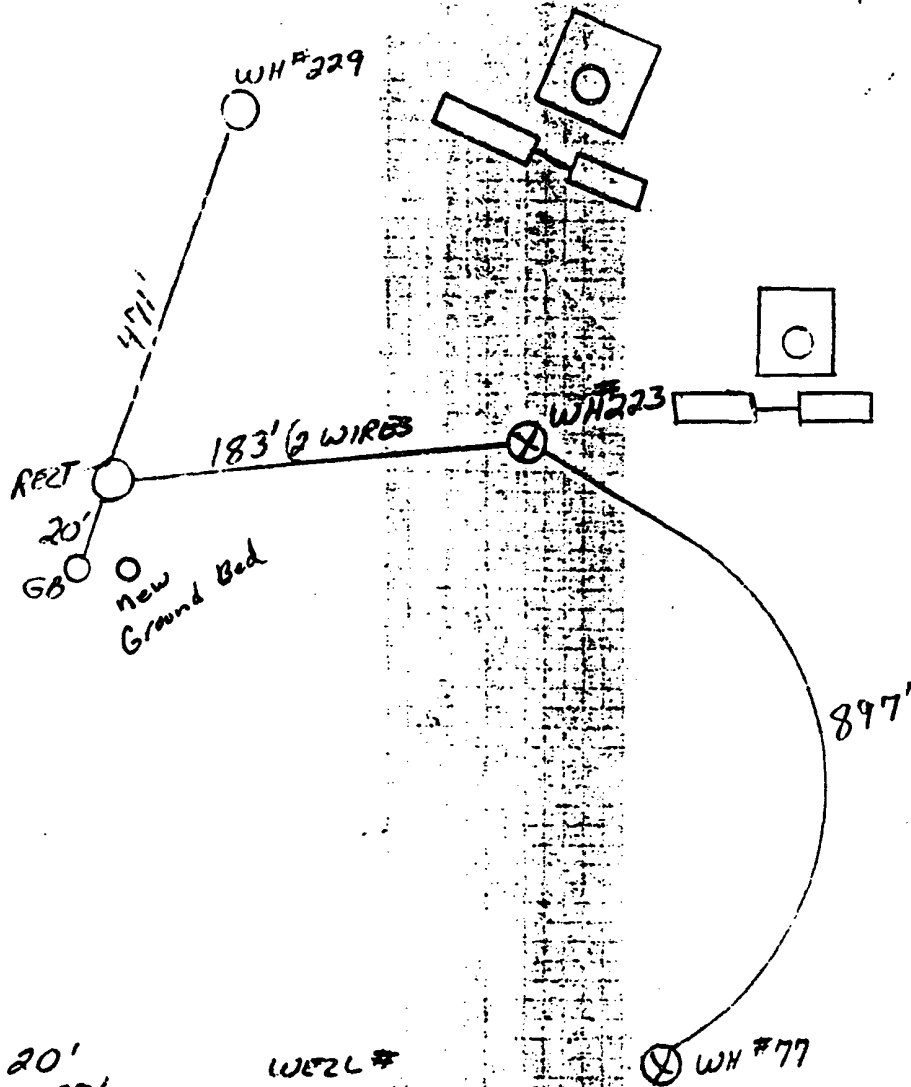

POS. 20'	WEZL #
NEG 897'	77
NEG 183' (2 WIRES)	223
NEG 471'	229



Cathodic Protection Services

A LUKENS COMPANY

RINCON #77
 RINCON #223
 RINCON #229

NO.	REVISION	DATE	DESIGNED BY SK SCALE NONE	CHK. APP. DATE 1-30-89	DWG. NO. REV. 00027-04
-----	----------	------	---------------------------------	------------------------------	---------------------------

COMPANY: Mineral DATE: 10-26-95
 WELL: Runon 72; 223A; 186 PIPELINE:
 LOCATION: 14 14 SEC. 33-27-7 STATE: NM
 GROUNDROD: DEPTH: 300 DIAMETER: 6 3/4" BACKFILL: Metallurgical ANODES TYPE: Duracell 51

DEPTH FT.	DRILLERS LOG	ANODE LOG			ANODE DEPTH	REMARKS
		Logged	Entered	R		
20	Sand					
30	Sand Stone					
40	Sand Stone					
50	Sand Stone					
60	Shale					
70	Shale					
80	Shale					
90	Sand Stone					
100	Sand Stone					
110	Sand Stone					
120	Sand Stone					
130	Sand Stone					
140	Sand Stone	3	9		140'	
150	Sandy Shale	4	13		150'	
160	Sandy Shale	6	14		160'	
170	Sandy Shale	6	16		170'	
180	Sandy Shale	7	17		180'	
190	Sandy Shale	8	17		190'	
200	Sandy Shale	9	18		200'	
210	Sandy Shale	5	14		210'	
220	Sand Stone	2				
230	Sand Stone	3	12		230'	
240	Sandy Shale	4	15		240'	
250	Sand Stone	2				
260	Sand Stone	3				
270	Sandy Shale	4	13		275'	
280	Sandy Shale	4	12		285'	
290	Sand Stone	2				
300	Sand Stone	2				
310						
320						
330						
340						
350						

NOTES:

POWER SOURCE: Battery VOLTS: 12.35
 INDICATE WATER ZONE DEPTHS Dry
 CASING RUN: YES / ☒ NO TYPE: _____ DEPTH: _____ CEMENTED: YES / ☒ NO
 ISOLATION PLUGS SET: YES / ☒ NO IF SO, WHERE: _____
 TOTAL AMPS: 4.6 RESISTANCE: 2.687

CON UNIT

