

3462

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

30-039-24249

Operator MERIDIAN OIL INC. Location: Unit B Sec. 20 Twp 30 Rng 6Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #460

cps 2052w

Elevation 6361' Completion Date 10/28/88 Total Depth 440' Land Type* N/ACasing, Sizes, Types & Depths N/AIf Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 140' NO SAMPLEDepths gas encountered: N/AType & amount of coke breeze used: N/ADepths anodes placed: 410', 400', 390', 380', 360', 205', 185', 165', 155'Depths vent pipes placed: 440'Vent pipe perforations: 300'Remarks: gb #1**RECEIVED**
MAY 31, 1991
OIL CON. DIV
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto) ☐Completion Date 10-28-88

CPS #		Well Name, Line or Plant:		Work Order #		Static:		Ins. Union Check	
2052N		San Juan 30-6#460		3196A				☐ Good ☒ Bad 1/2 2" union	
Location:		Anode Size:		Anode Type:		Size Bit:			
B 20-30-6		2" x 60"		Duriron		6 3/4			
Depth Drilled		Depth Logged		Drilling Rig Time		Total Lbs. Cable Used		Loss Circulation Mat'l Used	
440'		440'							
Anode Depth									
# 1	410	# 2	400	# 3	390	# 4	380	# 5	370
# 6	360	# 7	205	# 8	185	# 9	165	# 10	155
Anode Output (Amps)									
# 1	3.3	# 2	3.2	# 3	3.3	# 4	3.1	# 5	2.5
# 6	3.0	# 7	1.4	# 8	1.8	# 9	2.5	# 10	2.8
Anode Depth									
# 11		# 12		# 13		# 14		# 15	
# 16		# 17		# 18		# 19		# 20	
Anode Output (Amps)									
# 11		# 12		# 13		# 14		# 15	
# 16		# 17		# 18		# 19		# 20	
Total Circuit Resistance						No. 8 C.P. Cable Used		No. 2 C.P. Cable Used	
Volts 12.01		Amps 11.9		Ohms 1.0					

Remarks: Water at 140; no sample. Installed 440' of 1" PVC vent pipe. Bottom 300' perforated. Unable to run static test on well head due to bad 2" union.


Rectifier Size: 40 V 16 A 669.00
 Addn'l Depth
 Depth Credit: 60' @ 3.50 - 210.00
 Extra Cable: 150' @ .24 36.00
 Ditch & 1 Cable: 130' @ .70 91.00
 Ditch & 2 Cable: 0
 25' Meter Pole: 1 @ 307.00 307.00
 20' Meter Pole: 0
 10' Stub Pole: 0
 Junction Box: 1 @ 225.00 225.00

3192.00
259.60
3451.60 OK 42

* = bad union

All Construction Completed

Calvin Rodman
(Signature)

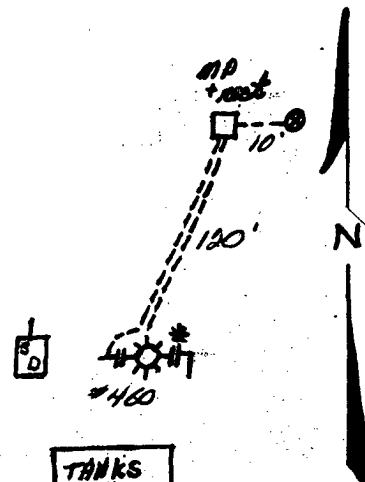

63el

THANKS