

3466

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

30-039-24292

Operator MERIDIAN OIL INC. Location: Unit J Sec. 15 Twp 30 Rng 7Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #465

cps 2050w

Elevation 6249' Completion Date 10/25/88 Total Depth 500' Land Type* N/ACasing, Sizes, Types & Depths N/AIf Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 80'Depths gas encountered: N/AType & amount of coke breeze used: N/ADepths anodes placed: 465', 350', 270', 260', 230', 220', 210', 175', 145', 135'Depths vent pipes placed: 490'Vent pipe perforations: 410'Remarks: gb #1

RECEIVED

MAY 31 1989

OIL CON. DIV.
DIST. 2

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

**WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG**

COMP 10-26-88
JS

Drilling Log (Attach Hereto) ☐Completion Date 10-25-88

CPS #	Well Name, Line or Plant:	Work Order #	State:	Ins. Union Check						
2050W	San Juan 30-6#465 #24	3335A	COON = 1.117V	☒ Good ☐ Bad						
Location: <u>15-30-7</u>	Anode Size: <u>2" x 60"</u>	Anode Type: <u>Duriron</u>	Size Bit: <u>6 3/4</u>							
Depth Drilled: <u>500'</u>	Depth Logged: <u>490'</u>	Drilling Rig Time	Total Lbs. Coke Used	Loss Circulation Mat'l Used						
Anode Depth	#1 <u>465</u>	#2 <u>350</u>	#3 <u>270</u>	#4 <u>260</u>	#5 <u>230</u>	#6 <u>228</u>	#7 <u>210</u>	#8 <u>175</u>	#9 <u>145</u>	#10 <u>135</u>
Anode Output (Amps)	#1 <u>3.5</u>	#2 <u>2.6</u>	#3 <u>3.2</u>	#4 <u>3.1</u>	#5 <u>2.5</u>	#6 <u>3.0</u>	#7 <u>3.0</u>	#8 <u>2.6</u>	#9 <u>4.0</u>	#10 <u>3.9</u>
Anode Depth	#11	#12	#13	#14	#15	#16	#17	#18	#19	#20
Anode Output (Amps)	#11	#12	#13	#14	#15	#16	#17	#18	#19	#20
Total Circuit Resistance	Volts <u>12.10</u>		Amps <u>16.0</u>		Ohms <u>.75</u>		No. 8 C.P. Cable Used		No. 2 C.P. Cable Used	


Remarks: Water at 80' sample taken. Installed 490' of
1" PVC vent pipe, bottom 410' perforated

Rectifier Size: 40 V 16 A Q.B. 4074.00
 Addn'l Depth: 40 669.00
 Depth Credit: 10' @ 3.50 35.00
 Extra Cable: 165' @ .24 39.60
 Ditch & 1 Cable: 135' @ .70 94.50
 Ditch & 2 Cable: 40
 25' Meter Pole: 40
 20' Meter Pole: 10 @ 297.00 297.00
 10' Stub Pole: 10 @ 225.00 225.00
 Junction Box: 10 @ 225.00 225.00

5364.10
tax 268.21
5632.31 8K DP

All Construction Completed

Cebu Radman
 (Signature)

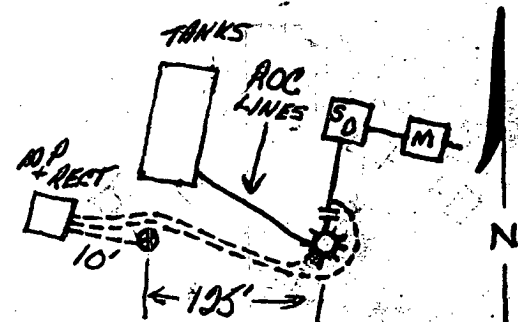

6-249