

3471

#102 → 30-045-26987
#10 → 30-045-24090

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit J Sec. 10 Twp 32 Rng 8

Name of Well/Wells or Pipeline Serviced REESE MESA #102, #10
cps 2045w

Elevation 7008' Completion Date 10/13/88 Total Depth 440' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 415', 405', 395', 385', 375', 365', 355', 345', 335', 320'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: gb #1

RECEIVED
MAY 31 1991
OIL CON. DIST.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

MERIDIAN OIL INC.
WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto) ☐

Comp 8014-88 98
Completion Date 10-13-88

CPS #		Well Name, Line or Plant:		Work Order #		State:		Ins. Union Check	
2045W		Pecora Mesa 102		3242A		600'NW = 687V		☒ Good ☐ Bad	
		# 10							
Location: <u>NE 10-22-8</u>		Anode Size: <u>2" x 10"</u>		Anode Type: <u>Division</u>		Size Out: <u>634</u>			
Depth Drilled: <u>440'</u>		Depth Logged: <u>440'</u>		Drilling Rig Time		Total Lbs. Cable Used		Low Circulation Mat'l Used	
Anode Depth		Anode Output (Amps)		Anode Depth		Anode Output (Amps)			
# 1	415	# 2	405	# 3	395	# 4	385	# 5	375
# 6	365	# 7	355	# 8	345	# 9	335	# 10	320
# 11		# 12		# 13		# 14		# 15	
# 16		# 17		# 18		# 19		# 20	
Total Circuit Resistance		Volts: <u>12.42</u>		Amps: <u>17.0</u>		Ohms: <u>.43</u>			
						No. 6 C.P. Cable Used		No. 2 C.P. Cable Used	

Remarks: _____

GB 4074.00

Rectifier Size: 40 V 16 A 669

Add'l Depth: 0

Depth Credit: 60' @ 3.50 = 210.00

Extra Cable: 445' @ .24 = 106.80

Ditch & 1 Cable: 855' @ .70 = 598.50

Ditch & 2 Cable: 0

25' Meter Pole: 0

20' Meter Pole: 1 @ 297.00 = 297.00


10' Stub Pole: 0

Junction Box: 1 @ 223.00 = 223.00

5460.30 ✓
+ 288.02
6048.32 ✓

All Construction Completed

Cabrera Redman
(Signature)

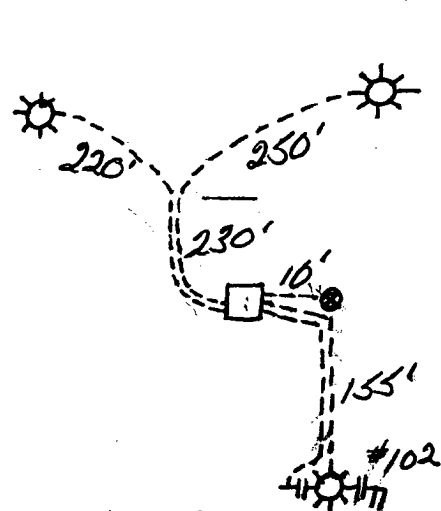

7008