

70 = 30-039-06870
110 = 30-039-82369

4845

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 25 Twp 27 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 28-6 UNIT #70, #110

cps 702w

Elevation 6584' Completion Date 11/17/65 Total Depth 330' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 4200 lbs.

Depths anodes placed: 250', 220', 214', 208', 202', 196', 190', 184'

Depths vent pipes placed: 184' OF 3/4" HOSE

Vent pipe perforations: N/A

Remarks: qb #1

RECEIVED
MAY 31 1991
OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

19 -


Date 11-17-65

Well Name <u>SJU. 28-6 #70 & #110</u>			CPS No. <u>702W</u>		
Location <u>SW 25-27-6</u>			Work Order No. <u>184-53149-50-20</u>		
Anode Hole Depth <u>330</u>	Total Drilling Rig Time <u>19 1/2 Hrs.</u>	Type & Size Bit Used <u>7 7/8-43831-330</u>		No. Sacks Mud Used <u>0</u>	
No. Sacks Lost Circulation Mat'l Used <u>1</u>	Anode Depth	#1 <u>190</u>	#2 <u>184</u>	#3 <u>214</u>	#4 <u>208</u>
		#1 <u>250</u>	#2 <u>220</u>	#3 <u>214</u>	#4 <u>208</u>
Total Lbs. Coke Used <u>4200</u>	Anode Output (Volts)	#1 <u>5.7</u>	#2 <u>5.4</u>	#3 <u>5.5</u>	#4 <u>5.4</u>
		#1 <u>3.4</u>	#2 <u>4.9</u>	#3 <u>5.5</u>	#4 <u>5.4</u>
Total Circuit Resistance Volts <u>11.7</u>	Amps <u>12.3</u>	Ohms <u>0.95</u>	No. Ft. Surface Cable Conduit <u>1110</u>		

Drilling Log (Attach Hereto). ☐

Remarks: Static R⁹/s 600' SW #110 = .76; 600' NW #70 = .76
Install Gopdall Rectifier 30V 20A (3 NEG) Ser # 65C6682
3/4" Plastic Hose to #8 Anode = 194' 4 lbs Chemical

GROUND BED LAYOUT SKETCH

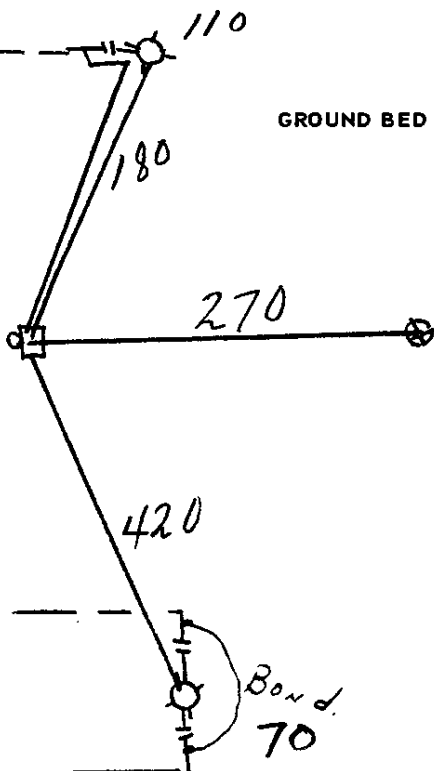

All Construction Completed

Sandels
(Signature)

2854 #8 wire

N

