

4 = 30-039-07302
113 = 30-039-07283
162 = 30-039-20492

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 26 Twp 28 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JAUN 28-6 UNIT #4, #113, #162

cps 723w

Elevation 6600' Completion Date 9/6/73 Total Depth 440' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 110'-120'

RECEIVED

MAY 31 1991

Depths gas encountered: N/A

OIL CON. DIV.

Type & amount of coke breeze used: 59 SACKS

\ DIST. 3

Depths anodes placed: 400', 355', 320', 280', 265', 225', 210', 190', 175', 165'

Depths vent pipes placed: N/A

Vent pipe perforations: 300'

Remarks: Cqb #2

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG


Completion Date **9-6-73**

Drilling Log (Attach Hereto). ☐

Well Name SJ. 286 #4 & #113		Location SW 26-28-6		CPS No. 723 W	
Type & Size Bit Used 6 3/4				Work Order No. 40040 & 20520	
Anode Hole Depth 440	Total Drilling Rig Time	Total Lbs. Coke Used 59	Lost Circulation Mat'l Used	No. Sacks Mud Used	
Anode Depth					
# 1 400	# 2 355	# 3 320	# 4 280	# 5 265	# 6 225
# 7 210	# 8 190	# 9 175	# 10 165		
Anode Output (Amps)					
# 1 2.8	# 2 3.7	# 3 3.0	# 4 3.6	# 5 3.6	# 6 3.4
# 7 2.9	# 8 3.1	# 9 3.1	# 10 4.4		
Anode Depth					
# 11 155	# 12 145	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Anode Output (Amps)					
# 11 3.9	# 12 3.9	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Total Circuit Resistance				No. 8 C.P. Cable Used	
Volts 12.4	Amps 13.5	Ohms 0.92			No. 2 C.P. Cable Used

Remarks: **Driller Said water at 110-120, water Standing at 330 at 9:30 A.M. Stop Drill at 9:00 A.M. Log 330 to 435, Fill with water, Log 110 to 428 Vent Perforated 300' Pump 59 Bags of Coke - Hole Full**

GROUND BED LAYOUT SKETCH

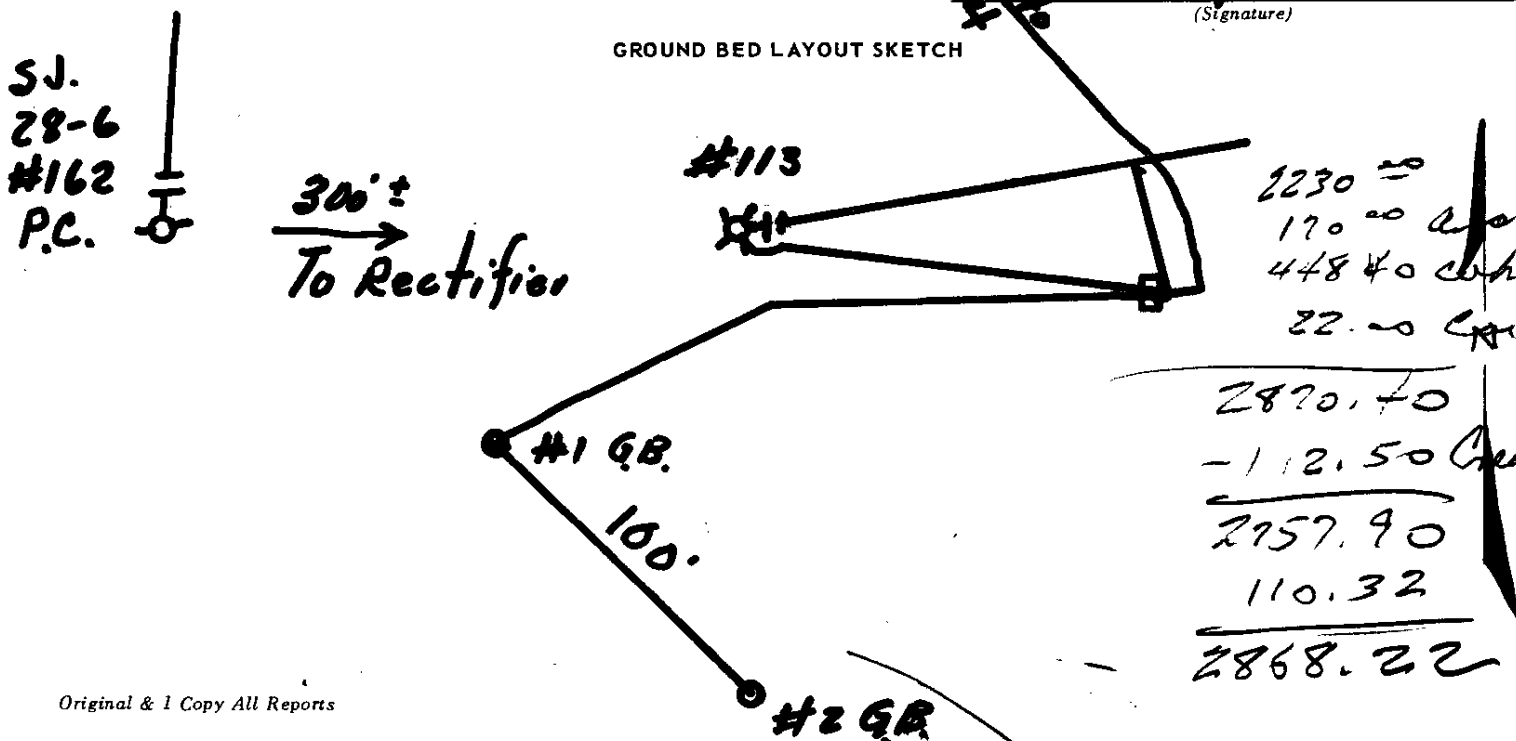

C.P.S. # 723-W

1230

[illegible]

SIGNED: Toolpusher

Frank Thompson

Company Supervisor

1000

