

4- 30-039-07302
113- 30-039-07283
162- 30-039-20492

4837

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 26 Twp 28 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 28-6 UNIT #4, #113, #162

cps 723w

Elevation 6600' Completion Date 5/9/66 Total Depth 240' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water where possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

RECEIVED
MAY 31 1991

Depths gas encountered: N/A

OIL CON. DIV
DIST. 2

Type & amount of coke breeze used: 4500 lbs.

Depths anodes placed: 189', 183', 177', 171', 165', 159', 153', 147', 141', 135'

Depths vent pipes placed: 189' OF 3/4" HOSE

Vent pipe perforations: 80'

Remarks: gb #1

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Date 5-9-66

Well Name SANDHOL 28-6#113 & #4			CPS No. 7230		
Location 8 Hr. on sheet = 22 Hrs Total (C.H.S.)			Work Order No. 184-20520-50 184-40040-50-		
Anode Hole Depth 240	Total Drilling Rig Time 14 HRS	Type & Size Bit Used #6 Reg - 95' #8 91348 (7 3/8) = 240'	No. Sacks Mud Used 4		
No. Sacks Lost Circulation Mat'l Used 0	Anode Depth				
	#1 189	#2 183	#3 177	#4 171	#5 165
Total lbs. Coke Used 1500	Anode Output (Volts)				
	#1 2.0	#2 1.8	#3 1.8	#4 1.8	#5 2.0
Total Circuit Resistance Volts	Amps	Ohms	No. Ft. Surface Cable Conduct		
		1.0 m	1970 0.4 Anodes		

Drilling Log (Attach Hereafter) <input type="checkbox"/>	Depth	7 153	8 147	9 141	10 135
	Output	7 3.0	8 3.8	9 3.6	10 4.9

600' STATE C/S 600' S.E. = 0.80

600' STATE C/S 600' West = 0.81

Hoodall Rect. 30-20 2 Neg Ser. # 65C6689

3/4" Hose to No. 1 Anode Perforated 80'

10 lbs Chemical to G.B.


NOTE Output in ohms instead of Amps

Hole Caved - Had to Move Rig Back over Hole -
See Drill log sheet #2

Flt. Return Meter
Test Point Band
All Construction Completed
Phelps
(Signature)

GROUND BED LAYOUT SKETCH

445'
1970'
2415' Total #8 wire

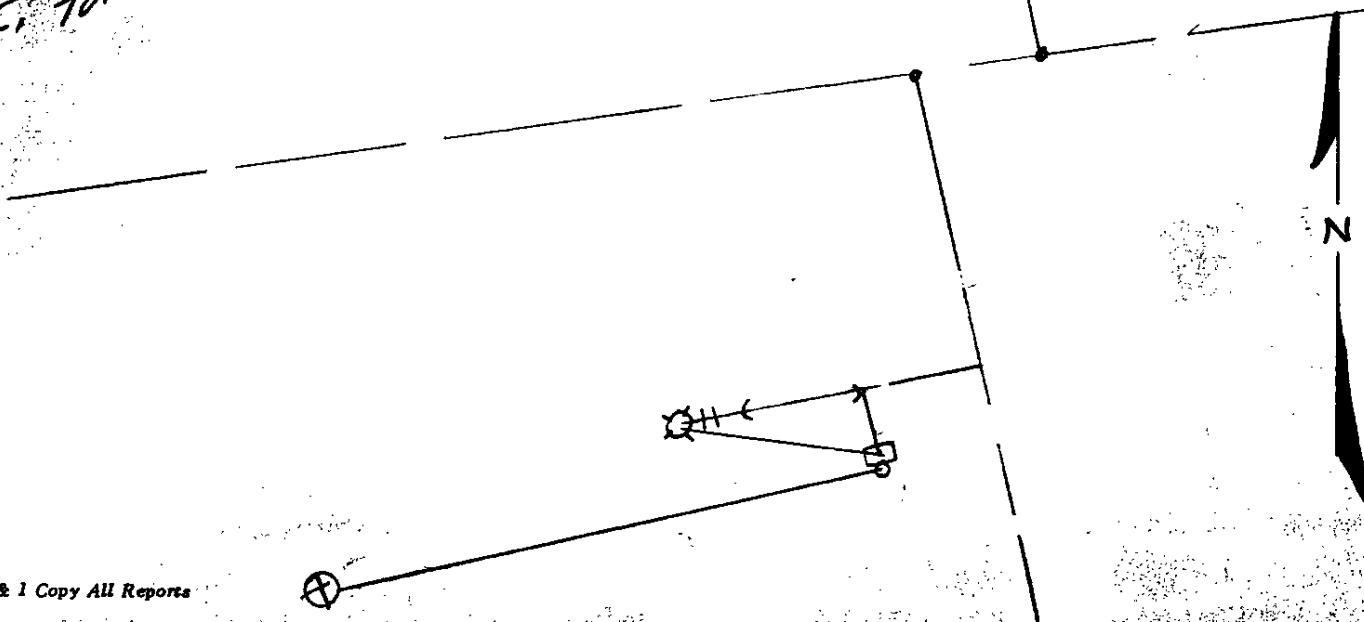

DAILY DRILLING REPORT

LEASE

WELL NO. 13 CONTRACTOR W

2011/11/20

RIG NO. **D-6**

REPORT NO.

DATED -

1961

MORNING

DAYLIGHT

EVENING

Driller						Total Men In Crew						Driller						Total Men In Crew					
FROM	TO	FORMATION	WT-BIT	R.P.M.		FROM	TO	FORMATION	WT-BIT	R.P.M.		FROM	TO	FORMATION	WT-BIT	R.P.M.		FROM	TO	FORMATION	WT-BIT	R.P.M.	
0	10	Chatt				191	205	Sandstone															
10	30	Shale				205	230	Shale															
30	130	Sandstone				230	240	Sandstone															
130	190	Shale																					

NO. DC			SIZE			LENG.					
BIT NO.			NO. DC			SIZE			LENG.		
SERIAL NO.			STANDS			SINGLES			DOWN ON KELLY		
MAKE			TOTAL DEPTH			MUD RECORD			MUD, ADDITIVES USED AND RECEIVED		
Time	Wt.	Vis.									

NO. DC			SIZE			LENG.					
BIT NO.			NO. DC			SIZE			LENG.		
SERIAL NO.			STANDS			SINGLES			DOWN ON KELLY		
MAKE			TOTAL DEPTH			MUD RECORD			MUD, ADDITIVES USED AND RECEIVED		
Time	Wt.	Vis.									

NO. DC			SIZE			LENG.					
BIT NO.			NO. DC			SIZE			LENG.		
SERIAL NO.			STANDS			SINGLES			DOWN ON KELLY		
MAKE			TOTAL DEPTH			MUD RECORD			MUD, ADDITIVES USED AND RECEIVED		
Time	Wt.	Vis.									

[illegible]

17 Feb 19: 17: 14 Feb.

REMARKS -

REMARKS:

REMARKS -

REMARKS		REMARKS		REMARKS
5-4-66 Left Port Bar at 11:30 PM and Drilled at C. Loc. Drilled with air to 85 ft with Water Supply to 120 ft 5-5-66 Left under 6:00 am and dug 7:30 Drilled from 120 ft to 90 ft finished At 6:25 330				

SIGNED: Toolpusher

Company Supervisor _____

Edw. Phelps

102
DAILY DRILLING REPORT

DATE 5-7-1964

DAYLIGHT

EVENING

[illegible][illegible]

REMARKS -

REMARKS -	REMARKS -	REMARKS -
5-9-66 - left yard at 600 a.m. rig 730 hole drilled up to 30' cleaned out		

It 240' much up thin down hole and block by 75 feet
left here at 300

Company Supervisor

Donald