


30-039-07718

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 35 Twp 30 Rng 7
Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #100
cps 131w
Elevation 6845' Completion Date 8/22/74 Total Depth 460' Land Type* N/A
Casing, Sizes, Types & Depths N/A
If Casing is cemented, show amounts & types used N/A
If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A
Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A
Depths gas encountered: N/A
Type & amount of coke breeze used: N/A
Depths anodes placed: 420', 410', 400', 390', 380', 370', 360', 350', 320', 310'
Depths vent pipes placed: N/A
Vent pipe perforations: 268'
Remarks: qb #2

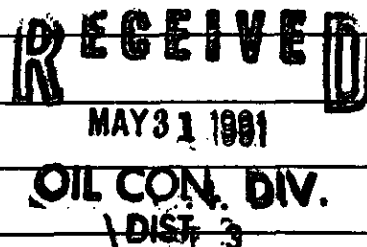

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

logged

Drilling Log (Attach Hereto). ☐


Completion Date **8-22-74**

Well Name SJ 30-6 #100		Location SW 35-30-7		CPS No. 131 W	
Type & Size Bit Used 6 3/4				Work Order No. 52633	
Anode Hole Depth 460	Total Drilling Rig Time		Total Lbs. Coke Used	Lost Circulation Mat'l Used	No. Sacks Mud Used
Anode Depth	# 1 420	# 2 410	# 3 400	# 4 390	# 5 380
Anode Output (Amps)	# 1 3.2	# 2 2.9	# 3 3.2	# 4 3.6	# 5 3.2
Anode Depth	# 6 370	# 7 360	# 8 350	# 9 320	# 10 310
Anode Output (Amps)	# 6 3.8	# 7 3.1	# 8 3.5	# 9 3.2	# 10 2.8
Anode Depth	# 11	# 12	# 13	# 14	# 15
Anode Output (Amps)	# 11	# 12	# 13	# 14	# 15
Total Circuit Resistance	Volts 11.6		Amps 15.5	Ohms .76	No. 8 C.P. Cable Used 40
				No. 2 C.P. Cable Used	

Remarks: **Driller Said Water at 160 & 300 to 320**
Got Log Reading at 330 after 1 Hour. Fill with water to 300
Vent Perf 268'
Pump to 10' of Surface-
Complete By Slurry

\$ 3,409.00
16.00 Cable
\$ 3,425.00
-110.00 Depth Credit
\$ 3,315.00
132.60 TAX
\$ 3,447.60

GROUND BED LAYOUT SKETCH

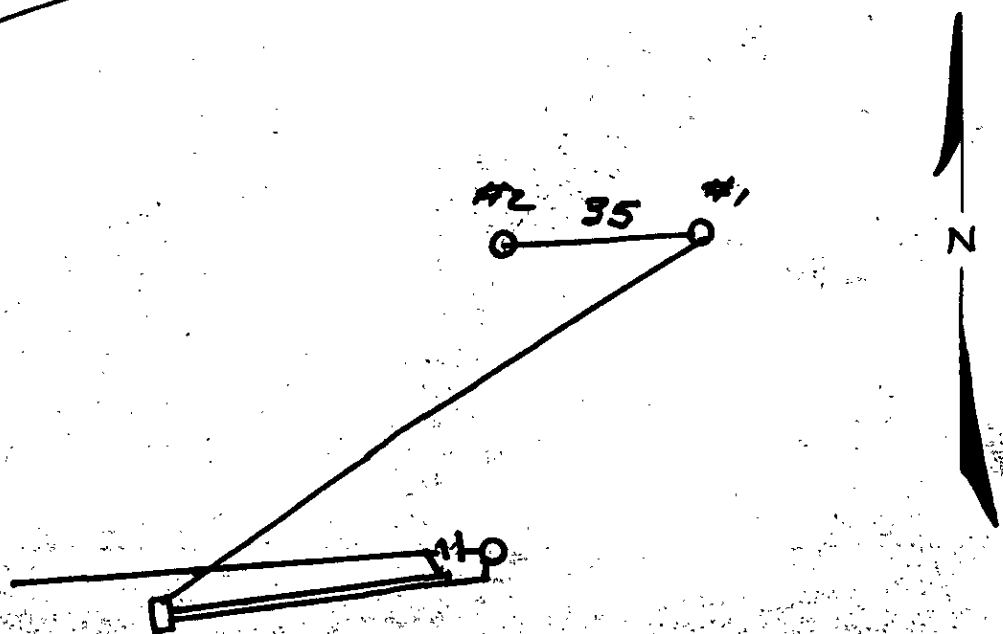

All Construction Completed
Daniel
 (Signature)

STORM WATER WELL DRILLING INC.

GENERAL OFFICE
14991 W. 44TH AVENUE
BAILEY OFFICE
CALL 1-832-4821

Date 8-22-74

Owner C-P-S 131 W

Location _____
City SARMINGTON State N.M. County _____

[illegible]

Total Hours _____

Equipment Down Time _____

Hours Drilling: 1200

Driller Art Shadwell

Helper _____

Helper _____

C.P.S. Time _____

S.W.W.D.I. Time _____

Total Footage _____

Approval of
C.P.S. Engineer: _____

1314 X = ?

Driller Said wt/at.
160 & 300 to 320'

Vent Perf 268'

	Log	wt.	Core
1	420	1.7 2.2	32
2	410	1.4 1.9	29
3	400	1.6 2.2	32
4	390	1.7 1.7	30
5	380	1.6 2.0	32
6	370	2.0 2.4	38
7	360	1.7 1.8	31
8	350	1.6 2.1	35
9	320	1.4 2.0	32
10	310	1.4 1.5	28

$$15 \overline{) 11.60} \quad 76$$

$$10 \overline{) 8.5} \quad 15.5A = 7.6$$

$$9.50$$

$$9.30$$

160		340	1.6	
70		30	1.6	
			2.2	
60		60	1.7	
			1.7	
90		70	2.0	
			1.9	
200		6	1.6	
			1.4	
16		96	1.7	
			1.8	
20		400	1.6	
			1.4	
30		10	1.4	
			1.6	
46		20	1.7	
			1.5	
56		30	1.4	
			1.4	
60		40	1.4	
			1.3	
76		TD 56	1.3	
80		60		
96				
300	1.0			
	1.0			
10	1.4			
	1.6			
20	1.6			
	1.3			
30	1.9			
	1.7			