

30-039-82242

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SE Sec. 9 Twp 28 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 28-6 UNIT #120

cps 850w

Elevation 6485' Completion Date 6/10/68 Total Depth 400' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/a

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 150'

Depths gas encountered: N/A


Type & amount of coke breeze used: 8400 lbs.

Depths anodes placed: 371', 365', 359', 353', 343', 337', 331', 310'

Depths vent pipes placed: 371' OF 3/4" HOSE

Vent pipe perforations: 275'

Remarks: gb #1

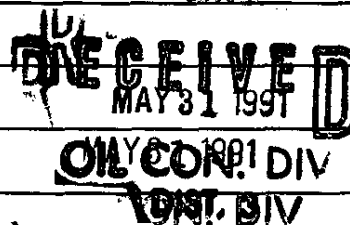

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Date 6-10-68

430 #70 = 40'
4 1/2 #1210 = 70
43 1/4 #71 = 50

Well Name <u>San Juan 28-6 #120</u>			CPS No. <u>850W</u>		
Location <u>SE 9-28-6</u>			Work Order No. <u>184-20572-50-20</u>		
Anode Hole Depth <u>400</u>	Total Drilling Rig Time <u>40 1/2 Hrs</u>	Type & Size Bit Used <u>55710 = 120</u> <u>7 1/8, 71917 = 200 38513 = 80</u>		No. Sacks Mud Used <u>0</u>	
No. Sacks Lost Circulation Mat'l Used <u>0</u>	Anode Depth				
	#1 <u>371</u>	#2 <u>365</u>	#3 <u>359</u>	#4 <u>353</u>	#5 <u>343</u> #6 <u>337</u>
Total Lbs. Coke Used <u>8400</u>	Anode Output (Volts)				
	#1 <u>4.0</u>	#2 <u>4.2</u>	#3 <u>4.4</u>	#4 <u>4.5</u>	#5 <u>4.8</u> #6 <u>4.5</u>
Total Circuit Resistance Volts <u>11.7</u>	Amps <u>12.6</u>	Ohms <u>0.92</u>	No. Ft. Surface Cable Conduit <u>2929 on Anodes 519 surface = 3448</u>		

Drilling Log (Attach Hereto). ☐

Remarks: Static 600' E = 0.75

7 <u>331</u>	8 <u>310</u>
7 <u>4.5</u>	8 <u>4.0</u>

3/4" Hose to No.1 Anode - Perforated 275'
Circulate 20 lbs Borafos thru Hole -

GoodAll 28-6 Rectifier Modified - 8 1/2 220 VAC Transformer
P.E.M. Stack C-133-5-281-53K

All Construction Completed

Aurela
(Signature)

GROUND BED LAYOUT SKETCH

