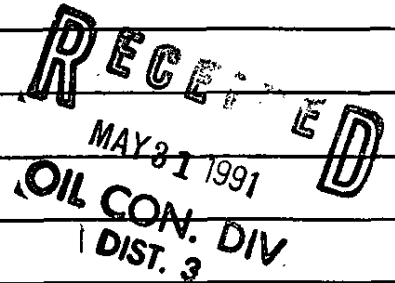


4390

30-045-60190

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 6 Twp 30 Rng 8Name of Well/Wells or Pipeline Serviced HOWELL G #2cps 13wElevation 6034' Completion Date 11/4/61 Total Depth 122' Land Type* N/ACasing, Sizes, Types & Depths N/AIf Casing is cemented, show amounts & types used N/AIf Cement or Bentonite Plugs have been placed, show depths & amounts used
N/ADepths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/ADepths gas encountered: N/AType & amount of coke breeze used: 1020'Depths anodes placed: 108', 102', 96', 90', 84'Depths vent pipes placed: N/AVent pipe perforations: N/ARemarks: qb #1

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

SAN JUAN DIVISION
WELL CASING CATHODIC PROTECTION
DAILY CONSTRUCTION
PROGRESS REPORT

DATE Nov 4, 1961

WELL NAME - Howell 2-B WORK ORDER NO. 184-53212-50-20

NUMBER AND DEPTH OF HOLES: #1 122', #2 , #3 , #4 , #5 .

DEPTH OF EACH ANODE: #1 108', #2 102', #3 96', #4 90, #5 84', #6 , #7
#8 , #9 , #10 .

ANODE RESISTANCES: #1 2.6, #2 2.2, #3 1.8, #4 2.5, #5 2.5, #6 , #7
#8 , #9 , #10 .

TOTAL CIRCUIT RESISTANCE: 1.1 OHMS.

DRILLING LOG: (ATTACH HERETO)

AMOUNT OF COKE BREEZE PLACED IN EACH HOLE: #1 ^{1020#}15 Bags, #2 , #3
#4 , #5 .

ANY DIFFICULTIES ENCOUNTERED IN DRILLING:

ROCKS-

LOST CIRCULATION-

CASING INSTALLED-

DATE ALL CONSTRUCTION COMPLETED .

REMARKS: Upper strata of shale logged .5 m higher
than lower strata

Coke 5.3 lbs/ft. ? Total Depth ?

Paper Bag of Coke.
67#

E. R. Paulk
SIGNATURE OF INSPECTOR

DAILY DRILLING REPORT

Company Supervisor

SIGNED: Toolpusher