

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised May 08, 2003

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-045-29965
1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other		5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
2. Name of Operator Burlington Resources Oil & Gas Company LP		6. State Oil & Gas Lease No. K-5808-NM
3. Address of Operator PO Box 4289, Farmington, NM 87499		7. Lease Name or Unit Agreement Name Albino Canyon
4. Well Location Unit Letter <u>A</u> : <u>1080</u> feet from the <u>North</u> line and <u>770</u> feet from the <u>East</u> line Section <u>36</u> Township <u>32N</u> Range <u>8W</u> NMPM San Juan County		8. Well Number 3
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 6608' GR		9. OGRID Number 14538
		10. Pool name or Wildcat Albino Pictured Cliffs

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

It is intended to plug and abandon the subject well according to the attached procedure and wellbore diagrams.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tammy Wimsatt TITLE Regulatory Specialist DATE 9/8/2003

Type or print name Tammy Wimsatt

Telephone No. (505) 326-9700

(This space for State use)

APPROVED BY Charles H.

DEPUTY OIL & GAS INSPECTOR, DIST. 9
TITLE _____

SEP - 9 2003
DATE _____

Conditions of approval, if any:

Albino Canyon #3 – Pictured Cliffs AIN: 82102101
PLUG AND ABANDONMENT PROCEDURE – 8/19/03

1080' FNL & 770' FEL
NE, Section 36, T32N, R08W
Latitude: N36° 56.49', Longitude: W107° 37.2'

Note: All cement volumes use 100% excess outside pipe and 50' excess inside pipe. The stabilizing wellbore fluid will be 8.3 ppg, sufficient to balance all exposed formation pressures. All cement will be ASTM Type II, mixed at 15.6 ppg with a 1.18 cf/sx yield.

1. Install and test location rig anchors. Prepare blow pit. Comply with all NMOCD, BLM, and Burlington safety regulations. MOL and RU daylight pulling unit. Conduct safety meeting for all personnel on location. NU relief line and blow down well; kill with water as necessary. ND wellhead and NU BOP. Test BOP.
2. TOH with 115 joints 2-3/8" tubing, total 3596'. Visually inspect and if necessary use a workstring. Round-trip 4-1/2" gauge ring or casing scraper to 3461'.
3. **Plug #1 (Pictured Cliffs Perforations and Fruitland top, 3461' – 3056')**: TIH and set a 4-1/2" cement retainer at 3461'. Pressure test tubing to 1000#. Sting out of retainer. Load casing with water and circulate well clean. Pressure test casing to 500#. If casing does not test, then spot or tag subsequent plugs as necessary. Mix 35 sxs cement and spot a balanced plug inside casing above the CR up to 3056' to isolate the Pictured Cliffs perforations and to cover the Fruitland top. PUH to 2460'.
4. **Plug #2 (Kirtland and Ojo Alamo tops, 2460' – 2270')**: Mix 18 sxs cement and spot a balanced plug inside casing to cover the Kirtland and Ojo Alamo tops. PUH to 1370'.
5. **Plug #3 (Nacimiento top, 1370' – 1270')**: Mix 12 sxs cement and spot a balanced plug inside casing to cover the Nacimiento top. PUH to 395'.
6. **Plug #4 (8-5/8" casing shoe, 395' - Surface)**: Attempt to pressure test the bradenhead annulus to 300#. If it tests, then with the tubing at 395', establish circulation out casing valve with water. Mix approximately 35 sxs cement and fill the inside of the 4-1/2" casing to surface, circulate good cement out casing valve. TOH and LD tubing. Shut well in and WOC. If the BH annulus does not test, TOH and LD tubing. Perforate at appropriate interval and cement to surface cover the surface casing shoe and filling the annulus, circulate good cement out bradenhead.
7. ND BOP and cut off casing below surface. Install P&A marker with cement to comply with regulations. RD, move off location, cut off anchors and restore location.

Recommended:

M Wardinsky 8/28/03
Operations Engineer

Approved:

mc 9-5-03
Drilling Manager

Mike Wardinsky
Office: 599-4045
Cell: 320-5113

Sundry Required: **YES** NO

Approved:

Tammie Winters
Regulatory

Lease Operator: Gio Billington
Specialist: Les Hepner
Foreman: Hans Dube

Cell: 320-7071
Cell: 320-2531
Cell: 320-4925

Pager: 326-8925
Pager: 327-8619
Pager: 949-2664

Albino Canyon #3

Proposed P&A

AIN #82102101

Albino Pictured Cliffs Ext.

NE, Section 36, T-32-N, R-8-W, San Juan County, NM

Long: N: 36° 56.49 / Lat: W: 107° 37.2 , API #30-045-29965

Today's Date: 8/14/03

Spud: 4/15/00

Completed: 8/10/00

Elevation: 6608' GL
6620' KB

Nacimiento @ 1320' (est)

Ojo Alamo @ 2320'


Kirtland @ 2410'

Fruitland @ 3106'

Pictured Cliffs @ 3508'

12-1/4" hole

7-7/8" Hole

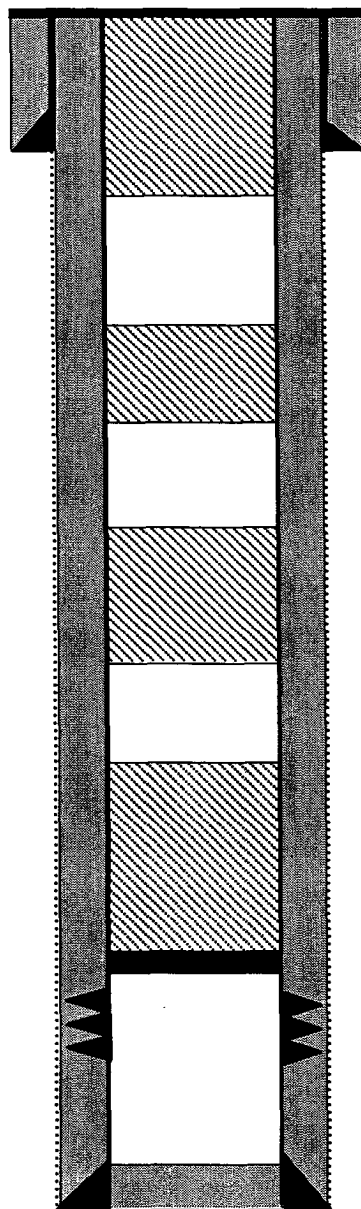

Circulated Cement to Surface

8-5/8" 24# Casing set @ 345'
Cement with 350 sxs (Circulated to Surface)

Plug #4: 395' - Surface
Cement with 35 sxs

Plug #3: 1370' - 1270'
Cement with 12 sxs

Plug #2: 2460' - 2270'
Cement with 18 sxs

Plug #1: 3461' - 3056'
Cement with 35 sxs

Set CR @ 3461'

Pictured Cliffs Perforations:
3511' - 3587'

4-1/2" 10.5# J-55 Casing set @ 3826'
Cement with 632 sxs (1089 cf)
Circulate 5 bbls of cement to surface

TD 3835'
PBTD 3783'

Albino Canyon #3

Current

AIN #82102101

Albino Pictured Cliffs Ext.

NE, Section 36, T-32-N, R-8-W, San Juan County, NM

Long: N: 36° 56.49 / Lat: W: 107° 37.2 , API #30-045-29965

Today's Date: 8/14/03

Spud: 4/15/00

Completed: 8/10/00

Elevation: 6608' GL
6620' KB

Nacimiento @ 1320' (est)

Ojo Alamo @ 2320'

Kirtland @ 2410'

Fruitland @ 3106'

Pictured Cliffs @ 3508'

