

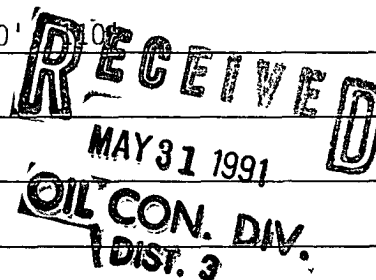
753

2- 30-045-08464
2- 30-045-08511
6- 30-045-20861

E

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)Operator MERIDIAN OIL Location: Unit SW Sec. 12 Twp 29 Rng 10Name of Well/Wells or Pipeline Serviced HOUCK #2, LACKEY A #2, #6

cps 1028w

Elevation 5780' Completion Date 6/66 Total Depth 155' Land Type* N/ACasing, Sizes, Types & Depths N/AIf Casing is cemented, show amounts & types used N/AIf Cement or Bentonite Plugs have been placed, show depths & amounts used
N/ADepths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/ADepths gas encountered: N/AType & amount of coke breeze used: 2300 lbs.Depths anodes placed: 150', 140', 135', 125', 120'Depths vent pipes placed: N/AVent pipe perforations: N/ARemarks: gb #1

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

Lackey A #2, #6

WELL TYPE GROUNDED VIA

1028W

DATA SHEET NO. 3

COMPANY LA PLATA GATHERING JOB No. 3271 DATE: JUNE 1966

WELL: HOUCK # 2-12 PIPELINE:

LOCATION: SEC. 12 TWP. 29 RGE. 10 CO. SAN JUAN STATE N. MEX.

ELEV. _____ FT: ROTARY 155 FT: CABLE TOOL _____ FT: CASING _____ FT.

GROUNDBED: DEPTH 155 FT. DIA. 6 3/4 IN. GAS 2300 LBS. ANODES 6-1 1/2" X 60" 0-51

DEPTH, FT.	DRILLER'S LOG	DRILL PIPE TO STRUCTURE			EXPLORING ANODE TO STRUCTURE			DEPTH, TOP OF ANODES
		E	I	R	E	I	R	
					12.0			
10						1.2		
20						0.3		
30						0.3		
40						0.4		
50						1.0		
60		12.0	13.0			1.3		
70			19.0			1.3		
80			24.0			0.2		
90						1.4		
100			27.0			2.0		
110						1.4		110
120			30.0			2.0		120
130								125
140			32.0			1.4		135
150						2.0		140
160			34.0			1.4		150
170		12.0	35.0		12.0	1.4		
180								
190								
200								
210								
220								
230								
240								
250								
260								
270								
280								
290								
300								

2300 # cde

96 #1

57.80

NOSED RESISTANCE: (1) VOLTS 9 + AMPS 9.5 = 0.95 OHMS

(2) VIBROGROUND 1.0 OHMS



cathodic protection service

HOUSTON TEXAS