

E

732 76-30-039-07352
107-30-039-20385

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 23 Twp 28 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 28-6 UNIT #107, #76

cps 1041w

Elevation 6566' Completion Date 10/30/75 Total Depth 550' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 125'

Depths gas encountered: N/A


Type & amount of coke breeze used: 6000 lbs.

Depths anodes placed: 490', 475', 465', 455', 445', 435', 420', 405', 390', 375', 360', 345'

Depths vent pipes placed: N/A

Vent pipe perforations: 375'

Remarks: gb #1

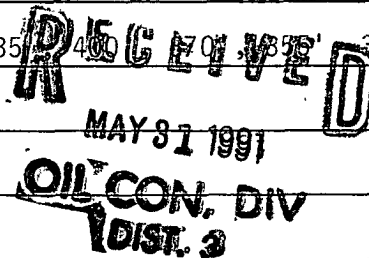

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING.
CATHODIC PROTECTION CONSTRUCTION REPORT
DATE LOG

Drilling Log (Attach Hereto). ☐

Completion Date **10-30-75**


Well Name SW 23-28N-6W 107 SW 23-28N-6W 76		Location SW 23-28N-6W		CPS No. 1041W	
Type & Size Bit Used 6 3/4"				Work Order No. 54889.19-50-20 53368.19-50-20	
Anode Hole Depth 550	Total Drilling Rig Time	Total Lbs. Coke Used 6,000	Lost Circulation Mat'l Used	No. Sacks Mud Used	
Anode Depth					
# 1 490	# 2 475	# 3 465	# 4 455	# 5 445	# 6 435
# 7 400	# 8 370	# 9 355	# 10 345		
Anode Output (Amps)					
# 1 2.2	# 2 1.0	# 3 2.1	# 4 1.9	# 5 2.2	# 6 1.8
# 7 1.8	# 8 1.8	# 9 2.1	# 10 2.5		
Anode Depth					
# 11	# 12	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Anode Output (Amps)					
# 11	# 12	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Total Circuit Resistance			No. 8 C.P. Cable Used		
Volts 10.7	Amps 9.0	Ohms 1.20	5235		
			No. 2 C.P. Cable Used		

Remarks: **Drill with Air. Driller said water AT 125'**
Water standing AT 270' After 1 hour stop
drilling. Vent Hose Perforated 375'
Logging Anode stopped AT 513'

All Construction Completed

Edward R. Parlow
(Signature)

GROUND BED LAYOUT SKETCH

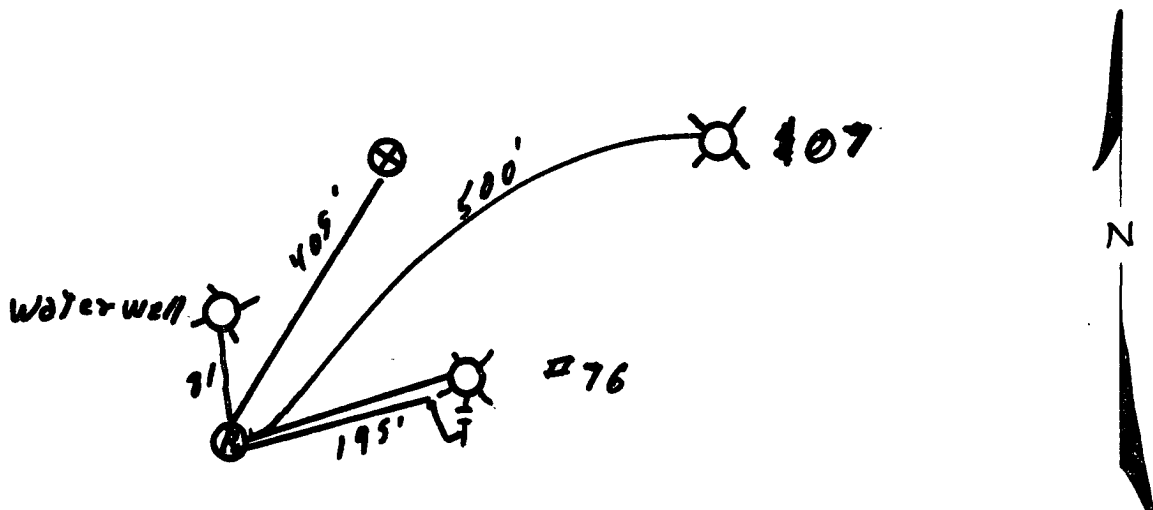

MORGAN DRILLING COMPANY

P.O. Box 326 • Broken Bow, Oklahoma 74728

Ph. Office 405/584-6000
Mobile 584-6860
Night 420-3248

DATE _____

18-1-54839. Ky-50-220
Work Order No. 18-1-54839 19-50-220
SAN JUAN 28-6 #107
SAN JUAN 28-6 #76

CUSTOMER EL PASO GAS CO		SERVICE ADDRESS BOX 990		CITY FARMINGTON NM 87401	
TEL. NO. 505 1041114	REQ. NO.	SERVICEMAN MORGAN DRILLING	VEHICLE NO. T4	DATE COMPLETED	

LITHOLOGIC LOG

[illegible]

INSTRUCTIONS:

SERVICE PERFORMED:	
TOTAL DEPTH	TOTAL 513
RIG TIME	
WATER TRUCK	

DRILLERS CERTIFICATION

This well was drilled under my supervision and the report is true to the best of my knowledge.

Name Robert F. Kennedy

Address

Well driller's license number

Signed

Date _____

Customer's Signature

By

