

1 = 30-045-09795

4945

4 = 30-045-20473

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 5 Twp 30 Rng 9

Name of Well/Wells or Pipeline Serviced WOODRIVER #1, WOODRIVER #4,

WOODRIVER #1R cps 43w

Elevation 6353 Completion Date 6/28/74 Total Depth 340' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 50' AND INCREASING TO TD.

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 320', 310', 300', 290', 270', 260', 250', 240', 230', 190'

Depths vent pipes placed: N/A

Vent pipe perforations: 200'

Remarks: qb #2

RECEIVED

MAY 31 1991

OIL CON. DIV
DIST.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto). ☐

Completion Date **6-28-74**


Well Name Woodriver #1 & 4		Location SW5-30-9		CPS No. 43W	
Type & Size Bit Used				Work Order No. 52443 & 54669	
Anode Hole Depth 340'	Total Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used	No. Sacks Mud Used	
Anode Depth					
# 1 320	# 2 310	# 3 300	# 4 290	# 5 270	# 6 260
# 7 250	# 8 240	# 9 230	# 10 190		
Anode Output (Amps)					
# 1 3.6	# 2 4.0	# 3 4.5	# 4 3.2	# 5 4.2	# 6 3.4
# 7 3.6	# 8 4.0	# 9 3.9	# 10 3.9		
Anode Depth					
# 11	# 12	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Anode Output (Amps)					
# 11	# 12	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Total Circuit Resistance		No. 8 C.P. Cable Used		No. 2 C.P. Cable Used	
Volts 11.5	Amps 15.0	Ohms 0.76	103		

Remarks: **Driller Said Water at 50' & increasing to T.D.**
Start injection at 50 - Water level at 180 after 30 Min.
Vent Perforated 200'
Pump to Est. 50' of Surface - Complete By Slurry

All Construction Completed

Paulk-Darrels
(Signature)

GROUND BED LAYOUT SKETCH

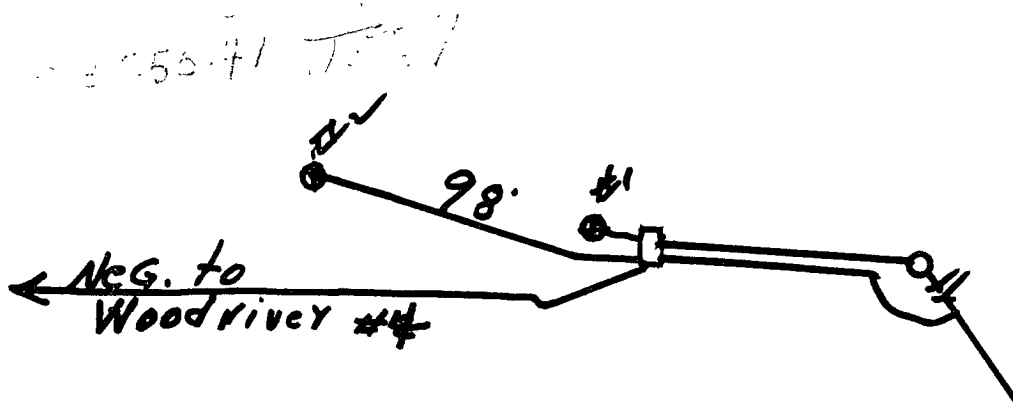

STORM WATER WELL DRILLING INC.

DIAMOND CORE DRILLING
DIAMOND DRILLING EQUIPMENT
GROUTING
FOUNDATION TESTING
MINING
QUARRYING
SHAFT SINKING
WATER WELL DRILLING

CONTRACTORS
14991 W. 44TH AVENUE
GOLDEN, COLORADO 80401
PHONE (303) 278-9505

GENERAL OFFICE
14991 W. 44TH AVENUE
BAILEY OFFICE
CALL 1-838-4821

Drill GD 15 W

Date 6-28-74

Owner C.P.S. 4321

Location _____
City Farmington State N.M. County _____

[illegible]

Total Hours _____

Equipment Down Time _____

Hours Drilling _____

Driller Art Shubnell

Helper _____

Helper _____

C.P.S. Time _____

S.W.W.D.I. Time _____

Total Footage _____

Approval of
C.P.S. Engineer _____

