

908

E

35 - 30-039- 07328

165 - 30-039- 20478

407 - 30-039- 24658

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO


(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 30 Twp 28 Rng 6Name of Well/Wells or Pipeline Serviced SAN JUAN 28-6 UNIT #35, #165, #407cps 1174wElevation 6492 Completion Date 7/12/77 Total Depth 520' Land Type* N/ACasing, Sizes, Types & Depths N/AIf Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

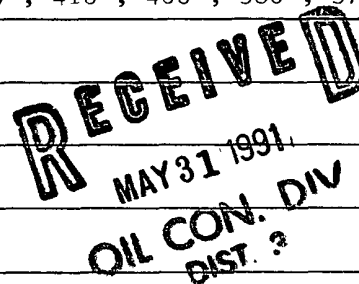Fresh, Clear, Salty, Sulphur, Etc. 325'Depths gas encountered: N/AType & amount of coke breeze used: 72 SACKSDepths anodes placed: 460', 450', 440', 430', 420', 410', 400', 380', 370', 360'Depths vent pipes placed: 475'Vent pipe perforations: 220'Remarks: gb #1

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto). ☐

Completion Date 7-12-77


Well Name <u>S.J. 28-6#35 & #165</u>		Location <u>NE 30-28-6</u>		CPS No. <u>1174W</u>	
Type & Size Bit Used <u>6 3/4</u>				Work Order No. <u>52724 & 55196</u>	
Anode Hole Depth <u>520-490</u>	Total Drilling Rig Time	Total Lbs. Coke Used <u>72</u>	Lost Circulation Mat'l Used	No. Sacks Mud Used	
Anode Depth					
#1 <u>460</u>	#2 <u>450</u>	#3 <u>440</u>	#4 <u>430</u>	#5 <u>420</u>	#6 <u>410</u>
#7 <u>400</u>	#8 <u>380</u>	#9 <u>370</u>	#10 <u>360</u>		
Anode Output (Amps)					
#1 <u>3.1</u>	#2 <u>2.5</u>	#3 <u>2.6</u>	#4 <u>3.5</u>	#5 <u>3.6</u>	#6 <u>3.5</u>
#7 <u>3.6</u>	#8 <u>3.3</u>	#9 <u>2.8</u>	#10 <u>2.9</u>		
Anode Depth					
#11	#12	#13	#14	#15	#16
#17	#18	#19	#20		
Anode Output (Amps)					
#11	#12	#13	#14	#15	#16
#17	#18	#19	#20		
Total Circuit Resistance				No. 8 C.P. Cable Used	No. 2 C.P. Cable Used
Volts <u>12.0</u>	Amps <u>12.5</u>	Ohms <u>0.96</u>			

Remarks: STATIC #35-600' N = 0.77 - #165, 600' W = 0.88
DRILLER SAID MAKING WATER @ 325'. DRILLED TO 360'. NEXT A.M.
WATER STANDING @ 325'. DRILLED TO 520'. PERFORATED 220' OF
1" PVC VENT PIPE. INSTALLED 475' OF 1" PVC VENT PIPE.
SLURRIED 72 SACKS OF COKE.
#35 MARKED 1 NOTCH & #165 MARKED 3 NOTCHES

All Construction Completed

W. J. Lutz
(Signature)

GROUND BED LAYOUT SKETCH

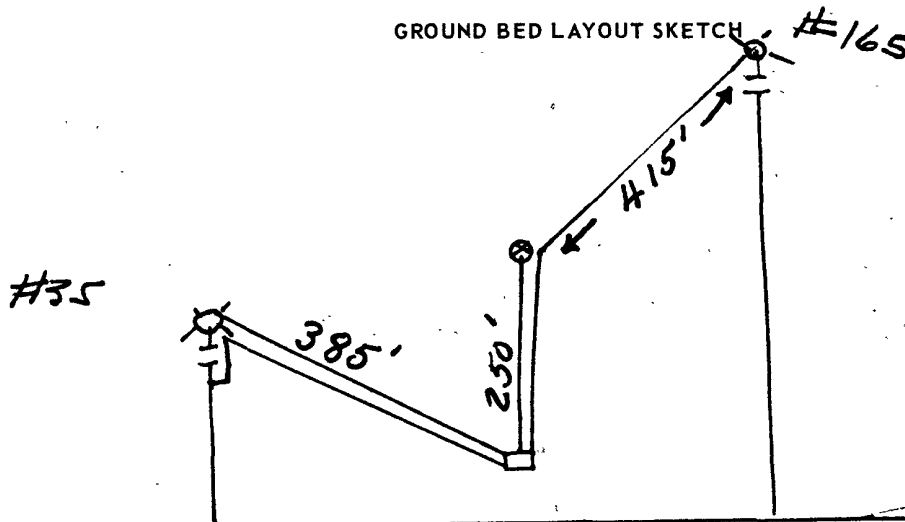

DISTRIBUTION:

WHITE - Division Corrosion Office
 YELLOW - Area Corrosion Office
 PINK - Originator File

64921

DAILY DRILLING REPORT

[illegible]

SIGNED: Toolpusher

____ Company Supervisor