

5-30-045-20492
12-30-045-20812

4584

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator TENNECO Location: Unit NE Sec. 18 Twp 29 Rng 8
Name of Well/Wells or Pipeline Serviced DAY A #5, DAY A #12
cps 78w
Elevation 6425' Completion Date 12/4/67 Total Depth 395' Land Type* N/A
Casing, Sizes, Types & Depths N/A
If Casing is cemented, show amounts & types used N/A
If Cement or Bentonite Plugs have been placed, show depths & amounts use
N/A
Depths & thickness of water zones with description of water when possible
Fresh, Clear, Salty, Sulphur, Etc. 250'
Depths gas encountered: N/A
Type & amount of coke breeze used: 3720 lbs.
Depths anodes placed: 365', 359', 353', 347', 341', 335', 329', 275', 269', 263'
Depths vent pipes placed: 365' OF 3/4" HOSE
Vent pipe perforations: 365'
Remarks: Log #2 ANODES DID NOT RESPOND TO COKE.
not a MERIDIAN well.

RECEIVED

MAY 31 1991

OIL CON. D
DIST. ?

If any of the above data is unavailable, please indicate so. Copies of a logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Handwritten signature/initials

No 2
GB

Date 12-4-67

4 3/4 #61 = 300


Well Name Day 5 A			CPS No. 78 W		
Location NE 18-29-8			Work Order No. 184-52235-50-24		
Anode Hole Depth 395	Total Drilling Rig Time 21 Hrs.	Type & Size Bit Used 6 1/4 - 6157 = 395		No. Sacks Mud Used 1	
No. Sacks Lost Circulation Mat'l Used 1	Anode Depth				
	# 1 365	# 2 359	# 3 353	# 4 347	# 5 341
Total Lbs. Coke Used 3720	Anode Output (Volts)				
	# 1 2.2	# 2 2.5	# 3 2.8	# 4 3.4	# 5 3.1
Total Circuit Resistance Volts 13.7	Amps 9.5	Ohms 1.44	No. Ft. Surface Cable Conduit 3588 on Anodes - 72 Surface = 3660		
Drilling Log (Attach Hereto): ☐					
	7 329	8 275	9 269	10 263	11 132
Remarks:					
	7 2.3	8 2.1	9 2.2	10 2.1	11 1.1

3/4" Hose to No. 1 Anode - Perforated - All
15 lbs Barafos circulated thru. Hole
Anodes Did Not Respond to Coke

All Construction Completed

Handwritten signature: Daniels
(Signature)

GROUND BED LAYOUT SKETCH

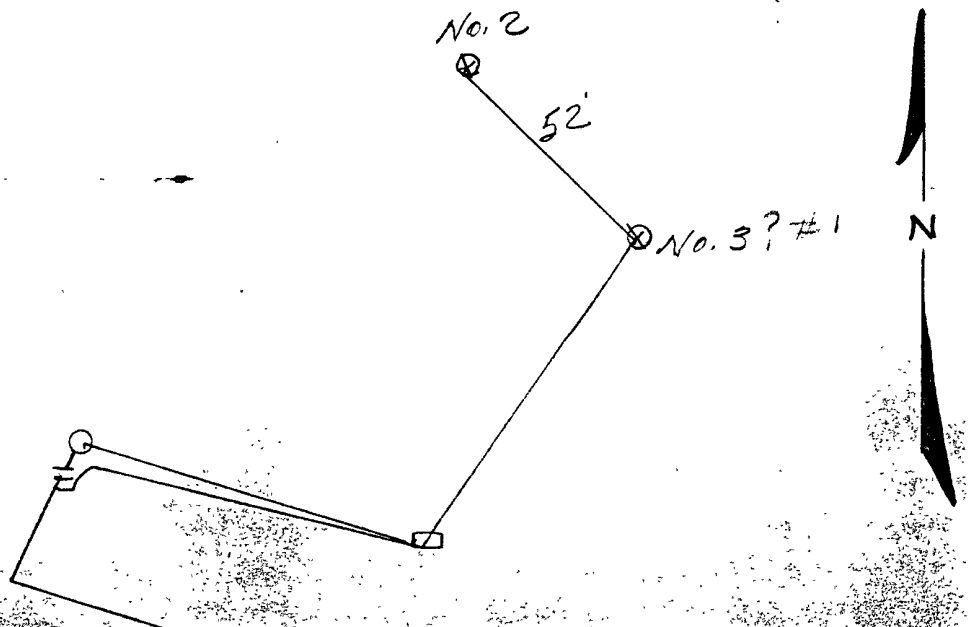

DRILLING DEPARTMENT

16

EVENING

Driller					Total Man in Crew					Driller					Total Man in Crew				
FROM	TO	FORMATION	WTEBIT	R.P.M.	FROM	TO	FORMATION	WTEBIT	R.P.M.	FROM	TO	FORMATION	WTEBIT	R.P.M.					
0	45	SS			330	270	SS			360	370	SSH							
45	60	SH			270	200	SH			370	395	SS							
60	100	SS			200	330	SS												
100	200	SH			330	960	SH												

[illegible]

REMARKS

1.50-61	Under 300' with 32' depth of 49%	Application at 100-125'
2.3-69	Offshore of 66' around 14-15' depth of 350'	Application at 100-125'
2.487	Offshore of 66' around 14-15' depth of 45'	Application at 100-125'

SIGNED: Foolpusthe

Company: Supervisor:

Formula