

30-045-26598 4304

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SE Sec. 14 Twp 30 Rng 10

Name of Well/Wells or Pipeline Serviced GRAMBLING C #13E

cps 376w

Elevation 6405' Completion Date 5/29/63 Total Depth 280' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 2300 lbs.

Depths anodes placed: 255', 249', 240', 175', 169', 140', 130', 124'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: gb #1

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED
MAY 31 1991

OIL CON. DIV.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

DATE 5-29-63

WELL NAME M.V. STRATAGRAPIE #2
~~Static Cathodic well~~

CPS NO. 376 W

LOCATION 14-30N-10W 1500'S 1500'E

WORK ORDER NUMBER 184-40542-50-02

ANODE HOLE DEPTH 280'

TOTAL DRILLING RIG TIME 9 1/2 hrs

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED _____

NUMBER SACKS MUD USED 4

NUMBER SACKS LOST CIRCULATION MAT'L USED 1

ANODE DEPTHS #1 255', #2 249', #3 240', #4 175' 5 169' 6 140' 7 120' 8 124'

TOTAL LBS. COKE USED 1955 lbs 2,300 # 23.5 KLS

ANODE OUTPUTS 12 VOLTS, #1 1.2, #2 1.1, #3 .95, #4 3.2 5 286 127 128

TOTAL CIRCUIT RESISTANCE: VOLTS 11.3 AMPERES 7.2 OHMS 1.67

NUMBER FEET SURFACE CABLE CONDUIT 178' #8 Solid

DRILLING LOG (ATTACH HERETO).

FORMATION LOG (ATTACH HERETO).

REMARKS: Static 9/5 = .80 R 600' S

Installed Meter Pole & Good-All 28V 12A Rect 500' 1200


Note: Meter loop NOT installed on Pole

NOTE: Anodes 1, 2, 3, 4, 5, 6 & 8 made up with #8 Solid

ALL CONSTRUCTION COMPLETED

E. Parkh
SIGNATURE

GROUND BED LAYOUT SKETCH

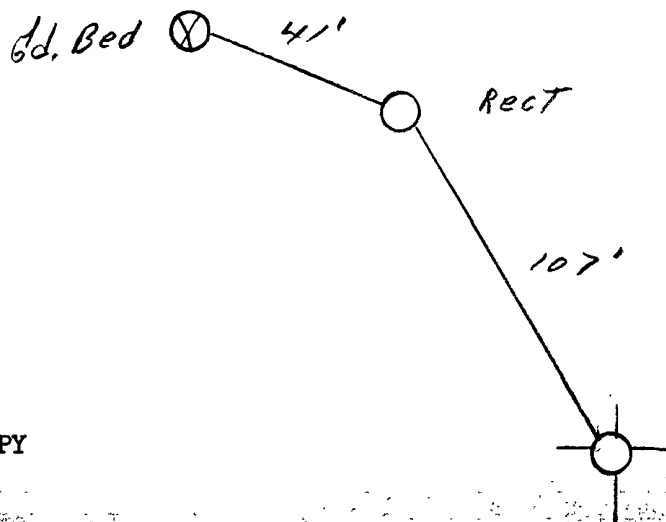

ORIGINAL & 1 COPY
ALL REPORTS

