

30-045-07889

4903

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 30 Twp 29 Rng 8

Name of Well/Wells or Pipeline Serviced BOLIN #1

1 cps 805w

Elevation 6494' Completion Date 9/9/63 Total Depth 200' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 1540 lbs.

Depths anodes placed: 170', 164', 125', 59', 53', 47', 41'

Depths vent pipes placed: N/A


Vent pipe perforations: N/A

Remarks: gb #1 RETIRED.

*Gb #1 Retired NOT Gb #2

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

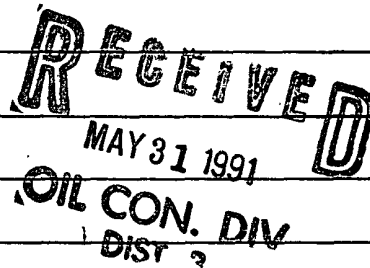

DATE 9-9-63

LOCATION NE 30-29N-8W

WORK ORDER NUMBER 20023

ANODE HOLE DEPTH 200'

TOTAL DRILLING RIG TIME 10 hrs

DRILLING TIME FOR RECTIFIER POLE HOLE 2

TYPE AND SIZE BIT USED _____

NUMBER SACKS MUD USED 0

NUMBER SACKS LOST CIRCULATION MAT'L USED 0

ANODE DEPTHS #1 170', #2 164', #3 125', #4 59' 5 53' 6 42' 7 41'

TOTAL LBS. COKE USED 14 sacks 1540 lbs

ANODE OUTPUTS: 12 VOLTS, #1 1.0, #2 1.0, #3 2.5, #4 2.7 51.6 61.0 ?

TOTAL CIRCUIT RESISTANCE: VOLTS 11.2 AMPERES 6.5 OHMS 1.72


NUMBER FEET SURFACE CABLE CONDUIT 1518'

DRILLING LOG (ATTACH HERETO).

FORMATION LOG (ATTACH HERETO).

REMARKS: STATIC C/GS = .77 A 600' E
Installed PCM 28V 12A Rect serial #637122
Durizon ANODES USED

E. Paulk
SIGNATURE

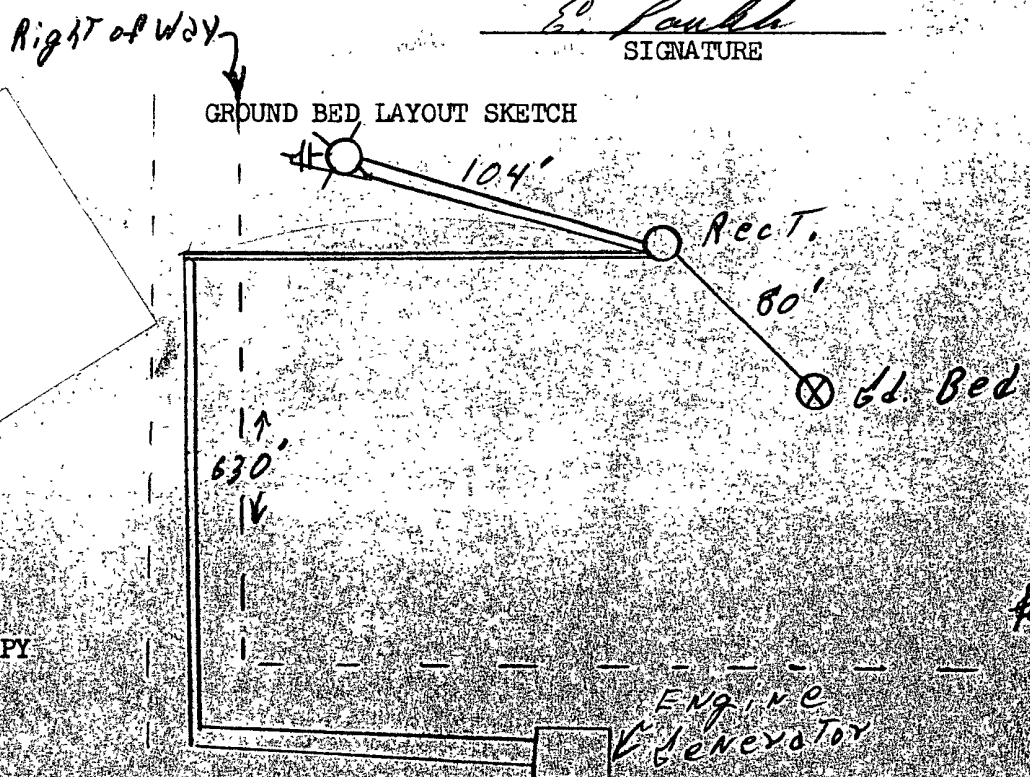

ORIGINAL & 1 COPY
ALL REPORTS

LEASE	WELL NO.	CONTRACTOR	RIG NO.	REPORT NO.	DATE
Colin Hardie	1	L. E. Wilson Drilling Co.	D-2		9-9-63
MORNING		DAYLIGHT		EVENING	

MORNING

DAYLIGHT

EVENING

Driller				Total Man In Crew				Driller				Total Man In Crew			
FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	
0	45	Sandy ss													
15	90	Sandy ss													
90	100	Sandy ss													
160	220	Sandy ss													
BIT NO.				NO. DC				SIZE				LENG.			
SERIAL NO.				NO. DC				SIZE				LENG.			
SIZE				STANDS				SINGLES				TOTAL DEPTH			
TYPE				DOWN ON KELLY				DOWN ON KELLY				TOTAL DEPTH			
MAKE				TOTAL DEPTH				TOTAL DEPTH				TOTAL DEPTH			
MUD RECORD				MUD, ADDITIVES USED AND RECEIVED				MUD RECORD				MUD, ADDITIVES USED AND RECEIVED			
Time				Vis.				Time				Vis.			
FROM				TO				FROM				TO			
TIME BREAKDOWN				TIME BREAKDOWN				TIME BREAKDOWN				TIME BREAKDOWN			
REMARKS				REMARKS				REMARKS				REMARKS			
100 ft yard 11:00 AM				100 ft yard 11:00 AM				100 ft yard 11:00 AM				100 ft yard 11:00 AM			
Arrived local 10:45 AM				Arrived local 10:45 AM				Arrived local 10:45 AM				Arrived local 10:45 AM			
Finished Hole 11:00 AM				Finished Hole 11:00 AM				Finished Hole 11:00 AM				Finished Hole 11:00 AM			
100 ft yard 11:00 AM				100 ft yard 11:00 AM				100 ft yard 11:00 AM				100 ft yard 11:00 AM			
Arrived local 10:45 AM				Arrived local 10:45 AM				Arrived local 10:45 AM				Arrived local 10:45 AM			
Finished Hole 11:00 AM				Finished Hole 11:00 AM				Finished Hole 11:00 AM				Finished Hole 11:00 AM			

DESIGNED BY: T. G. Hatcher

Company: Supervisior