

Feuille A #2 30-045-08383 5775
WOOD #3 30-045-08350

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

30-045-21451

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 17 Twp 29 Rng 10

Name of Well/Wells or Pipeline Serviced FEUILLE A #2, WOOD #3.

SAN JACINTO #10 cps 750w

Elevation 5701' Completion Date 1/19/67 Total Depth 300' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 120'

Depths gas encountered: N/A

Type & amount of coke breeze used: 2392 lbs.

Depths anodes placed: 286', 280', 274', 268', 262', 256', 244', 238', 232'


Depths vent pipes placed: 286' OF 3/4" HOSE

Vent pipe perforations: 280'

Remarks: gb: #2 DRILLED FIRST HOLE 330'. HIT GAS, ABANDONED.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

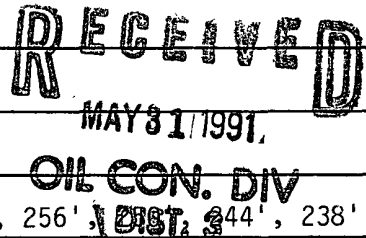

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

WELL CASING

CATHODIC PROTECTION CONSTRUCTION REPORT

DAILY LOG

Date 1-19-67

Well Name Klood No. 3						CPS No. 750W
Location NE 17-29-10						Work Order No. 184-91005
Anode Hole Depth 300	Total Drilling Rig Time 27 Hrs.*	Type & Size Bit Used 6 1/4 - 39319 = 300			No. Sacks Mud Used 0	
No. Sacks Lost Circulation Mat'l Used 0	Anode Depth #1 286 #2 280 #3 274 #4 268 #5 262 #6 256					
Total Lbs. Coke Used 2392	Anode Output (Volts) #1 5.1 #2 5.2 #3 5.4 #4 5.6 #5 5.9 #6 6.1					
Total Circuit Resistance Volts 12.2 Amps 16.4 Ohms 0.74	No. Ft. Surface Cable Conduit 2890 Anodes 355' surface = 3215					
Drilling Log (Attach Hereto). ☐ 7 250 8 244 9 238 10 232						
7 5.5 8 5.3 9 5.0 10 5.0						
Remarks:						

* Drilled 330; Hit Gas, Abandoned Hole - Drilled 2nd Hole 300
3/4" Hose to No. 1 Anode, Perforated 280' -

Did Not use Barafos on this GB.


Buried 2-23-67 OHS ✓

Positive Cable Not Buried To New CS

All Construction Completed

(Signature

GROUND BED LAYOUT SKETCH

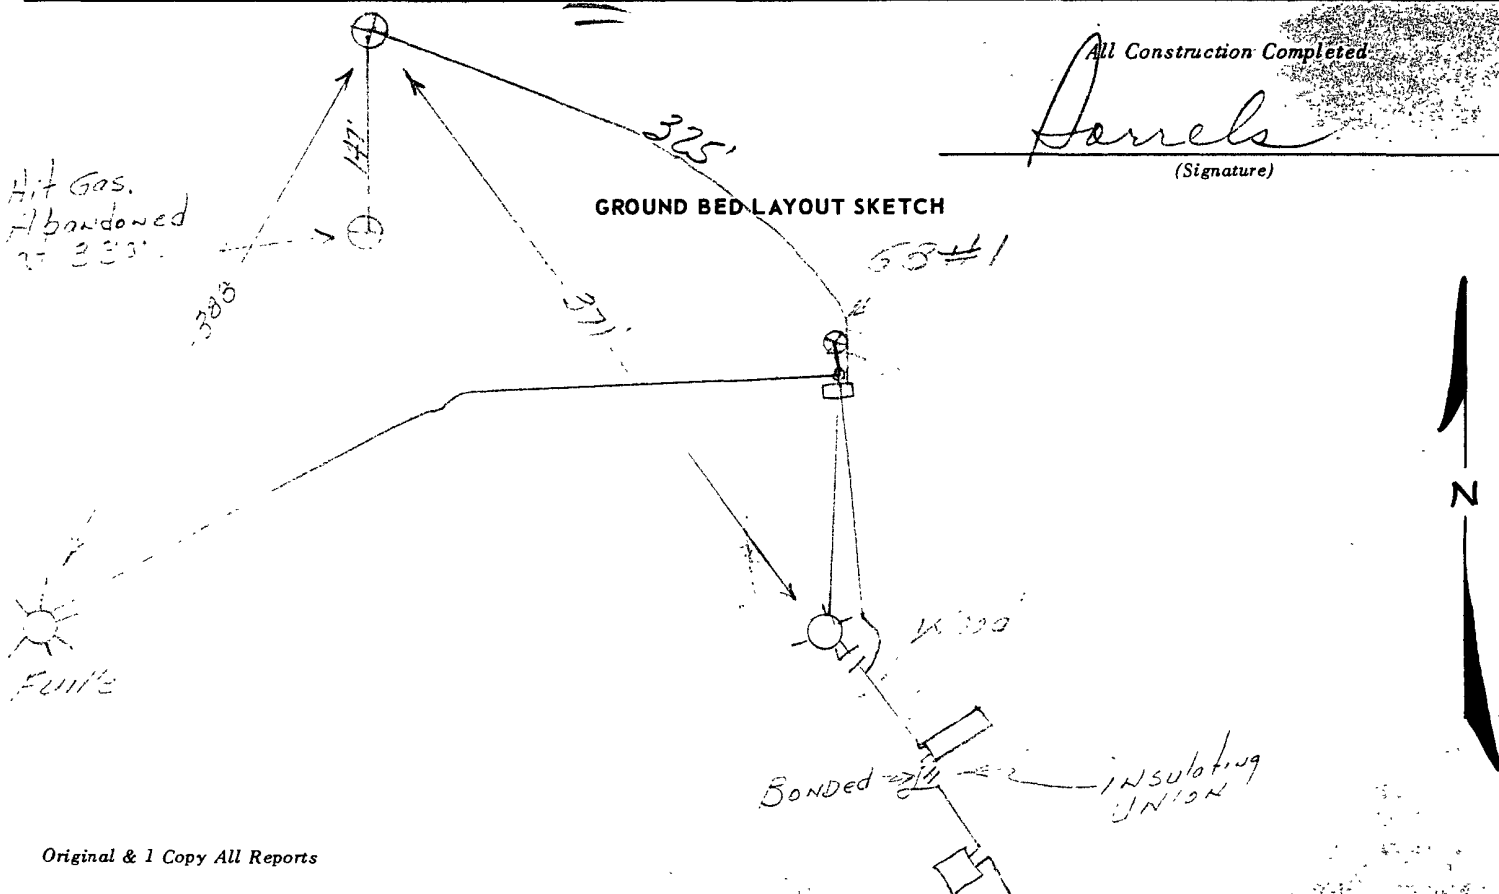

DAILY DRILLING REPORT

15

EVENING

Driller					Total Men In Crew					Driller					Total Men In Crew				
FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.
0	30	ALL			165	190	SSH												
30	100	SSH			190	240	SSH												
100	140	SSH			240	290	SSH												
140	165	SSH			290	340	SSH												

[illegible]

Page No. 2.

REMARKS -

REMARKS

REMARKS -

1-18-67 Hired at 600 (wired) 700 drilled 160 with 4
ing at 4:00

1-19-67 Drilled at 1200 (wired) and hole left location

$\frac{3}{4}$ used and 300' with 6' left

SIGNED: Toolpusher

Company Supervisor

Love