

95-30-039-07497

110 = 30-039-21331

5053

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 31 Twp 29 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 29-7 UNIT #95, #110

cps 1310w

Elevation 6605' Completion Date 8/22/69 Total Depth 280' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 76'

RECEIVED

MAY 31 1991

Depths gas encountered: N/A

OIL CON. DIV.
DIST. 3

Type & amount of coke breeze used: 5160 lbs.

Depths anodes placed: 271', 265', 239', 233', 227', 221', 196', 94'

Depths vent pipes placed: 265'

Vent pipe perforations: 265'

Remarks: qb #2 PLASTIC MOLD USED TO CAP ANODES. DID NOT USE SHRINK SLEEVE.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

5'10" #203 = 105
5" #2282 = 175

Drilling Log (Attach Hereto). ☒ #110

Completion Date 8-22-69

Well Name S.J. 29-7 #95		Location NE 31-29-7		CPS No. 116W	
Type & Size Bit Used 7 1/8-49061 = 280		Work Order No. 184-52276-50-20			
Anode Hole Depth 280	Total Drilling Rig Time 26 1/2	Total Lbs. Coke Used 5160	Lost Circulation Mat'l Used 0	No. Sacks Mud Used 2	
Anode Depth					
# 1 271	# 2 265	# 3 239	# 4 233	# 5 227	# 6 221
# 7 196	# 8 94	# 9	# 10		
Anode Output (Amps)					
# 1 4.5	# 2 4.5	# 3 3.0	# 4 3.4	# 5 3.5	# 6 3.5
# 7 2.9	# 8 5.0	# 9	# 10		
Anode Depth					
# 11	# 12	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Anode Output (Amps)					
# 11	# 12	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Total Circuit Resistance		No. 8 C.P. Cable Used		No. 2 C.P. Cable Used	
Volts 12.0	Amps 11.2	Ohms 1.07	1966	0	


Remarks: 3/4 Hose to No 2 Anode Perforated All
25 lbs Barafos

Plastic mold used to Cop Anodes Did Not use Shrink Slee.

All Construction Completed

Amels
(Signature)

GROUND BED LAYOUT SKETCH

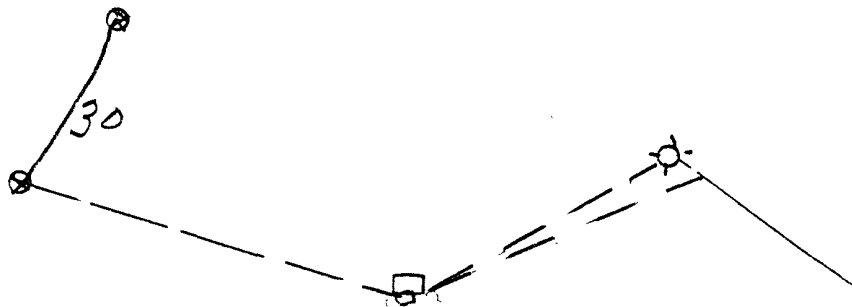

weos

156

[illegible]