

4- 30-045-10754
22- 30-045-22070 4856

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 17 Twp 31 Rng 10

Name of Well/Wells or Pipeline Serviced SCOTT #4, #22

cps 44lw

Elevation 6103' Completion Date 11/10/67 Total Depth 260' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 170'

Depths gas encountered: N/A

Type & amount of coke breeze used: 2640 lbs.

Depths anodes placed: 246', 240', 234', 228', 222', 216', 210', 204'

Depths vent pipes placed: 246' OF 3/4" HOSE

Vent pipe perforations: 246'

Remarks: qb #3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED

MAY 31 1991

OIL CON. DIV
DIST. 3

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

G.B. No. 3

Poster
4-8-71
Date 11-10-67

Well Name <u>Scott No. 4</u>			CPS No. <u>441 W</u>		
Location <u>NE 17-31-10</u>			Work Order No. <u>184-52113-50-20</u>		
Anode Hole Depth <u>260</u>	Total Drilling Rig Time <u>14 Hrs.</u>	Type & Size Bit Used <u>6 1/4 - 20</u>		No. Sacks Mud Used <u>2</u>	
No. Sacks Lost Circulation Mat'l Used <u>0</u>	Anode Depth	# 1 <u>246</u>	# 2 <u>240</u>	# 3 <u>234</u>	# 4 <u>228</u>
Total Lbs. Coke Used <u>2640</u>	Anode Output (Volts)	# 1 <u>3.5</u>	# 2 <u>4.2</u>	# 3 <u>4.0</u>	# 4 <u>3.0</u>
Total Circuit Resistance		# 5 <u>3.4</u>	# 6 <u>3.5</u>		
Volts <u>12.4</u>	Amps <u>10.5</u>	Ohms <u>1.18</u>	No. Ft. Surface Cable Conduit <u>1960 Anodes 100' Surface = 2060</u>		
Drilling Log (Attach Hereto) ☐		7 <u>210</u>	8 <u>204</u>		
Remarks:		7 <u>3.7</u>	8 <u>2.5</u>		

3/4" Hose to No. 1 Anode Perforated All

Did Not use Borafos to Flush This Hole


Relocated $F_{1/2}$ negative due to a new dehydrator installation

Note No 2 G.B. & No 3 G.B. = 11.7 V 13.6 A = 0.86 Ω

AN Construction Completed

Barrels
(Signature)

GROUND BED LAYOUT SKETCH

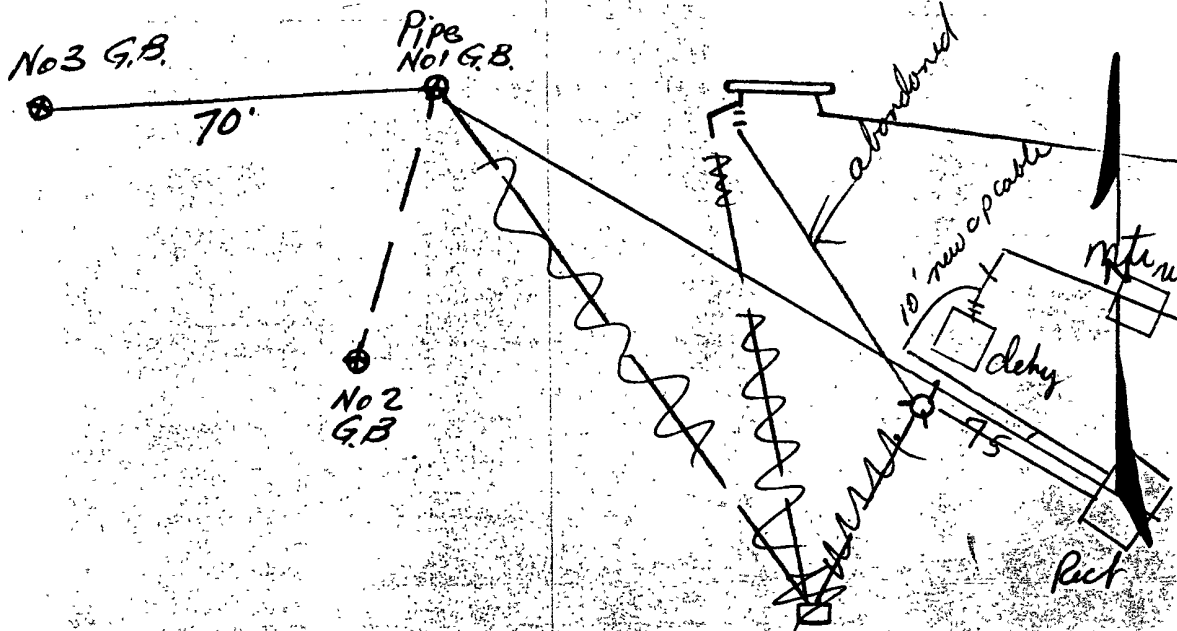

419

Donald