

#2 = 30-045-07461
#10 = 30-045-21165

4419

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 17 Twp 28 Rng 8

Name of Well/Wells or Pipeline Serviced TAPP #2, #10

cps 548w

Elevation 5891' Completion Date 3/28/68 Total Depth 280' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

8 SACKS REDI-MIX CONCRETE FROM 23' TO 14'

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. N/A

RECEIVED

MAY 31 1991

Depths gas encountered: N/A

OIL CON. DIV
DIST. 3

Type & amount of coke breeze used: 5160 lbs.

Depths anodes placed: 245', 239', 233', 227', 221', 215', 209', 203'

Depths vent pipes placed: 245' OF 3/4" HOSE

Vent pipe perforations: 120'

Remarks: qb #2

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

G.B. No 2

Date 3-28-68

4 3/4 #62 = 110


Well Name <u>Topp No. 2</u>			CPS No. <u>548 W</u>		
Location <u>NE17-28-8</u>			Work Order No. <u>184-20027-50-20</u>		
Anode Hole Depth <u>280</u>	Total Drilling Rig Time <u>17 1/2 Hrs</u>	Type & Size Bit Used <u>7 7/8 - 269595 = 280'</u>	No. Sacks Mud Used <u>0</u>		
No. Sacks Lost Circulation Mat'l Used <u>0</u>	Anode Depth				
	# 1 <u>245</u>	# 2 <u>239</u>	# 3 <u>233</u>	# 4 <u>227</u>	# 5 <u>221</u>
Total Lbs. Coke Used <u>5160</u>	Anode Output (Volts)				
	# 1 <u>7.4</u>	# 2 <u>7.0</u>	# 3 <u>6.7</u>	# 4 <u>7.0</u>	# 5 <u>7.0</u>
Total Circuit Resistance Volts <u>12.7</u>	Amps <u>17.5</u>	Ohms <u>0.72</u>	No. Ft. Surface Cable Conduit <u>200 surface 1952 Anodes 2152</u>		
Drilling Log (Attach Hereto): ☒		7 <u>209</u>	8 <u>203</u>		
Remarks:		7 <u>5.9</u>	8 <u>5.4</u>		

Note - No. 1 Anode is 2" x 60' All others 1 1/2" x 60' - Anodes No 1 & 2 - Capped By C.P.S. - others Capped in Field
3/4" Hose to No. 1 Anode - Perforated 120'
15 lbs Borafos circulated thru Hole -
100 lbs salt used while Drilling -
Hole Making small Amount of Water -
Used 8 Sacks Red.-Mix Concrete -
From 23' To 14' -

All Construction Completed

Arreals
(Signature)

GROUND BED LAYOUT SKETCH

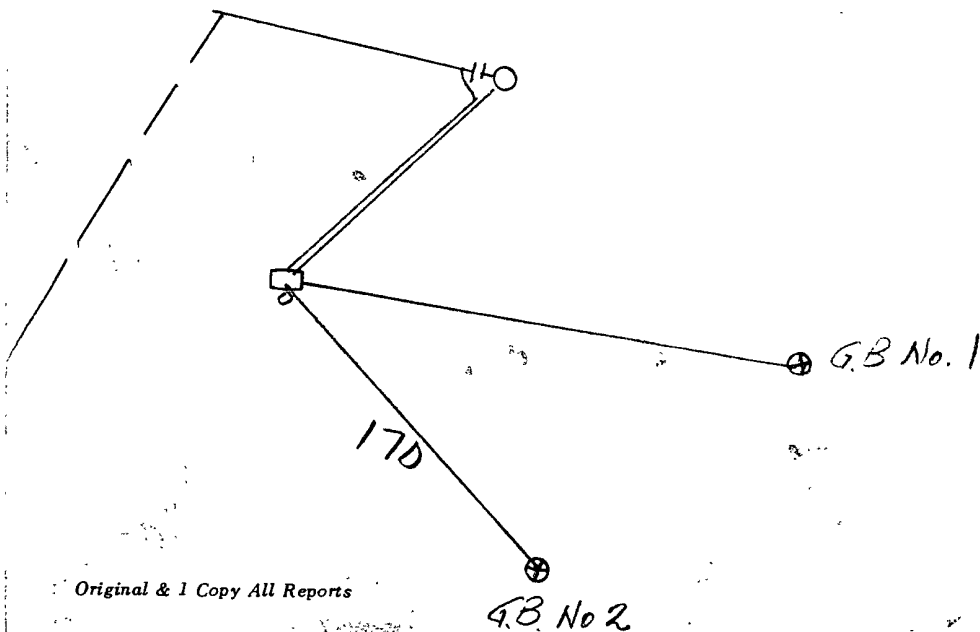

Wood no 62 1110

WELL NO. 3

Measure 1 Antis. RIG NO. 146

REPORT NO.

DATE _____

19

SIGNED: Todd Pushe

Company Supervisor

Panela