

#6 → 30-045-09513

#2A → 30-045-21784

4898

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NW Sec. 14 Twp 30 Rng 10

Name of Well/Wells or Pipeline Serviced GRAMBLING C #6, #2A

cps 81lw

Elevation 6461' Completion Date 11/29/68 Total Depth 535' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

RECEIVED

MAY 31 1991

Depths gas encountered: N/A

Type & amount of coke breeze used: 5600 lbs.

OIL CON. DIV

Depths anodes placed: 460', 454', 448', 435', 424', 418', 412', 406', 400', 355', 349', 343', 33

Depths vent pipes placed: 454' OF 3/4" HOSE

Vent pipe perforations: 454'

Remarks: Ggb #1 HOLE WAS CAVING. COULD ONLY GET DOWN TO 460'

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Date 11-29-68

Well Name <u>Crumbing #6C</u>		CPS No. <u>811W</u>	
Location <u>NW 14-30-10</u>		Work Order No. <u>184-54240-50-20</u>	
Anode Hole Depth <u>535</u>	Total Drilling Rig Time <u>85 Hrs</u>	Type & Size Bit Used <u>7 7/8, 12470 = 280, EV 693 = 140</u>	No. Sacks Mud Used <u>2</u>
No. Sacks Post-Circulation Mat'l Used <u>1</u>	Anode Depth		
	#1 <u>460</u>	#2 <u>454</u>	#3 <u>448</u>
	#4 <u>435</u>	#5 <u>424</u>	#6 <u>418</u>
Total Lbs. Coke Used <u>70 sacks - 5600</u>	Anode Output (Volts)		
	#1 <u>5.5</u>	#2 <u>5.7</u>	#3 <u>3.7</u>
	#4 <u>3.7</u>	#5 <u>4.2</u>	#6 <u>5.3</u>
Total Circuit Resistance			
Volts <u>12.0</u>	Amps <u>17.0</u>	Ohms <u>0.70</u>	No. Ft. Surface Cable Conduit <u>5501 on Anodes 333 surface = 5832</u>

Drilling Log (Attach Hereto) ☐	7 <u>412</u>	8 <u>406</u>	9 <u>400</u>	10 <u>355</u>	11 <u>349</u>	12 <u>343</u>
Remarks:	7 <u>5.0</u>	8 <u>4.5</u>	9 <u>4.0</u>	10 <u>4.1</u>	11 <u>5.0</u>	12 <u>5.0</u>

Static 600 E 98

3/4" Hose to No. 2 Anode, Perforated All

Hole started 10-26-68 - Complete 11-29-68

Hole was caving - could only get down to 460'


Had Rig Trouble on this hole - see log for details -

Circulated crude oil thru hole to free stuck Pipe

All Construction Completed

Parviz
(Signature)

GROUND BED LAYOUT SKETCH

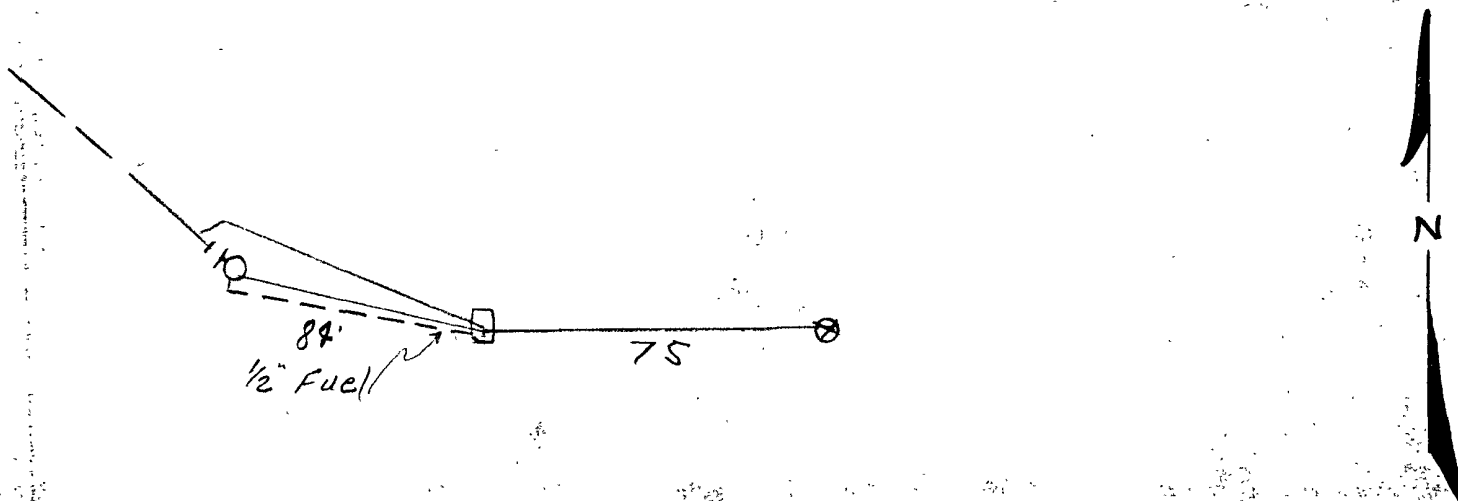

DAILY DRILLING REPORT

Page-1 of 2

LEASE *Franklin - C* WELL NO. *6* - *811* CONTRACTOR

RIG

REPORT NO.

DATE

19

[illegible]

SIGNED: Toolusher

COMPANYSUPERVISOR

EL PASO NATURAL GAS COMPANY
DRILLING DEPARTMENT

Page-2 of 2 DAILY DRILLING REPORT

LEASE *Glenn C #4* WELL NO. *811* CONTRACTOR RIG NO. REPORT NO. DATE 19

MORNING

DAYLIGHT

EVENING

Driller Total Men In Crew					Driller Total Men In Crew					Driller Total Men In Crew				
FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.
340	400	Reaming 7 7/8												
400	420	Sh. Drilling new hole.												
420	500	Sandy Sh. & SS.												
500	535	Hard SS.												

Driller Total Men In Crew					Driller Total Men In Crew					Driller Total Men In Crew				
FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.
340	400	Reaming 7 7/8												
400	420	Sh. Drilling new hole.												
420	500	Sandy Sh. & SS.												
500	535	Hard SS.												

Driller Total Men In Crew					Driller Total Men In Crew					Driller Total Men In Crew				
FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.
340	400	Reaming 7 7/8												
400	420	Sh. Drilling new hole.												
420	500	Sandy Sh. & SS.												
500	535	Hard SS.												

Driller Total Men In Crew					Driller Total Men In Crew					Driller Total Men In Crew				
FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.
340	400	Reaming 7 7/8												
400	420	Sh. Drilling new hole.												
420	500	Sandy Sh. & SS.												
500	535	Hard SS.												

Driller Total Men In Crew					Driller Total Men In Crew					Driller Total Men In Crew				
FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.
340	400	Reaming 7 7/8												
400	420	Sh. Drilling new hole.												
420	500	Sandy Sh. & SS.												
500	535	Hard SS.												

Driller Total Men In Crew					Driller Total Men In Crew					Driller Total Men In Crew				
FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.
340	400	Reaming 7 7/8												
400	420	Sh. Drilling new hole.												
420	500	Sandy Sh. & SS.												
500	535	Hard SS.												

SIGNED: Toolpusher

Company Supervisor

Forrester