

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS
*Do not use this form for proposals to drill or to re-enter an
Abandoned well. Use Form 3160-3 (APD) for such proposals.*

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

5. Lease Serial No.

SF - 078132

6. If Indian, Allottee or tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

☐ Oil Well

☒ Gas Well

☐ Other

8. Well Name and No.

Elliott Gas Com A 1B

2. Name of Operator

BP America Production Company Attn: Mary Corley

9. API Well No.

30-045-31841

3a. Address

P.O. Box 3092 Houston, TX 77253

3b. Phone No. (include area code)

281-366-4491

10. Field and Pool, or Exploratory Area

Blanco Mesaverde

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

2185' FNL & 880' FEL Sec. 14 T29N, R09W Unit H

11. County or Parish, State

San Juan County, New Mexico

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OR NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☒ Notice of Intent

☐ Subsequent Report

☐ Final Abandonment Notice

TYPE OF ACTION

☐ Acidize

☐ Alter Casing

☐ Casing Repair

☐ Change Plans

☐ Convert to Injection

☐ Deepen

☐ Fracture Treat

☐ New Construction

☐ Plug and Abandon

☐ Plug Back

☐ Production (Start/Resume)

☐ Reclamation

☐ Recomplete

☐ Water Disposal

☐ Water shut-Off

☐ Well Integrity

☐ Other Exception to

WOC time of 6 hrs.

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

BP is currently using 3% CaCl₂ in our slurry and achieves 300 psi compressive strength after 1 hr 50 min and 500 psi after 3 hrs 8 min. We, therefore, request approval to initiate blowout preventer (BOP) nipple up operations after a 2 hour wait on cement time in lieu of the 6 hour time frame required by rule to achieve 300 psi compressive strength with Class B cement slurry at 80 deg F.


3% CaCl₂ will be used, NOT 2% as originally approved.

14. I hereby certify that the foregoing is true and correct
Name (Printed/typed)

Mary Corley

Title **Senior Regulatory Analyst**

Signature



Date **10/02/2003**

per Harold Jordan
10/2/03

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

/s/ Jim Lovato

Title

Date

OCT - 9 2003

Conditions of approval, if any, are attached. Approval of this notice does not warrant or Certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office


Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Comply with Rule 1076 *CP*
NMOCD

CemCADE*

Client : bp
Well : Surface Job (80F)
String : 15.8 ppg G + 3% S001
District :
Country : USA

3S1_80°_cfw 09-22-2003 LoadCase Untitled Version wcs-cem431_19

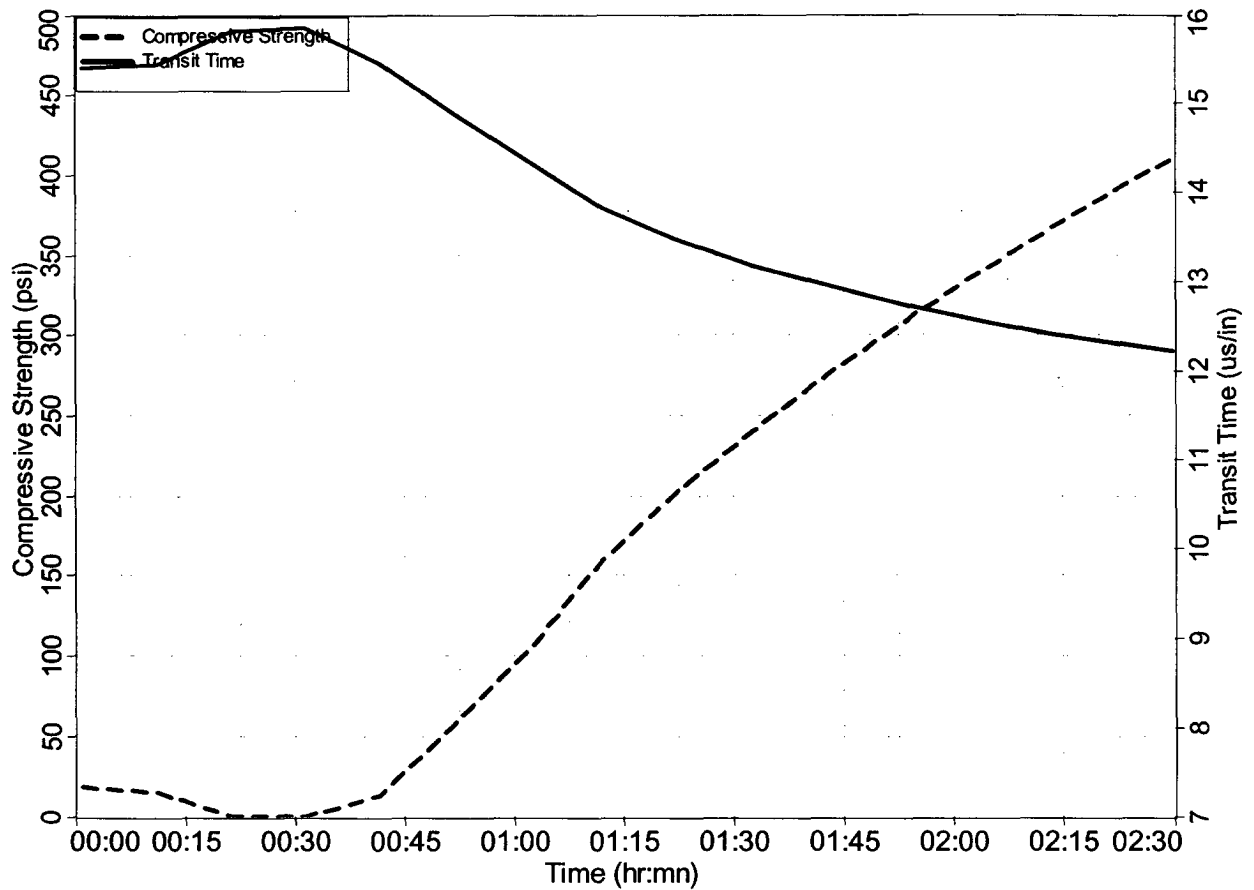

Lead Slurry Density = 15.80 lb/gal Time to 500 psi= 03:08 hr:mn Time to 1000 psi= 08:02 hr:mn

*Mark of Schlumberger

Schlumberger