

## DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS

ME-4

NORTHWESTERN NEW MEXICO  
(Submit 3 Copies to OCD Aztec Office)

30-045-27584

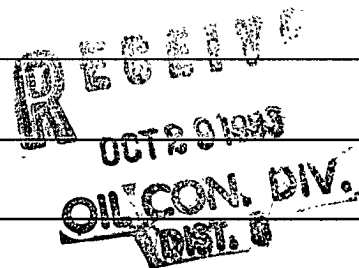
Operator: BLACKWOOD & NICHOLS CO. Location: Unit L, Sec. 6, Twp 31N, Rng 6W.Name of Well/Wells or Pipeline Served NEBU 426Elevation 6410' Completion Date 8-2-93 Total Depth 280' Land Type\* Surface: F Mineral: SF-078988Casing, Sizes, Types & Depths 8-5/8" SCH 40 P.V.C. - 100', 7-7/8" Open HoleIf Casing is cemented, show amounts & types used 20 sks Portland Zia I-II - 90# ea.If Cement or Bentonite Plugs have been placed, show depths & amounts used N/A

Depths &amp; thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. Fresh, 185' - 2 gal. per hour. NO Sample takenDepths gas encountered: N/AType & amount of coke breeze used: Asbury 3,000#Depths anodes placed: 184' - 265'Depths vent pipes placed: 280' to 4' above ground levelVent pipe perforations: 180' of Bottom P.V.C.Remarks: Ground bed is located 182° from North and 150' from wellhead.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

\*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.  
If Federal or Indian, add Lease Number.

Signed by: James K. AllenTitle: Operations Engineer Date: 8/27/93

BLACKWOOD & NICHOLS  
CATHODIC GROUND BED  
DRILLERS REPORT

P# ME-4 WELL# NEBU 426

S 06 T 31N R 6W

DEPTH	STRATA	NOTES	DEPTH	STRATA	NOTES
5'					
10'					
15'	HARD SHALE				
20'					
25'					
30'					
35'					
40'					
45'					
50'					
55'					
60'					
65'	X SHALE				
70'					
75'					
80'					
85'					
90'	V				
95'					
100'					

RILLER gene muntinez

INSPECTOR Joe Matyssek

# BLACKWOOD & NICHOLS CATHODIC GROUND BED DRILLERS REPORT

P# ME-4 WELL# N.E.B.U. # 426

IS 6 T 31 R 6

[illegible]

RILLER 

INSPECTOR M.D.M.