

1509

E

30-045-23.584

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit P Sec. 17 Twp 31 Rng 8Name of Well/Wells or Pipeline Serviced QUINN #7A

cps 6243w

Elevation N/A Completion Date 10/24/86 Total Depth 500' Land Type* N/ACasing, Sizes, Types & Depths N/AIf Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. NO WATERDepths gas encountered: N/AType & amount of coke breeze used: 2000 lbs.Depths anodes placed: 450', 440', 430', 420', 410', 380', 370', 360', 350', 340', 330', 320'Depths vent pipes placed: 460'Vent pipe perforations: 160'Remarks: gb #1**RECEIVED**
MAY 31 1991
OIL CON. DIV. 1
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

BURGE CORROSION SYSTEMS, INC.

P.O. BOX 1359 - PHONE 334-6141
AZTEC, NEW MEXICO 87410

Drilling Log (Attach Hereto). ☒

6243W

Completion Date October 24, 1986


Well Name Quinn #7-A		Location Union Texas Petroleum			
Type & Size Bit Used 6 3/4 inch				Work Order No.	
Anode Hole Depth 500 feet	Total Drilling Rig Time 6 hours	Total Lbs. Coke Used 2000 #	Lost Circulation Mat'l Used	No. Sacks Mud Used	
Anode Depth #1 450	#2 440	#3 430	#4 420	#5 410	#6 380
#7 370	#8 340	#9 330	#10 320		
Anode Output (Amps) #1 1.1	#2 2.4	#3 2.6	#4 2.9	#5 1.7	#6 2.3
#7 2.8	#8 2.1	#9 2.0	#10 1.7		
Anode Depth #11	#12	#13	#14	#15	#16
#17	#18	#19	#20		
Anode Output (Amps) #11	#12	#13	#14	#15	#16
#17	#18	#19	#20		
Total Circuit Resistance Volts 12.1	Amps 10.9	Ohms 1.11	No. 8 C.P. Cable Used 4215 feet	No. 2 C.P. Cable Used	

Remarks: Hole had to be filled with water in order to log. Hole was not making enough water to keep the hole full. Used 460 feet of 1 inch vent pipe with 160 feet of perforations.

All Construction Completed

Cody Munoz
(Signature)

GROUND BED LAYOUT SKETCH

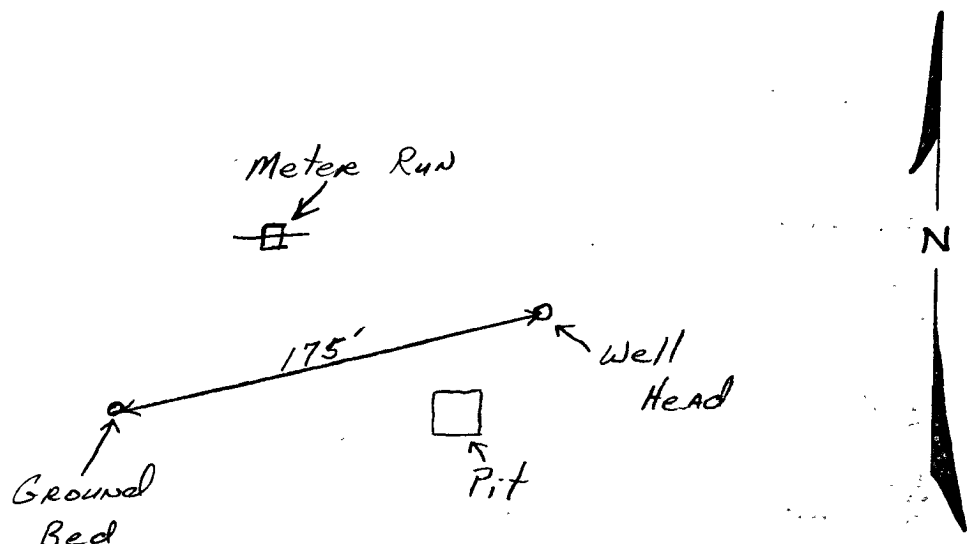

CORROSION CONTROL CO.

301 Ash

Aztec, New Mexico

COMPANY UNOIN TEXAS PETROLEUM

DAILY DRILLING REPORT

OCTOBER 23

1986

WELL NAME: QUINN 7-A	WELL NUMBER: 7-A	SECTION: 17	TOWNSHIP: 31	RANGE: 8
WATER AT Moisture only		FEET	HOLE MADE: 500'	

DESCRIPTION OF FORMATION

FROM	TO	FORMATION IS	COLOR
0	40	clay- wet	brwn
40	70	sandstone	yellow
70	90	shale	blue
90	130	bentonite- sand	white
140	160	sand	yellow
160	170	sand- bentonite	white
170	190	sandy shale	blue
190	200	sandy bentonite	white
200	260	sandy bentonite-shale streamers	wh/blue
260	270	shale	blue
270	320	sandy bentonite	white
320	340	shale	blue
340	370	sand	blueish
370	380	shale	blue
380	395	sand	bl/white
395	450	shale	blue
450	490	bentonite	white
490	500	sand	white

REMARKS: Moisture was present at several places. It made a minimal
amount of water. The hole was drilled dry throughout.

Brian E. Burge

Driller

Tool Dresser