

1484

7

30-045-25003

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit G Sec. 22 Twp 30 Rng 1

Name of Well/Wells or Pipeline Serviced MC CORD #4E

cps .6165v

Elevation N/A Completion Date 12/27/86 Total Depth 320' Land Type* N/A

Casing, Sizes, Types & Depths 100'

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible

Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 1600 lbs.

Depths anodes placed: 290', 280', 270', 260', 250', 240', 230', 220', 210', 200'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: gb #1

RECEIVED
MAY 31 1991
OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

BURGE CORROSION SYSTEMS, INC.

P.O. BOX 1359 - PHONE 334-6141
AZTEC, NEW MEXICO 87410

Drilling Log (Attach Hereto). ☐ *6080W*

Completion Date *12-27-86*


Well Name <i>McCord #4 E</i>		Location <i>Union Texas Petroleum</i>		C 22 30 13	
Type & Size Bit Used				Work Order No. <i>133</i>	
Anode Hole Depth <i>320</i>	Total Drilling Rig Time	Total Lbs. Coke Used <i>1600</i>	Lost Circulation Mat'l Used	No. Sacks Mud Used	
Anode Depth					
#1 <i>290</i>	#2 <i>280</i>	#3 <i>270</i>	#4 <i>260</i>	#5 <i>250</i>	#6 <i>240</i>
#7 <i>230</i>	#8 <i>220</i>	#9 <i>210</i>	#10 <i>200</i>		
Anode Output (Amps)					
#1 <i>3.4</i>	#2 <i>3.3</i>	#3 <i>4.5</i>	#4 <i>4.7</i>	#5 <i>4.3</i>	#6 <i>3.9</i>
#7 <i>4.6</i>	#8 <i>4.3</i>	#9 <i>3.8</i>	#10 <i>3.8</i>		
Anode Depth					
#11	#12	#13	#14	#15	#16
#17	#18	#19	#20		
Anode Output (Amps)					
#11	#12	#13	#14	#15	#16
#17	#18	#19	#20		
Total Circuit Resistance			No. 8 C.P. Cable Used	No. 2 C.P. Cable Used	
Volts <i>11.98</i>	Amps <i>20.6</i>	Ohms <i>0.58</i>	<i>2650</i>		

Remarks: *Negative 169 feet*

All Construction Completed

John Smith
(Signature)

GROUND BED LAYOUT SKETCH

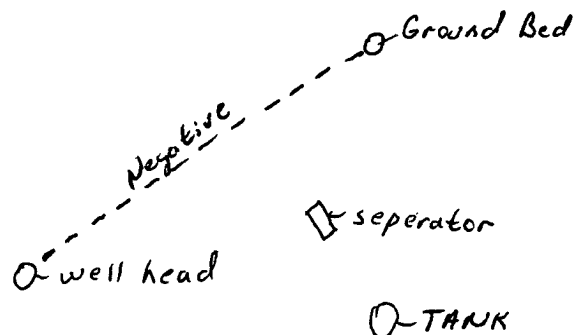

COMPANY Union Texas Petroleum DAILY DRILLING REPORT December 27 1986

WELL NAME:	WELL NUMBER:	SECTION:	TOWNSHIP:	RANGE:
McCord	H-E	22	30	13

80° 4' 180°

320

[illegible]

REMARKS:

Water volume was approx 15 gallons per minute.

Driller

Tool Dresser